

Environmental Noise Assessment Report | August 2021

Tweed Valley Hospital Project, Cudgen NSW

Prepared for: Lendlease Building Pty Ltd Job Number: LND-01-Q1299 NMA25.V1F Date: 10/09/2021



Environmental Noise Assessment Report Tweed Valley Hospital Project, Cudgen NSW



Document Information


Report Title: Environmental Noise Assessment Report Prepared for: Lendlease Building Pty Ltd Project Address: Tweed Valley Hospital Project, Cudgen NSW File Reference: LND-01-Q1299 Report Reference: NMA25.V1F Date: 10/09/2021

Document Control

Version	Date	Author	Revision description	Reviewer
V1D	08/09/2021		Draft for internal review	
V1F	10/09/2021		Final for issue to client	

For and on behalf of

ADE Consulting Group Pty Ltd

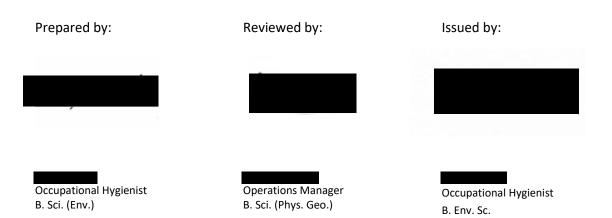

T. 1300 796 922 | E. info@ade.group

This report is copyright. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying without permission in writing from ADE Consulting Group Pty Ltd.



CONTENTS

1	Intr	oduction	1
	1.1	Project Background	7
	1.2	Monitoring Locations	3
	1.3	Monitoring Frequency	2
	1.4	Noise Management Levels	2
	1.5	Survey Instrumentation and Methodology16	5
	1.6	Existing Noise Environment	5
	1.7	Meteorological Conditions	7
	1.8	Out of Hours Work1	7
	1.9	Missing Data1	7
2	Res	ults18	3
3	Disc	ussion19)
4	Con	clusion19	•
5	Refe	erences)
Aŗ	pendi	x I – Aerial Photograph22	L
Ar	pendi	x II – Monitoring Locations	2
-	-	x III – Noise Graphs	



Executive Summary

Environmental noise monitoring was conducted at Tweed Valley Hospital Project, Cudgen NSW commencing on 26 July 2019 as per Lendlease Group requirements. This report will ensure environmental noise produced by the construction works on site comply with:

- Lendlease Building Pty Ltd Tweed Valley Hospital Management Plan Noise and Vibration;
- *NSW Work Health and Safety regulation (2017), clause 56 exposure standard for noise* for the duration of the project;
- Conditions C4 C7, C12 C14 and B16 of Schedule 3 of the consent; and
- NSW EPA's Interim Construction Guidelines.

ADE Consulting Group Pty Ltd has been commissioned by Lendlease to provide ongoing construction noise monitoring at three (3) locations within the Tweed Valley Hospital Project's boundary during construction works pertaining to the development (consent SSD-10353 – Construction of the Tweed Valley Hospital).

This report provides environmental noise monitoring data and analysis for the period of construction during August 2021.

The project's noise criteria are met at all times and do not exceed the limitations outlined within the relevant documentation approved within the Development Consent (SSD-10353). The works are compliant against the relevant guidelines. policies. procedures. and standards relating to noise on construction sites.

Summary of Exceedances for August 2021

No exceedances occurred throughout the month of August 2021.

Background Environmental Noise Level

Background environmental noise monitoring commenced on 26 July 2019 in three (3) separate locations. These locations are along the southern boundary of the site, near Cudgen Road (refer to *Appendix I – Aerial Photograph*). These monitoring locations were chosen to determine if noise being generated from the construction site complies with the levels stated in the above-mentioned guidelines. It has been determined that if the environmental noise levels at the boundary comply with the relevant guideline values, then the noise levels at the neighbouring properties would not be of great concern.

The time construction noise can be generated is regulated by the inclusion of standard construction hours that are regulated by Conditions C4 – C7 of Schedule 3 of the consent. According to condition C4, the recommended standard hours for construction work are:

Normal Construction – Monday to Friday 7am to 6pm Saturday 8am to 1pm No work on Sundays or public holidays

The background noise level has been assessed for the project and the EPA's Interim Guidelines mention that the management level of noise LAeq, 15 min should not be greater than 10 decibels above the background noise level during the normal construction times and no greater than 5 decibels outside of the normal construction times.

The background noise levels and results for monitoring conducted from 26 July to 31 July 2019 are listed in **Table 1** on the following page.



Table 1. Background Noise Levels.

BACKGROUND NOISE LEVELS dB(A)									
	Monitoring Location								
	001 Adjacent to carpark	002 Central location	003 Eastern section						
Day: 7am to 6pm	73	73	69						
Evening: 6pm to 10pm	63	62	60						
Night: 10pm to 7am	57	56	55						



Definitions

Weighting and Loudness:	The overall level of a sound is usually expressed as dBA and not dB. Weighting refers to the human ear's frequency response to sound. Typically, sound is measured with an A-weighted filter which reduces the significance of lower frequencies and very high frequencies, increasing the importance of mid-frequencies (500 Hz to 4 kHz), and being a good measure of the "loudness" of a sound. A change of 1 to 2 dBA is difficult to detect, whilst a change of 3 to 5 dBA corresponds to a small but noticeable change. A 10 dBA change corresponds to a doubling or halving in apparent loudness.
LAeq:	The time averaged A-weighted sound pressure level for the interval, as defined in AS1005.1. It is generally described as the equivalent continuous A-weighted sound pressure level that has the same mean square pressure level as a sound that varies over time. It can be considered as the average sound pressure level over the measurement period.
LAmin/LAmax:	Minimum or Maximum A-weighted noise level detected during the measuring period. It refers to the minimum background noise detected or the maximum Lp measured.
LA90:	A-weighted noise level which is exceeded for 90% of the measuring period. It is usually used as the descriptor for background noise level during the measurement period.
LA1:	Noise level which is exceeded for 1% of the measurement period.
LA10:	Noise level which is exceeded for 10% of the measurement period. The LA10 is often referred to as the average maximum noise level.
Background Noise:	The underlying level of noise present in the ambient noise, excluding the noise source, which is under investigation, when extraneous noise is removed.
Ambient Noise:	Ambient noise of an environment: the all-encompassing sound associated with that environment, being a composite of sounds from many sources.
Daytime	The time period between 07:00 and 18:00, same day, 08:00 to 18:00 Sundays and Public Holidays
Evening-time	The time period between 18:00 and 22:00, same day
Night-time	The time period between 22:00 and 07:00 the next day (08:00 Sunday)
Sound Pressure Level	$L_p = 10 log_{10} \left(\frac{p^2}{p_{ref}^2}\right) dB$
	In the above equation, p is the sound pressure fluctuation relative to atmospheric pressure, and <i>pref</i> is 20 microPascals (2 x 10-5 Pa), the approximate threshold of hearing.
	Sound or noise is the sensation produced at the ear by small fluctuations in atmospheric pressure. Human ears are sensitive to changes to sound pressure over a wide range, from 20 microPascals to 60 Pascals, in lieu of using a linear scale to represent this range, a logarithmic scale is adopted to better handle.
Sound Power Level	Sound power level cannot be directly measured using a microphone, it does not change with distance and is not influenced by atmospheric conditions. The sound power level refers to the total energy of the sound and is reference to 1 Pico Watt.



1 Introduction

1.1 Project Background

ADE Consulting Group Pty Ltd (ADE) was commissioned by Lendlease Building Pty Ltd (Lendlease) to assess the levels of construction related noise during the construction of the Tweed Valley Hospital Project, located at 771 Cudgen Road, Cudgen NSW (hereinafter referred to as 'the Site').

At the time of the environmental noise monitoring, Lendlease were continuing superstructure works on site. The purpose of environmental noise monitoring is to:

- Assess construction related air borne noise levels against regulatory requirements, development consent conditions, Australian guidelines, and international standards for construction noise management and control on construction sites;
- Mitigate potentially excessive noise generation through site planning and the adoption of appropriate work methods and practices where feasible and reasonable;
- Monitor and assess construction impacts likely to cause annoyance to the amenity on surrounding sensitive receivers, and provide feasible and reasonable recommendations to manage the impacts; and
- Establish and maintain positive relationships with project stakeholders.

The purpose of the Noise Monitoring Assessment (NMA) report is to assess the impacts construction activities from the Tweed Valley Hospital Project have had on noise levels on site and ensure compliance with the Tweed Valley Hospital Management Plan – Noise and Vibration and conditions **C4** – **C7**, **C12** – **C14** and **B16** from the development consent (refer to **Table 3**).

Site Details	
Client Name:	Lendlease Building
ADE Project Number:	LND-01-Q1299
Site Address:	771 Cudgen Road, Cudgen NSW (Lot 11 DP 1246853)
Date of Report:	10/09/2021
Development Consent	SSD-10353, Health Administration Corporation. Authorized by the Minister for Planning and Public Spaces on 9 March 2020. Consent approved on 12 June 2020.
Objectives:	 Comply with relevant guidelines and conditions C4 – C7, C12 – C14 and B16 of the SSD-10353 consent; Manage potential airborne construction noise impacts from construction activities which have the potential to affect the nearby noise sensitive receivers (Kingscliff TAFE and residential properties); and Establish and maintain good relationships with the neighbours and wider community.
Key Legislation:	 Protection of the Environment Operations Act 1997 (NSW) (POEO Act). The POEO Act is a key piece of environmental protection legislation and regulates activities via: Environmental protection licensing, as per schedule 1; Regulation of scheduled and non-scheduled activities; Environmental protection offences and penalties; and Establishment of a general duty of care to notify environment harm.

Table 2. Project Specific Information.



Table 3. Development Consent Conditions.

Conditions of Approval Number		Condition Requirements
	C4	 Construction, including the delivery of materials to and from the site, may only be carried out between the following hours: (a) Between 7 am and 6 pm, Mondays to Fridays inclusive; and (b) Between 8 am and 1 pm, Saturdays No work may be carried out on Sundays or public holidays.
Construction Hours	C5	 Construction activities may be undertaken outside of the hours in condition C4 if required: (a) By the Police or a public authority for the delivery of vehicles, plant or materials; or (b) In an emergency to avoid the loss of life, damage to property or to prevent environmental harm; or (c) Where the works are inaudible at the nearest sensitive receivers; (d) Where a variation is approved in advance in writing by the Planning Secretary or his nominee if appropriate justification is provided for the works; or (e) For the delivery, set-up and removal of construction cranes, where notice of the crane related works is provided to the Planning Secretary and affected residents at least seven days prior to the works.
	C6	Notification of such construction activities as referenced in condition C5 must be given to affected residents before undertaking the activities or as soon as is practical afterwards.
	С7	The construction hours must include respite periods and specific times for activities during the day (outside the sensitive times), as required by condition B16 of this consent, for the high noise generating construction activities (such as activities that would reach or exceed the Highly Affected Noise Level as defined in the ICNG).
oise Limits	C12	The development (including roadworks) must be constructed to achieve the project specific construction NMLs detailed in the Noise and Vibration Impact Assessment for SSDA Tweed Valley Hospital Stage 2' by JHA dated 19/09/2019. Additional mitigation measures must be implemented and any activities that are likely to exceed the NMLs or the high affected noise level of 75dB(A) in accordance with the management and mitigation measures in Appendix 3 and the approved CNVMSP required by condition B16 .
Construction N	C13	Any noise generated during construction of the development must not be offensive noise within the meaning of the Protection of the Environment Operations Act 1997 or exceed approved noise limits for the site.
Cons	C14	Unattended long-term construction noise monitoring must be undertaken during the duration of the Stage 2 works, consistent with the Stage 1 works in SSD-9575. The location of the loggers and the details of the monitoring methods including the reporting methods should be consistent with the CNVMSP in condition B16 and the Stage 1 works in SSD-9575.

1.2 Monitoring Locations

The Site is bounded by Tweed Coast Road to the West, Turnock Street to the East and Cudgen Road to the South at Cudgen, NSW (refer to Appendix I – Aerial Photograph).

Lendlease requested ADE to set up three (3) Sound Level Meters (SLM) within the Site to assess the levels of noise prior to the sound leaving the site.




Monitoring to determine the Background Noise Levels commenced on 26 July 2019 and continued until 31 July 2019 before the works started. These background noise levels were determined for the various time periods during the 24-hour day (refer to **Table 4**).

The original baseline noise assessment undertaken in 2018 by Acoustic Studio (in which the NMLs were established) was undertaken at three (3) locations along Cudgen Road. These locations are heavily influenced and dominated by road traffic noise.

The road traffic noise has been considerably consistent over the past three years (since logging data has been available). Based on this observation, the distance correction is reverted to the original limitations, as the background and ambient levels are driven the road traffic noise.



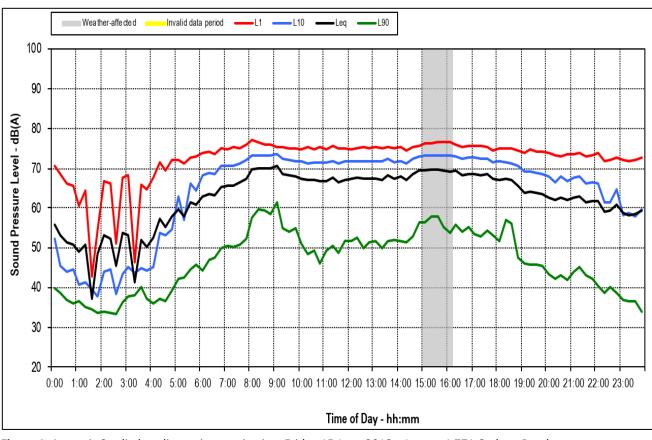

This correlation over time is demonstrated below in Figure 1, Figure 2, and Figure 3.

Figure 1. Acoustic Studio baseline noise monitoring, Friday 15 June 2018 – Logger 1 771 Cudgen Road.

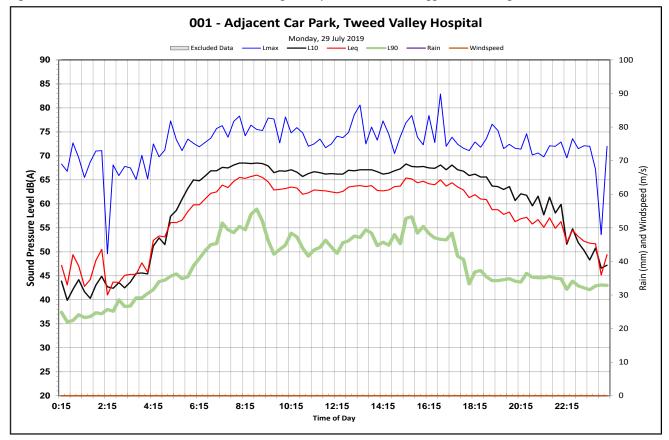


Figure 2. ADE noise monitoring prior to construction, Monday 28 July 2019.



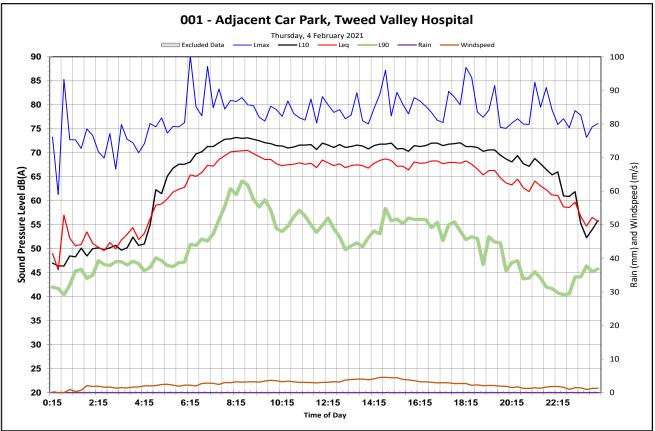


Figure 3. ADE noise monitoring during construction, Thursday 24 February 2021.

These graphs provide a visual context for the ambient environment at the logger's position along Cudgen Road. The road traffic noise (categorized by a 3 dB correlation between the Leq and L10) are consistent throughout the week period during construction as it is prior to construction (observable 12 months apart between June 2018 and July 2019).

Further, noise levels measured over time have not fluctuated significantly to determine the impact of construction. In some cases, the noise levels have decreased (likely due to COVID-19 and increase in working from home flexibility).

A brief overview of the pre-construction, and during construction noise levels is provided below in Table 4.



Location	Period	LAeq			Rating Background Level			LAeq15/9hr		LAeq,1hr	
Location	Peniou	Day	Evening	Night	Day	Evening	Night	Day	Night	Day	Night
001	Acoustic	68	63	58	49	43	34	66	58	67	57
002	Studios 2018 Pre-	65	61	57	47	39	38	64	57	66	56
003	construction	63	58	54	45	43	38	62	53	64	52
001	ADE	64	58	54	46	42	37	63	54	65	57
002	Pre- construction	63	58	55	49	41	37	63	55	64	58
003	July 2019 ^a	60	56	53	48	43	39	60	53	61	55
001	ADE	67	63	60	51	40	38	64	57	68	63
002	February 2021 During	64	61	57	47	40	36	61	56	62	56
003	Construction	58	55	54	46	43	39	56	53	58	52

Table 4. Noise Levels Over Time | 2018 – 2021.

Note A: Extraneous noise has been removed, weather affected data has not. Results may be lower. Weather data was unavailable during reanalysis of historical data.

1.3 Monitoring Frequency

Monitoring is to be carried out for the duration of the project in these locations as per the client request according to the Interim Construction Guideline NSW EPA 2009. Realtime data from the continuous monitoring of the levels of noise is uploaded to cloud storage which is accessed by ADE consultants to monitor the levels of noise. Noise levels downloaded from the cloud will be averaged every 15 minutes ($L_{Aeq(15 min)}$) and compared with the Management Levels.

1.4 Noise Management Levels

Noise management levels depend on the noise receivers, the time and the day. For residences, the levels are established depending on the day, the time and the rating background level (RBL). A summary of all relevant noise criteria is provided in the below sections.

NSW Interim Construction Noise Guideline

The standard construction hours are defined in the *Interim Construction Noise Guideline* (ICNG, DECC 2009) as:

- Monday to Friday 07:00 hrs to 18:00 hrs;
- Saturday 08:00 hrs to 13:00 hrs; and
- No work on Sundays or Public Holidays.

Table 5 on the following page provides guidance noise management levels for residential premises for airborneconstruction noise, reproduced from the ICNG.



Table 5. Guideline Noise Levels for Residential Premises, Airborne Construction Noise (ICNG).

Time of Day	NML	How to Apply
Standard hours Monday to Friday 7:00 am to 6:00 pm Saturday 8:00 am to 1:00 pm No work on Sundays or Public Holidays	Noise Affected RBL + 10 dB Highly Noise Affected >75 dBA	 The noise affected level represents the point above which there may be some community reaction to noise. Where the predicted (or measured LAeq (15 minute) is greater than the noise affect level, the proponent should apply all feasible and reasonable work practices to meet the noise affected level The proponent should also inform all potentially impacted residents of the nature of works to be carried out, the expected noise levels and duration, as well as contact details The highly noise affected level represents the point above which there may be a strong community reaction to noise. Where noise is above the level, the relevant authority (consent, determining or regulatory) may require respite periods by restricting the hours that the very noisy activities can occur, taking into account: Times identified by the community when they are less sensitive to noise (such as before and after school for works near residences If the community is prepared to accept a longer period of construction in exchange for restrictions on construction times
Outside recommended standard hours	Noise affected RBL + 5 dB	 A strong justification would typically be required for works outside the recommended standard hours The proponent should apply all feasible and reasonable work practices to meet the noise affected level Where all feasible and reasonable practices have been applied and noise is more than 5 dBA above the noise affected level, the proponent should negotiate with the community

Other Sensitive Land Uses and Commercial Receivers

The Site is surrounded by a number of non-residential land uses. These include:

- Kingscliff TAFE, an educational facility approximately 10 m south/south-east;
- Kingscliff Library, approximately 380 m north-east;
- Tweed Regional Aquatic Centre, approximately 130 m east;
- Kingscliff High School, approximately 500 m south/south-east; and
- Jack Julius Park passive recreational area, approximately 650 m south-east.

Residential Noise Criteria Summary

The measured background noise levels are used to determine the noise management level (NML) for the project. These NMLs are summarised in **Table 6**.



Table 6. Noise Management Level (dB LAeq, 15min) for Residential Receivers.

NCA	Logger ID ¹	Standard Hours (RBL+10)	Out of Hours (RBL +5)				
		Day	Day	Evening	Night		
NCA-A	2	55	50	48	43		
NCA-B	3	57	52	43	41		

Note: No works are proposed or are undertaken during OOH time periods

Note 1: Logger ID based off Acoustic Studio Report. Two loggers were used for NCA-B (ID 1 and 3), the lowest logger data is used to establish controlling criteria as per the NPfl and INP (Industrial Noise Policy, 2000)

All calculated distance corrected Management Levels are identified in **Table 7** on the following page.

The SLMs for the project are set up within the construction site, so results from them cannot be directly compared with the Management Levels identified above because they are not measuring the level of noise received by the receptors.

ADE has calculated for each receptor the Management Levels based on:

- The distance in between the receptor and the location of the SLM;
- The distance in between the SLM and the location of the works performed; and
- Knowing that there is a reduction of approximately 6dB(A) for each doubling of distance.



Table 7. Calculated Noise Management Levels.

Location	Receptor	Management levels fo	or the nearest receptors based on the dist	ance in between the location of the wo	rks and the sound level meter [dB(A)]
	Hardy Electrical& Solar	>86 meters from SLM	86-43 meters from SLM	43-14 meters from SLM	14-6 meters from SLM
	(Industrial) 43 meters from the SLM	Day: 75	Day: 81	Day: 87	Day: 93
01 Adjacent to		>72 meters from SLM	72-36 meters from SLM	36-12 meters from SLM	12-5 meters from SLM
arpark –		Day: 73	Day: 79	Day: 85	Day: 91
IGARA2	764 Cudgen Rd, Kingscliff (Residential)	Evening: 63	Evening: 69	Evening: 75	Evening: 81
	36 meters from the SLM	Night: 57	Night: 63	Night: 69	Night: 75
		Highly Noisy: 75	Highly Noisy: 81	Highly Noisy: 87	Highly Noisy: 93
	806 Cudgen Rd, Kingscliff (Residential) 56 meters from the SLM	>112 meters from SLM	112-56 meters from SLM	56-18 meters from SLM	18-8 meters from SLM
02 Central		Day: 73	Day: 79	Day: 85	Day: 91
ocation –		Evening: 62	Evening: 68	Evening: 74	Evening: 80
IGARA1		Night: 56	Night: 62	Night: 68	Night: 74
		Highly Noisy: 75	Highly Noisy: 81	Highly Noisy: 87	Highly Noisy: 93
		>94 meters from SLM	94-47 meters from SLM	47-15 meters from SLM	15-7 meters from SLM
		Day: 69	Day: 75	Day: 81	Day: 87
	64 Cudgen Rd, Kingscliff (Residential) 50 meters from SLM	Evening: 60	Evening: 66	Evening: 72	Evening: 78
03 Eastern	So meters nom selvi	Night: 55	Night: 61	Night: 67	Night: 73
section – NGARA3		Highly Noisy: 75	Highly Noisy: 81	Highly Noisy: 87	Highly Noisy: 93
GANAS	Tweed Regional Aquatic Centre –	>166 meters from SLM	166-83 meters from SLM	83-27 meters from SLM	27-12 meters from SLM
	Kingscliff (Active recreation area) 105 meters from SLM	65 dB(A)	71 dB(A)	77 dB(A)	83 dB(A)

Note: Highlighted in yellow are the more restrictive levels.



1.5 Survey Instrumentation and Methodology

At all locations the SLM was enclosed in a tough case which remained at ground level with an extension pole attached to the case with the microphone mounted on top of the pole. The height of the microphone was approximately 1.5m above the ground level.

A wind shield was placed on each microphone to reduce any wind interference during the measurements. The SLM's microphone is orientated toward the noise sources for all measurements and the area in between the sound level and the noise source was free from any temporary obstacles.

Measurements were carried out since the commencement of the background monitoring on the 26 July 2019 and record in all weather conditions.

The primary measurement parameter was the equivalent continuous A-weighted Sound Pressure Level, L_{Aeq} 15. The L_{Aeq} 15 is the average sound level recorded over 15 minutes. The A-weighting is used as it places emphasis on the middle frequencies of the noise spectrum, while putting less emphasis on the higher and lower frequencies. This emulates the way the human ear responds to sound.

An alarm beacon was set-up with the noise monitors to alert Lendlease and the Site Supervisor in the case of an exceedance in real-time. If the alarm was triggered, Lendlease and the Site Supervisor would receive an email and need to note the date and time, document the activity and consider implementing controls and reviewing work practices before re-commencing works.

Monthly checks of the levels of noise measured by each SLM are being carried out to validate the data with a portable sound level calibrator. If the instrumentation system registers a discrepancy equal to or greater than 1 dB between consecutive checks, any measurement in the interval between the two checks will be considered invalid.

Lendlease has established a daily check list on site to ensure all monitors are operating in the field correctly, have adequate sunlight to power the units and that they are reporting consistently. Lendlease will report any issues immediately to ADE. Furthermore, ADE will conduct daily checks via telemetry to ensure the monitors are operating and recording correctly. ADE are to advise Lendlease of any issues immediately. Monitors will not be removed unless consultation with Lendlease, TSA and HI has occurred and alternative locations are agreed upon.

1.6 Existing Noise Environment

The main noise sources in the area are:

- Construction noise from the Site, including trucks moving to and from the Site;
- Traffic noise (trucks and cars) from the adjacent roads (Cudgen Road);
- Foot traffic noises from workers/people walking around and past the Site; and
- Noises from the workers and mobile plant who use the parking area.



1.7 Meteorological Conditions

Measurements under raining and windy conditions (greater than 18 Km/h) increase the measured levels of noise and when this happens noise levels measured can become highly variable. Noise levels during raining and windy conditions were not included in the results of this report due to the high variability that these weather conditions may cause.

Meteorological conditions representative of the site have been provided by the Coolangatta weather station from the Bureau of Meteorology from the Australian Government. The Coolangatta weather station is the closest weather station that provides rainfall and wind data in 15-minute intervals that are required to accurately assess the noise levels.

1.8 Out of Hours Work

Nil for this period.

1.9 Missing Data

Nil for this period.



2 Results

Results from the A-weighted equivalent continuous noise level over a 15-minute period for each monitoring location are shown in Appendix III. Data recorded during rain or windy periods has been omitted from the results of this report, as these values are highly variable. Please note all data is presented in Australian Eastern Daylight Time (AEDT).

A summary of the results of the monitoring survey are presented below in Table 8.

		Measured Noise Levels, dBA										
Logger ID	Average Noise Level (LAeq)		Background Noise Levels (RBL)			RNP Defined Noise Level (L _{Aeq}) ¹						
	Day	Evening	Night	Day	Evening	Night	Day, 15 hr	Day, 1 hr				
001	68	63	60	51	39	39	69	57				
002	67	61	59	50	39	38	68	55				
003	61	54	52	47	39	38	60	49				

 Table 8. Unattended Noise Monitoring Results.

Note: The EPA document Road Noise Policy (RNP, 2011) is used to provide road traffic noise levels for the 15-hour day-time period, and the busiest daytime 1-hour. These levels are for historical correlation purposes.

Legitimate construction noise impacts (such as loud bangs, dropping of heavy machinery, jack hammering/rock breaking, alarms etc) would be impacted at all three (3) loggers with varying noise levels, correlated through graphical analysis.

When an event occurs it is discarded if it cannot be demonstrated that the event occurred on site which could be viewable within the graphs at all three (3) locations. An event which is detected at each three (3) locations can be reasonably assumed to have occurred on site and is then investigated further.

Twenty (20) noise events were identified during this monitoring period for further investigation. One (1) event was associated with road traffic noise (i.e., a truck horn or airbrake) occurring along Cudgen Road. Seventeen (17) events did not correlate with any construction activities and are therefore assumed to be an unknown off-site source as they are not consistent with RTN. They are not judged to be noise events occurring on site, or within the boundary of the project. These events were dismissed from the analysis.

Two (2) noise events were identified as occurring on-site. Both events were correlated with machinery (crane) operating within approximately 0-10 metres of the logging equipment. On further assessment, both events are below the relevant noise management limits (NMLs) when distance corrected.



3 Discussion

The measured noise levels presented in **Table 8** and Appendix *III – Noise Graphs* provide context to the ambient noise levels.

Generally, the measured noise levels presented in this report (and by extension past historical reporting) have been dominated and controlled by the ambient road traffic noise levels.

The historical graphs provided in **Section 1.2** illustrates peak-hour traffic in the morning and evening time periods, with consistent traffic throughout the day. The impact from any construction is judged to be at least 10 dB lower than the road traffic noise levels, as the levels have not conclusively changed over time.

The two (2) noise events identified as occurring on-site are all below NMLs once distance corrected.

None of the other measured noise events occurring throughout the month of August 2021 are judged to be a noise source originating from the construction works.

No noise exceedances occurred throughout the month of August 2021, thereby indicating adherence to the Lendlease Building Pty Ltd Tweed Valley Hospital – Management Plan – Noise and Vibration.

No further mitigation is required as the project is compliant against the noise management levels, and therefore the development consent conditions in which the project is approved under.

4 Conclusion

The projects' noise criteria are met at all times, and do not exceed the limitations outlined within the relevant documentation approved within the Development Consent (SSD-10353). The works are compliant against the relevant guidelines, policies, procedures, and standards relating to vibration on construction sites.



5 References

Relevant documents pertaining to the measurement of noise in Australia are provided below.


These documents provide guidance in which the measurement of construction noise, and the management of noise in New South Wales is undertaken.

- AS 1055:2018 Acoustics Description and measurement of environmental noise.
- AS 2107:2000 Acoustics Recommended design sound levels and reverberation times for building interiors.
- AS 2659.1-1998 Guide to the use of sound measuring equipment Portable sound level meters.
- Development Consent SSD-10353, Department of Planning, Industry and Environment Tweed Valley Hospital Stage 2 – 12 July 2020 (approval).
- Interim Construction Noise Guideline (ICNG, DECC 2009).
- Noise Policy for Industry (NPfI, EPA 2017).
- Sydney Metro Construction Noise and Vibration Standard (v4.1, 2020).
- Transport for New South Wales Construction Noise and Vibration Strategy (TfNSW, 2019).
- Tweed Valley Hospital Management Plan Noise and Vibration, Revision 7.0, Lendlease Building Pty Ltd.
- Tweed Valley Hospital Noise and Vibration Impact Assessment for State Significant Development (SSD), SVM-2370, Revision: Issue 2, 17 October 2018 Acoustic Studio.



Appendix I – Aerial Photograph



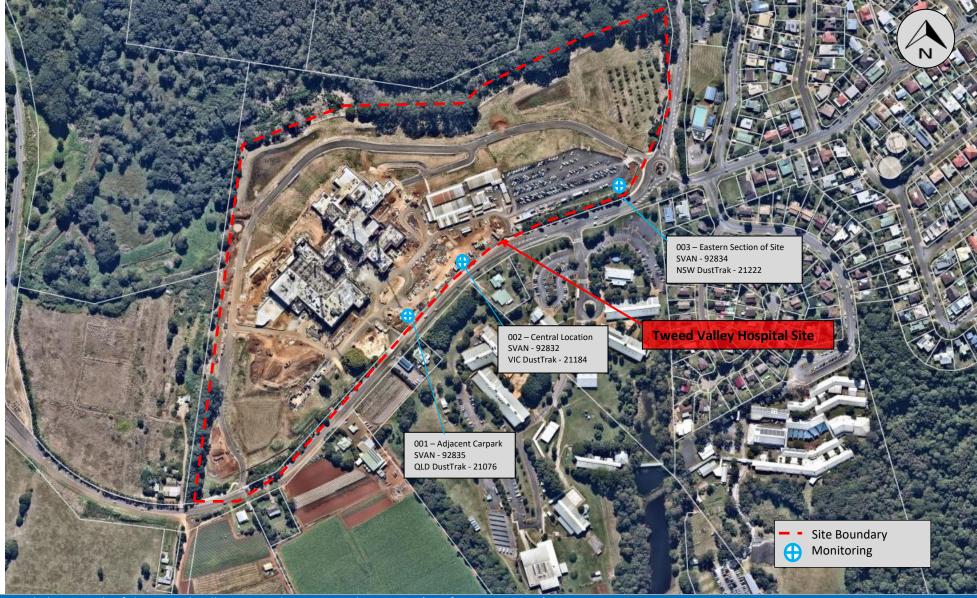

Aerial photograph of the Tweed Valley Hospital Project, Cudgen, NSW (as of 5 August 2021).



Appendix II – Monitoring Locations





Photograph 1 Representative photograph of monitoring location 001 – Adjacent Carpark location, as observed 19/08/2021

Environmental Noise Assessment Report Tweed Valley Hospital Project, Cudgen NSW





Photograph 2 Representative photograph of monitoring location 002 – Central location, as observed 19/08/2021

Environmental Noise Assessment Report Tweed Valley Hospital Project, Cudgen NSW








Photograph 3 Representative photograph of monitoring location 003 – Eastern Section of Site, as observed 19/08/2021





Appendix III – Noise Graphs

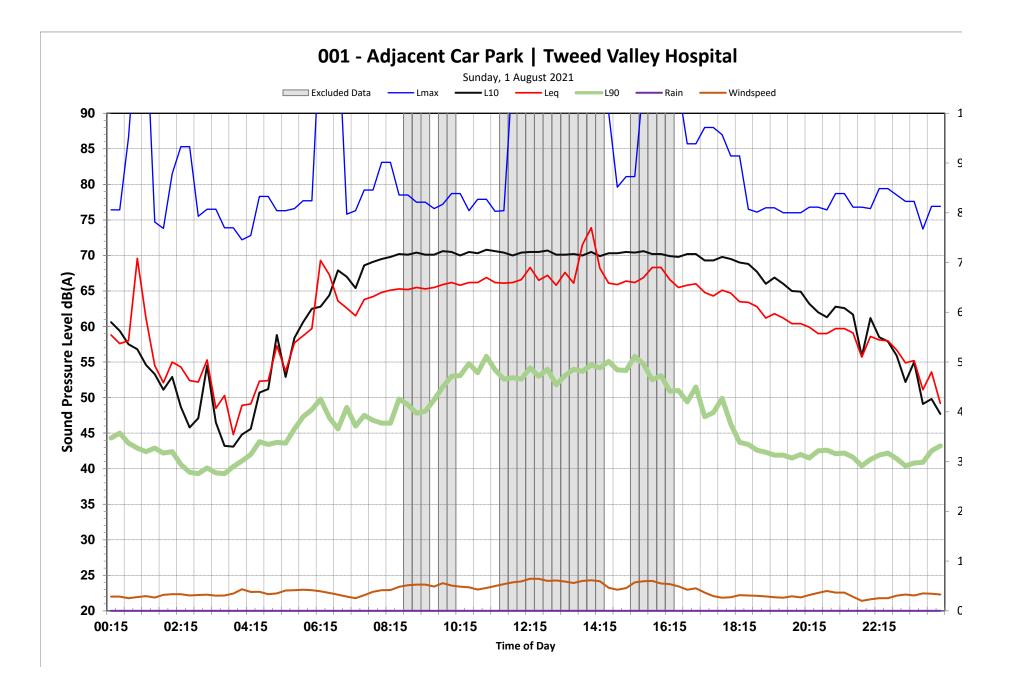


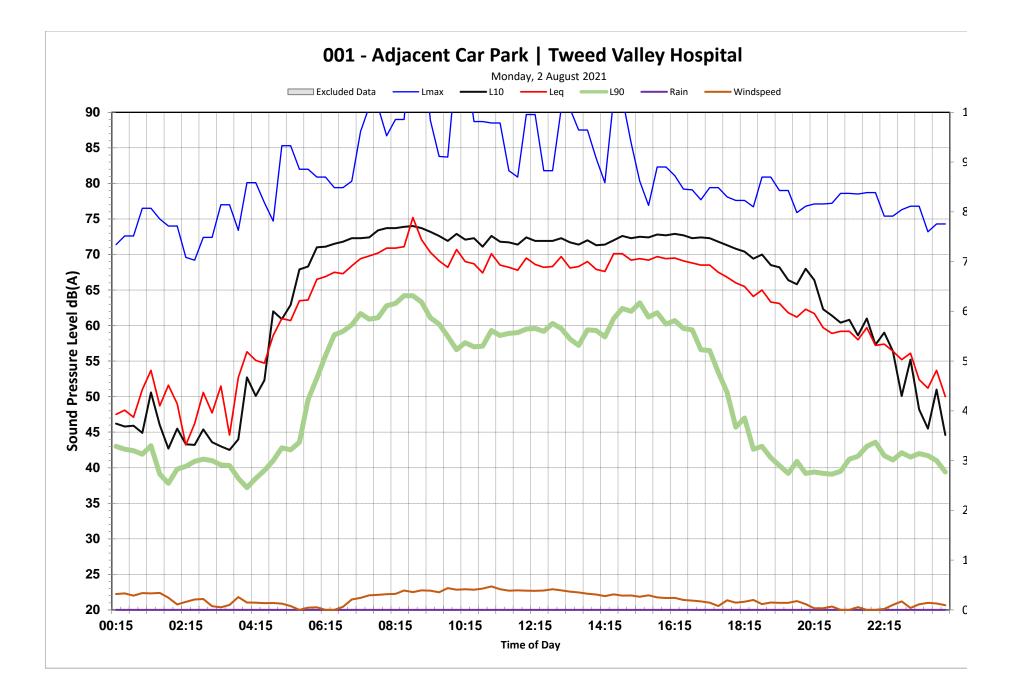


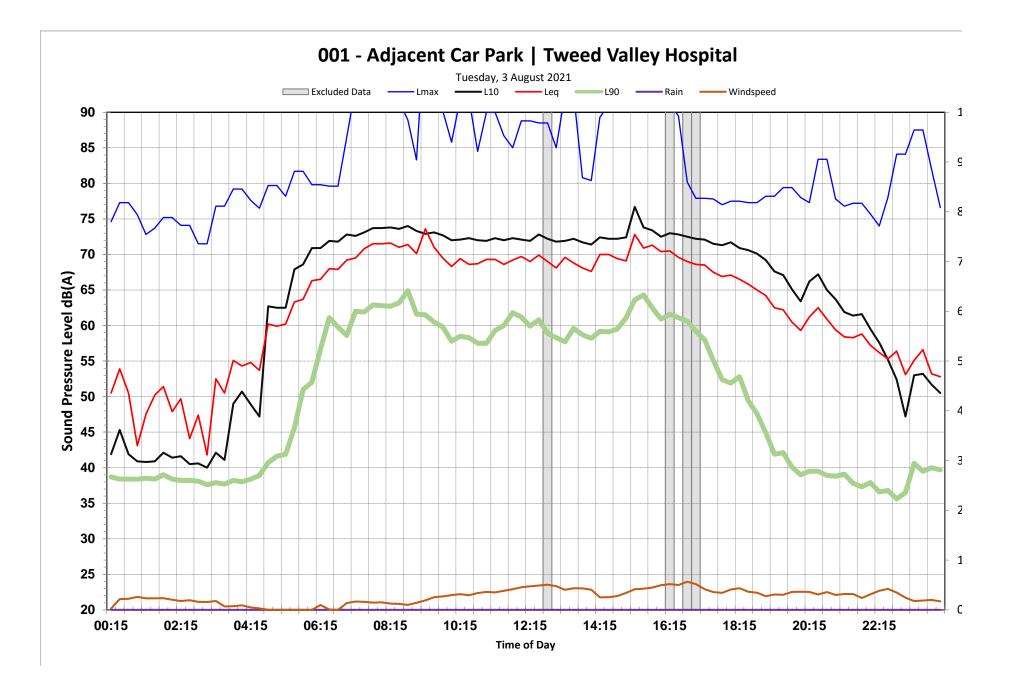


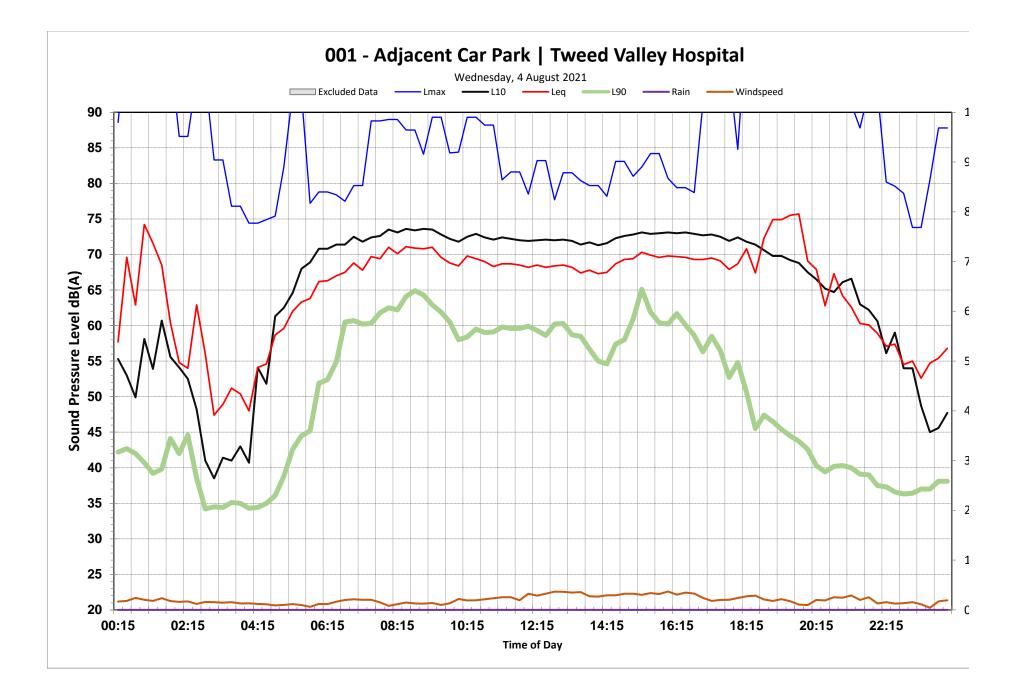


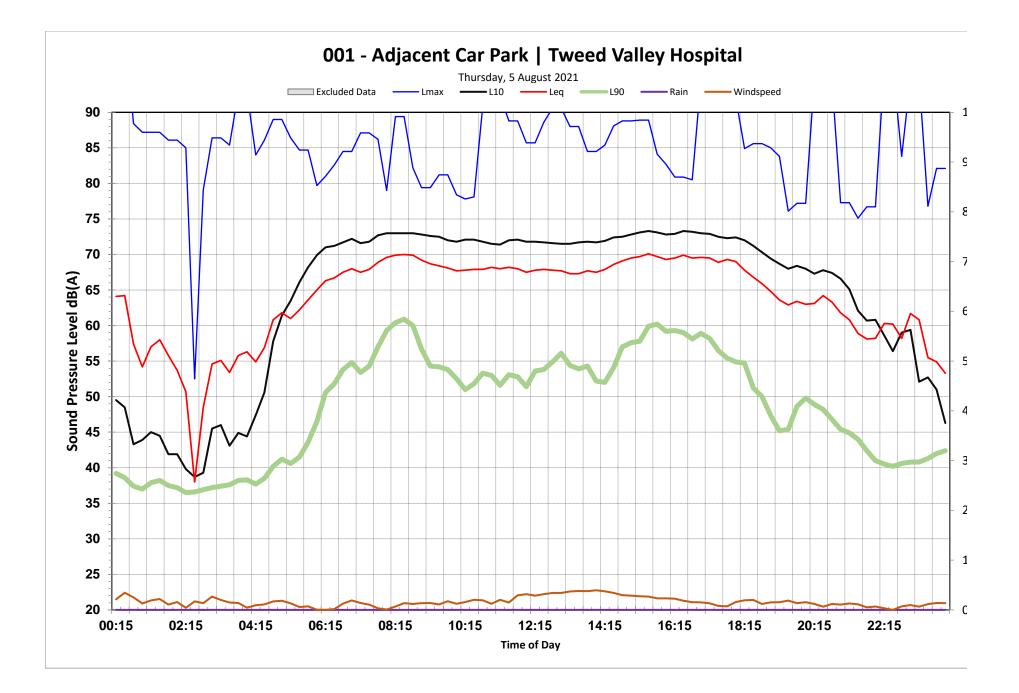


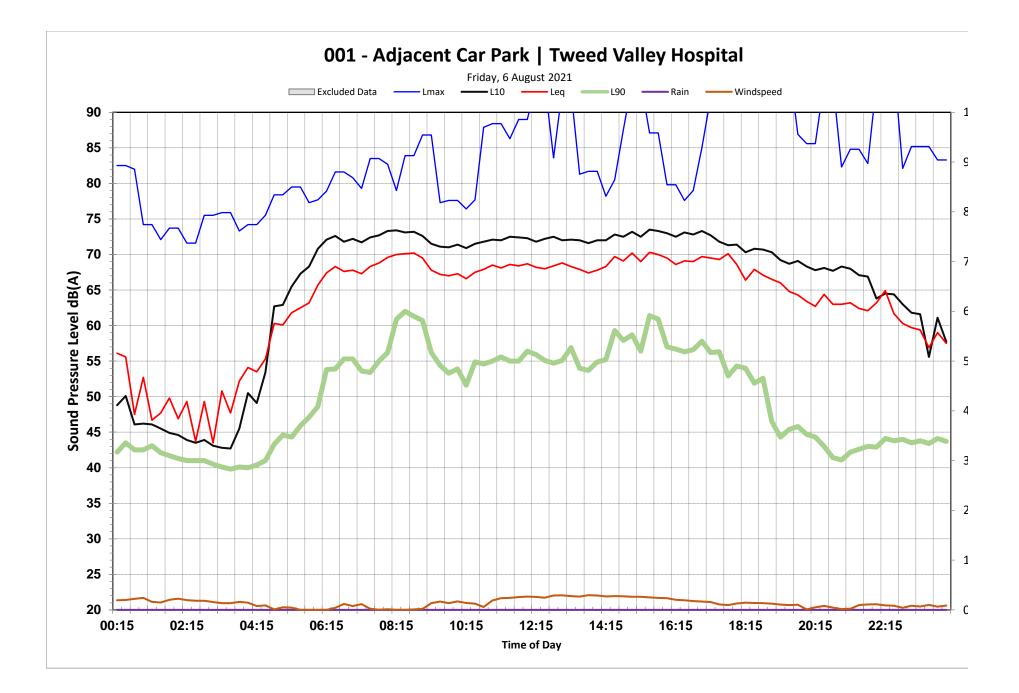


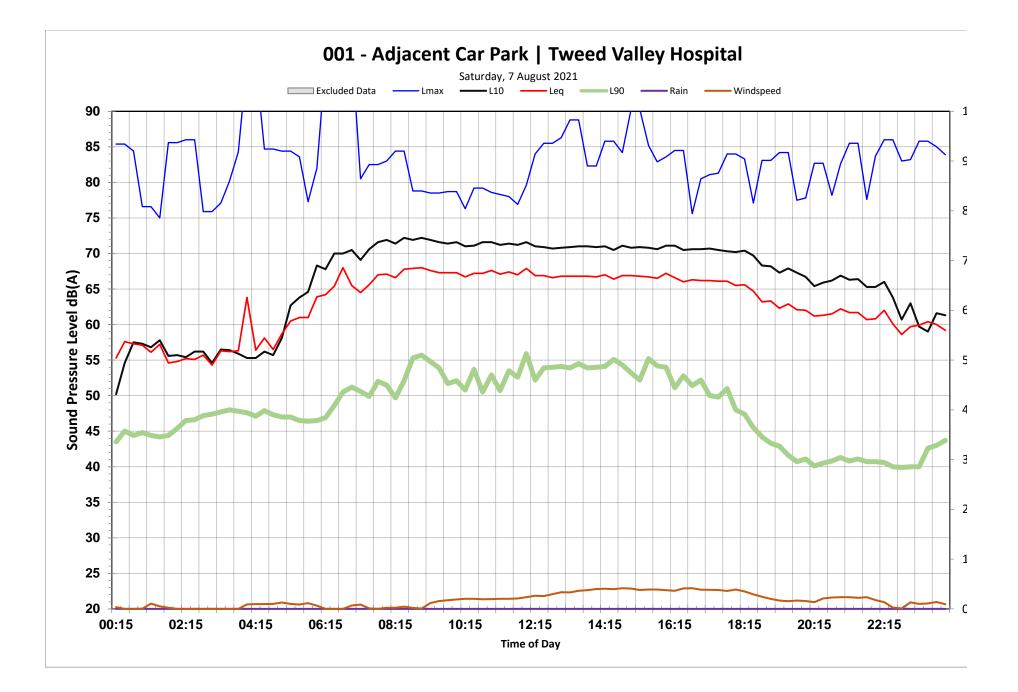


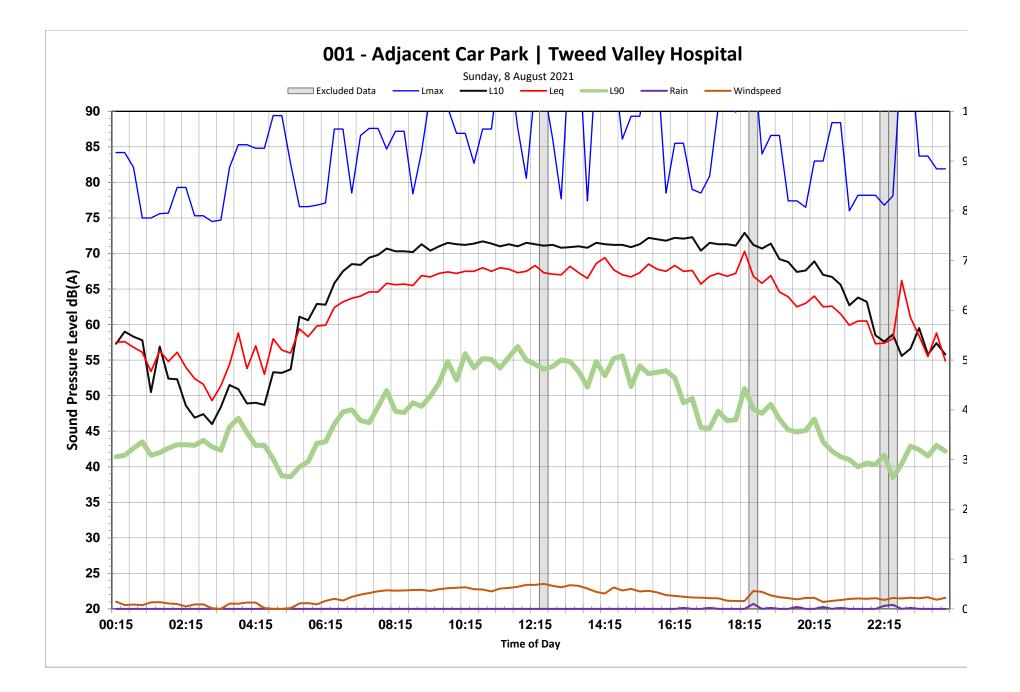


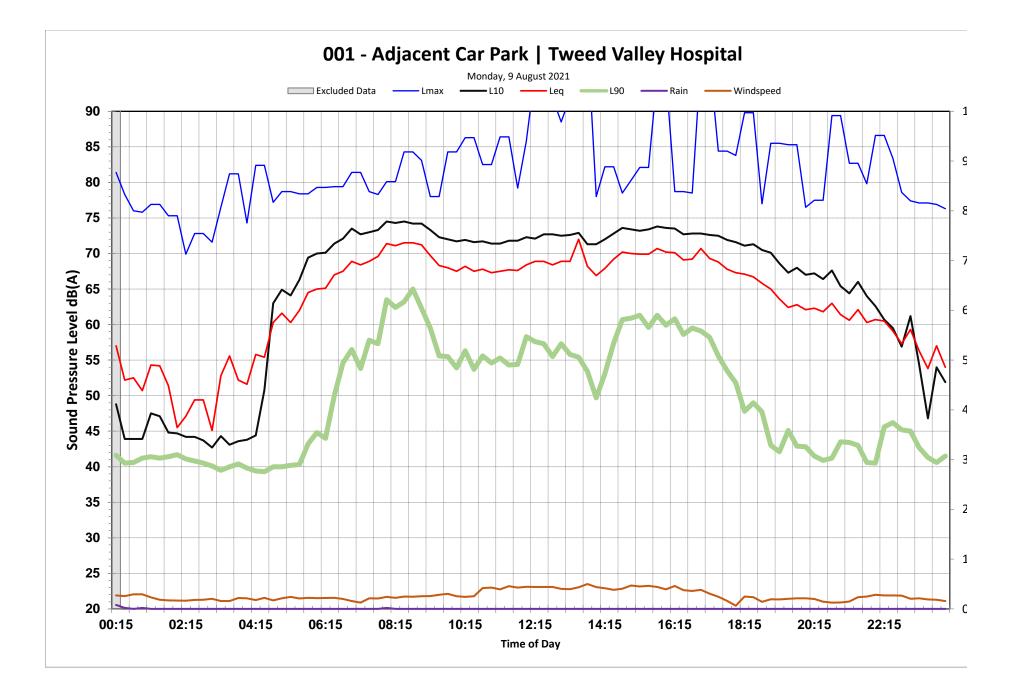


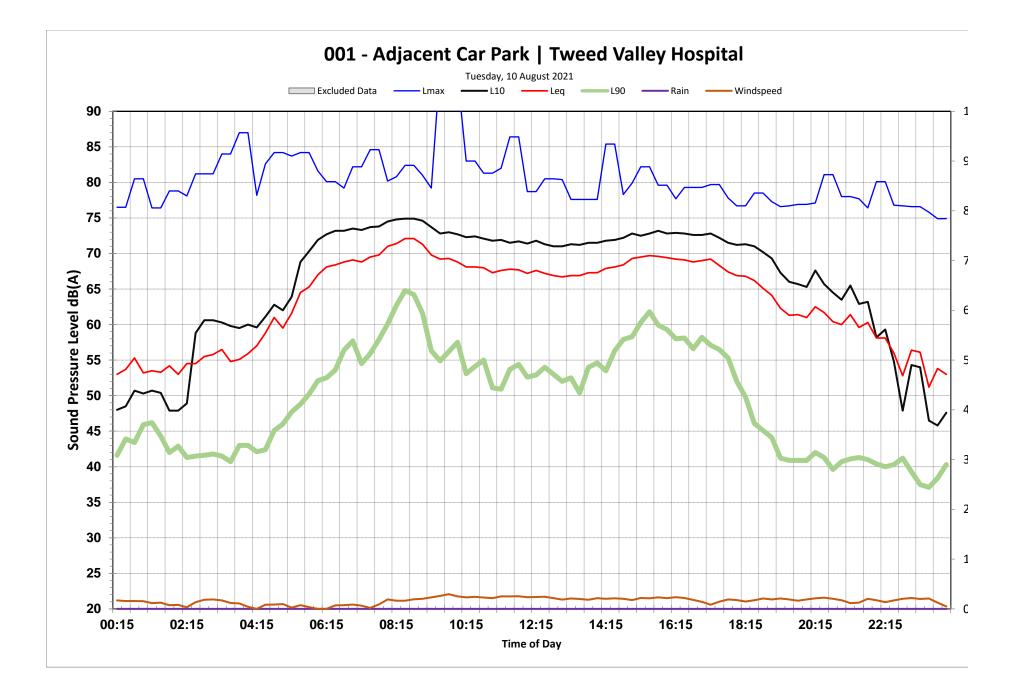


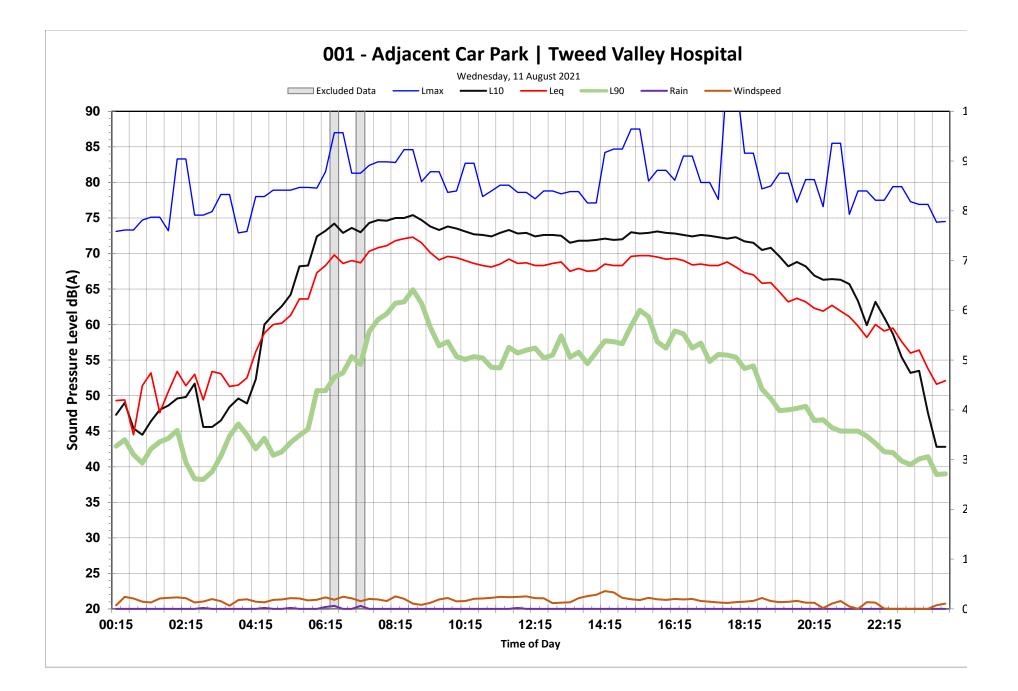


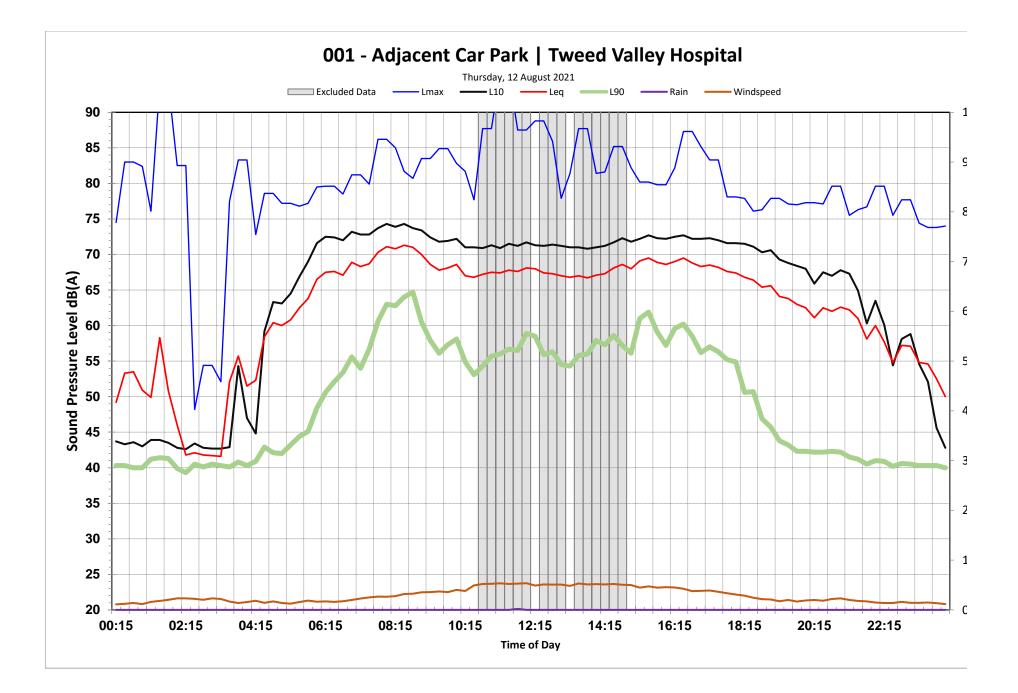


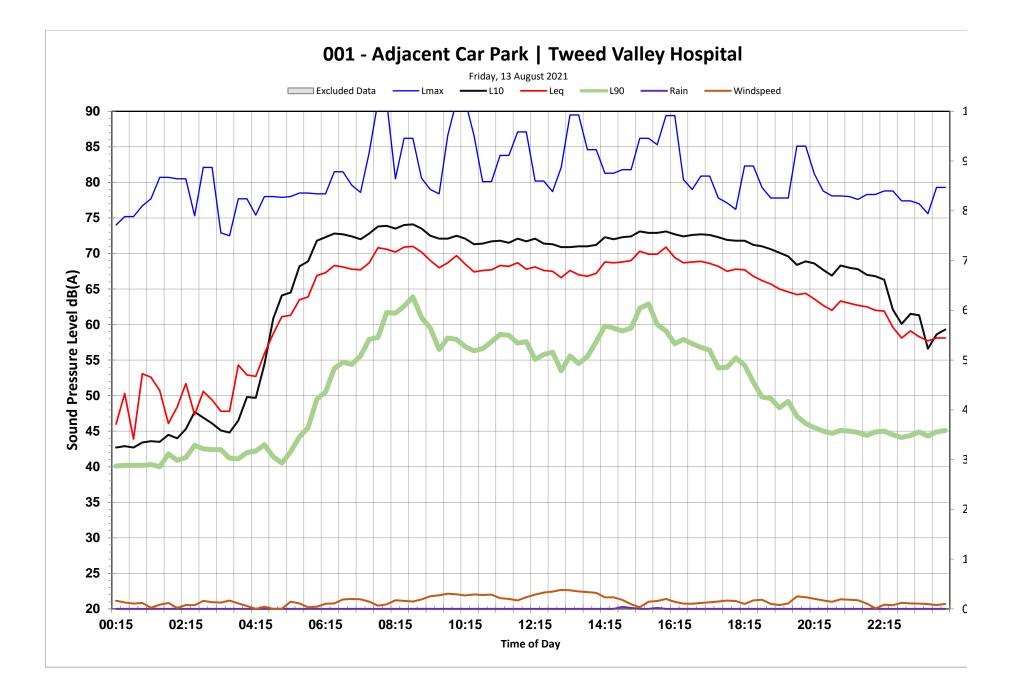


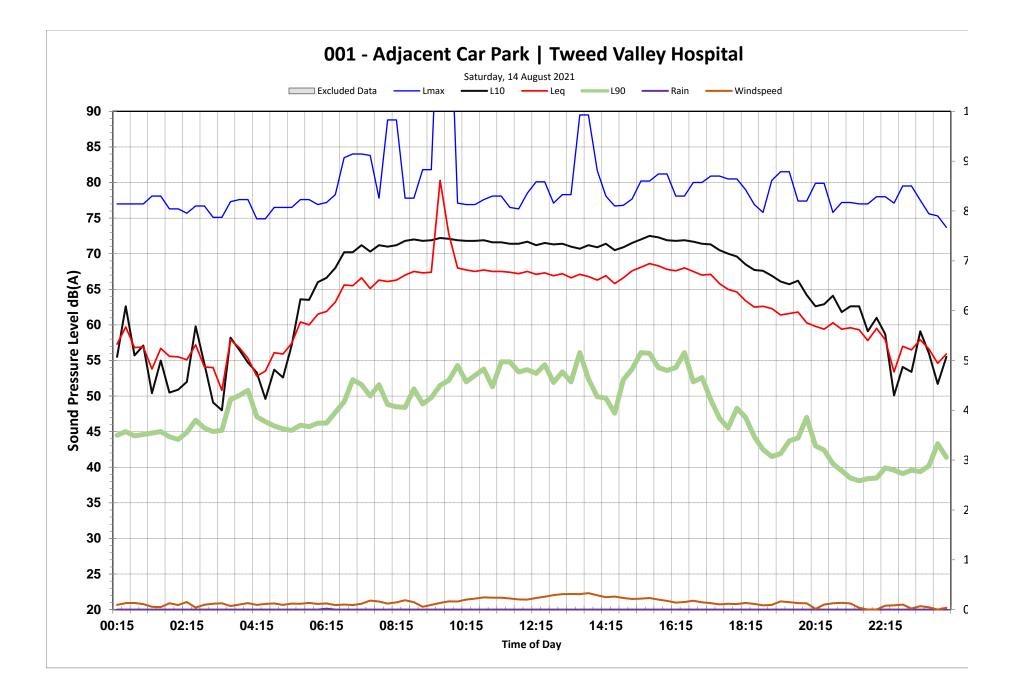


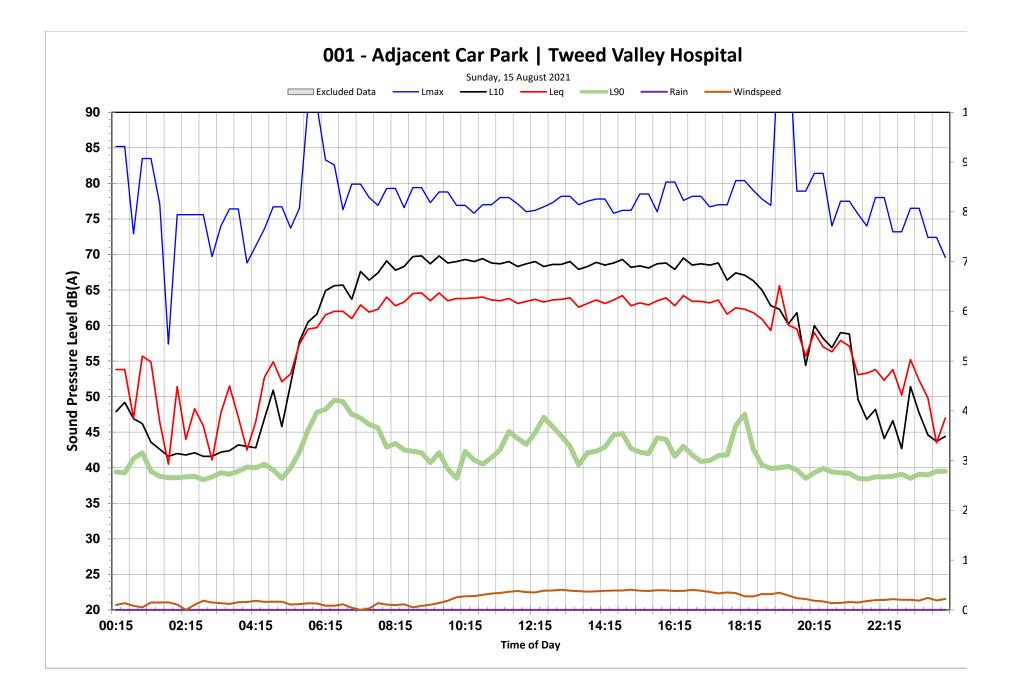


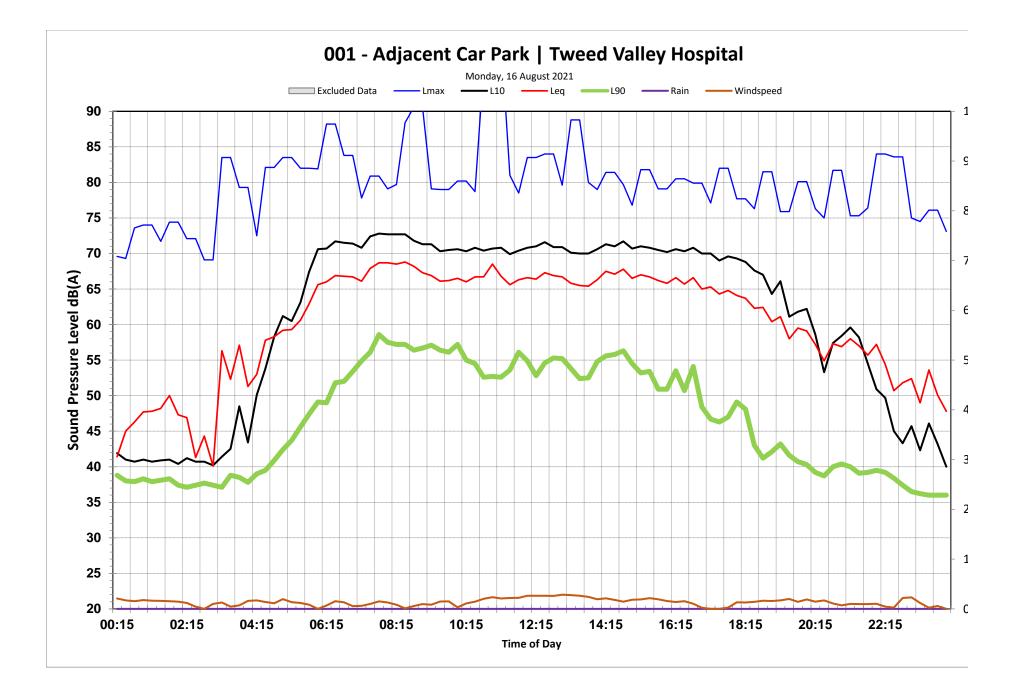


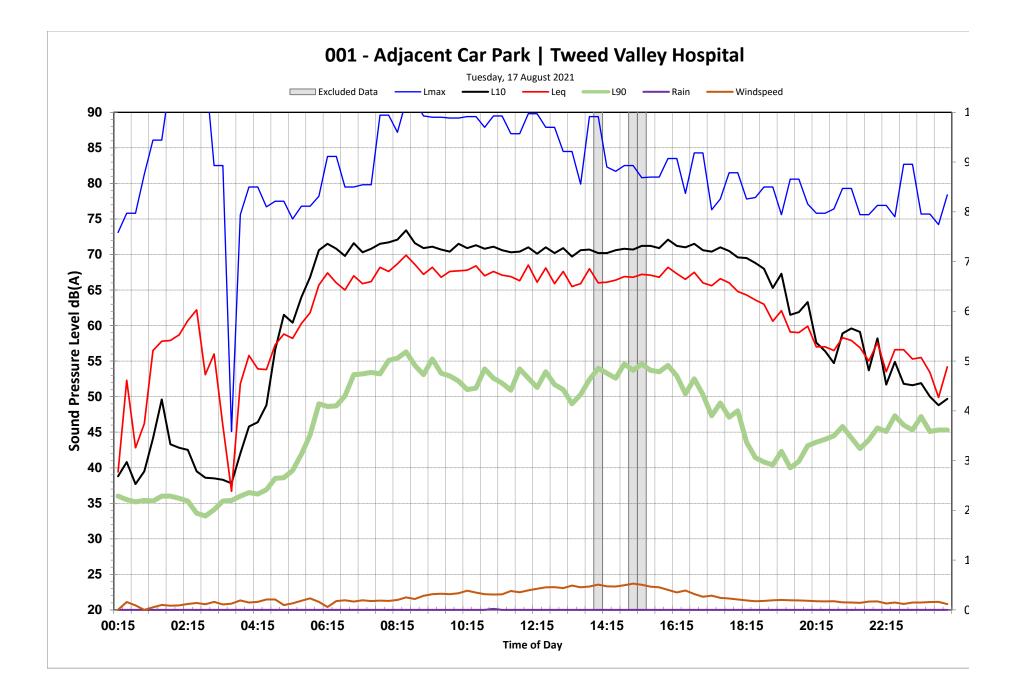


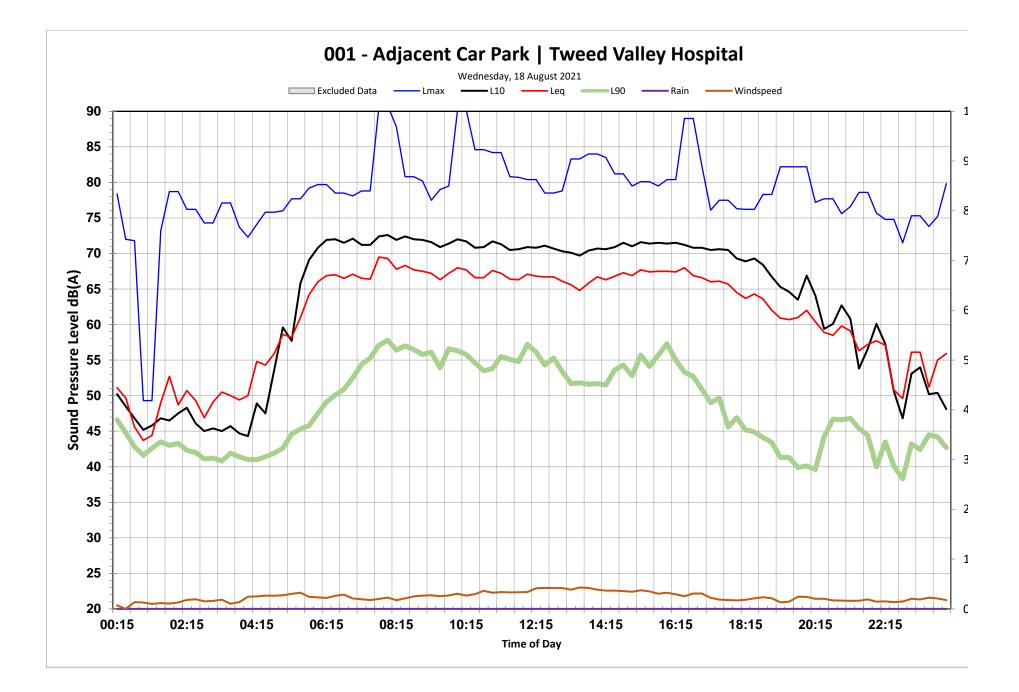


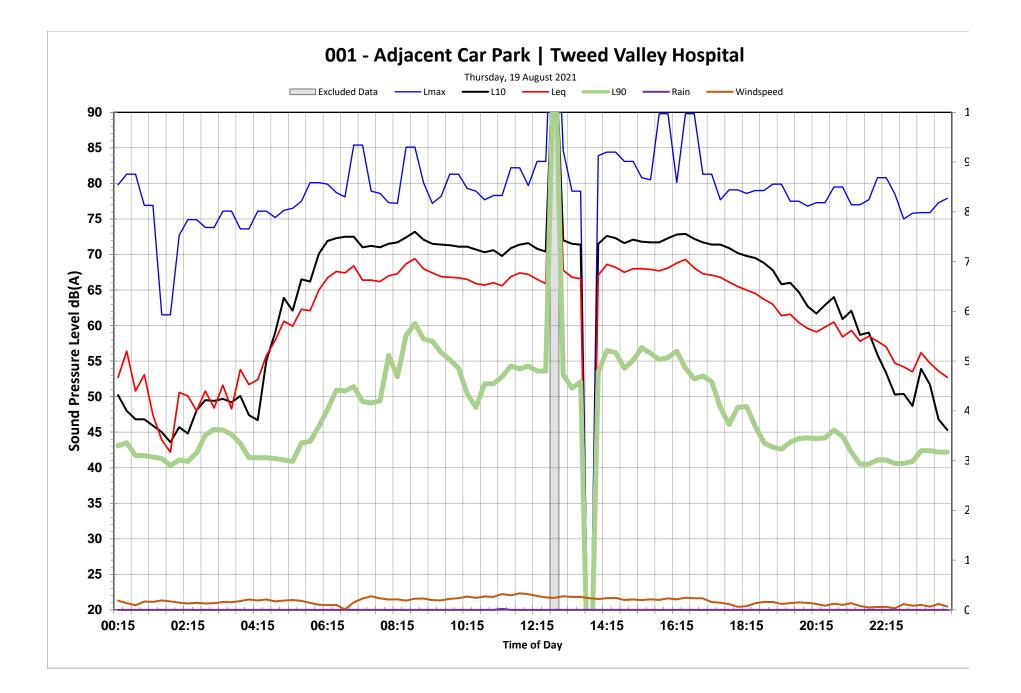


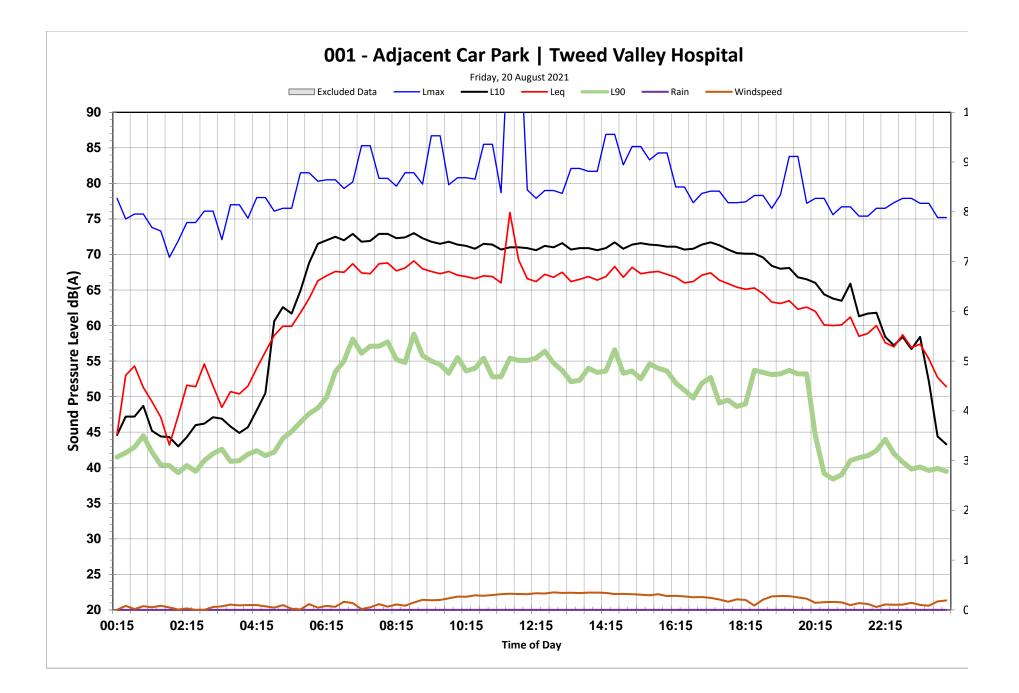


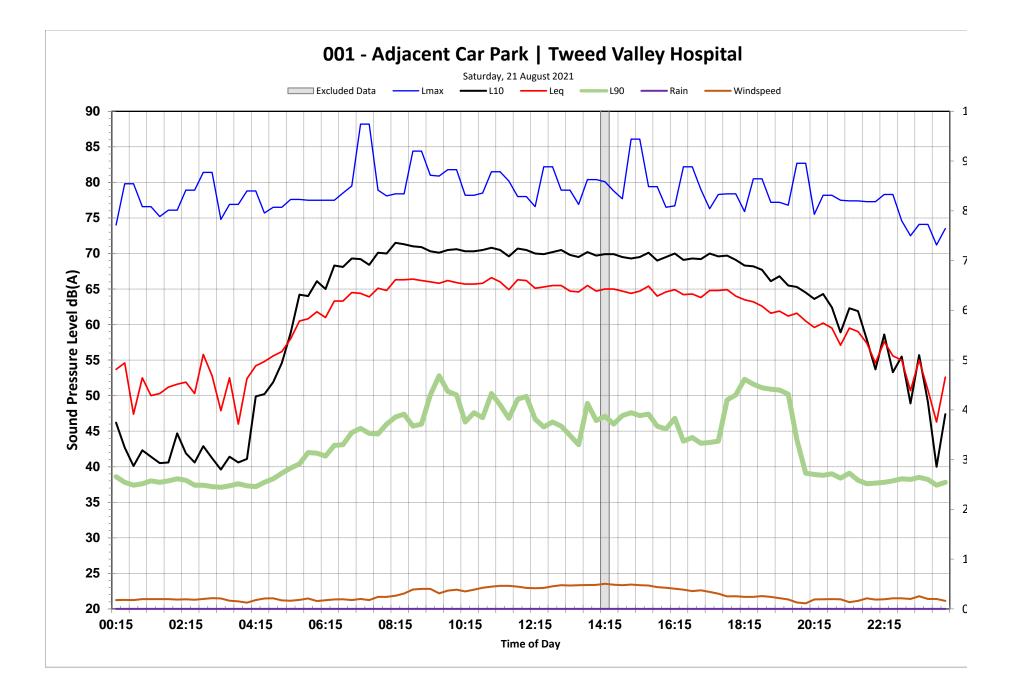


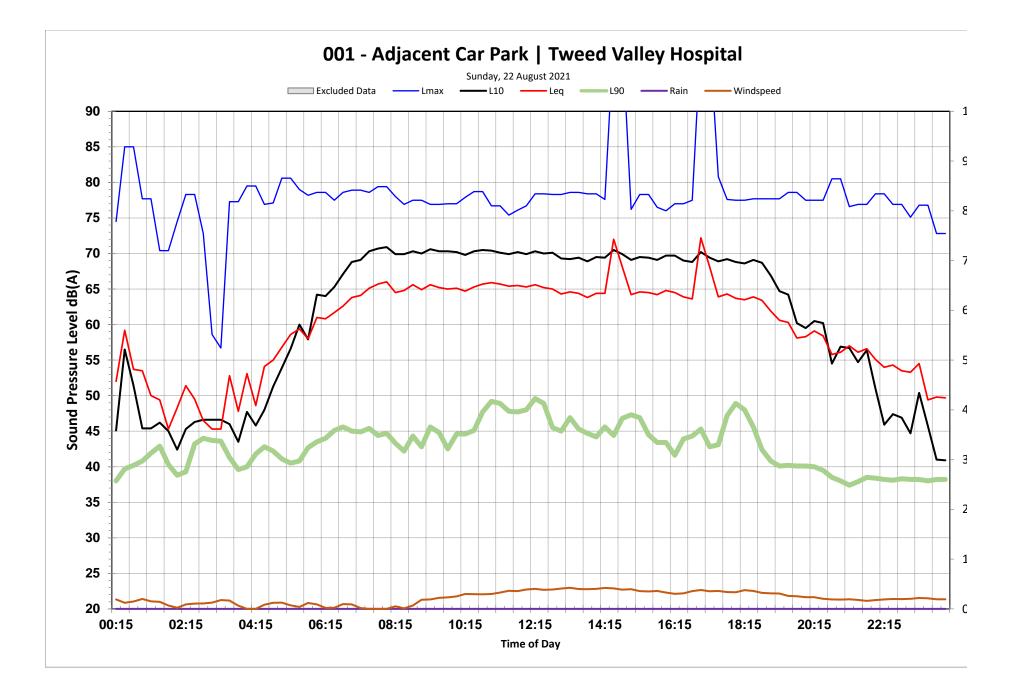


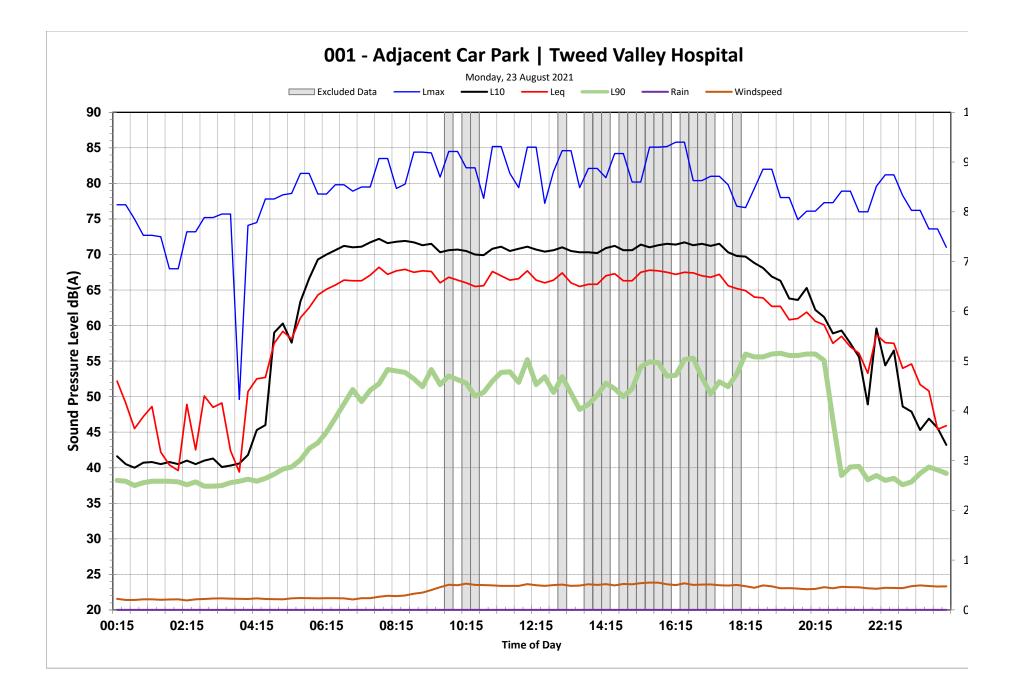


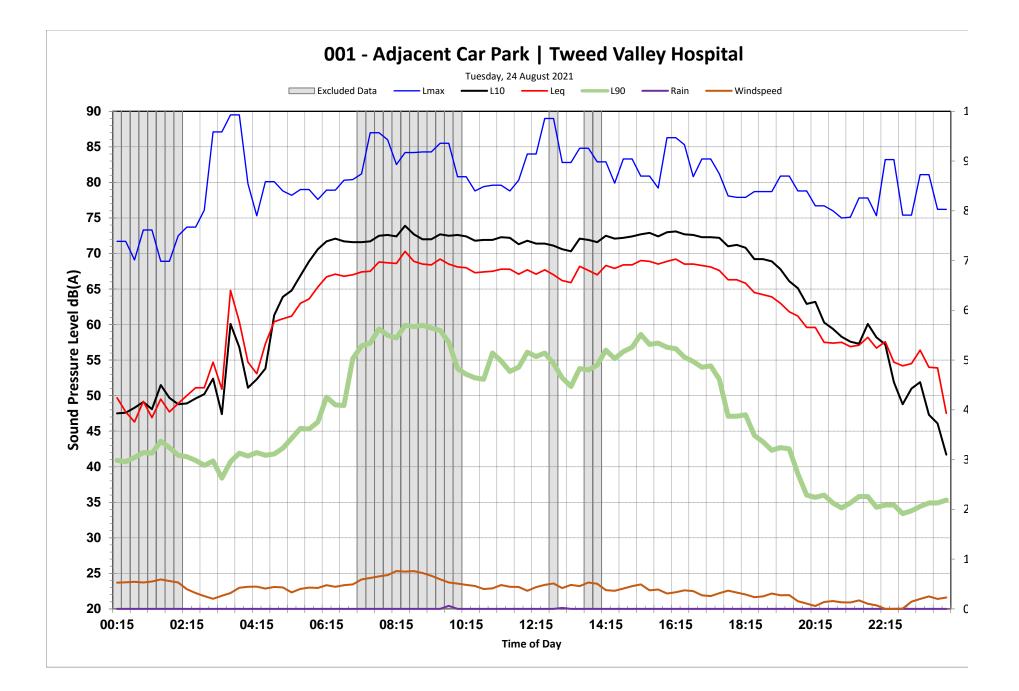


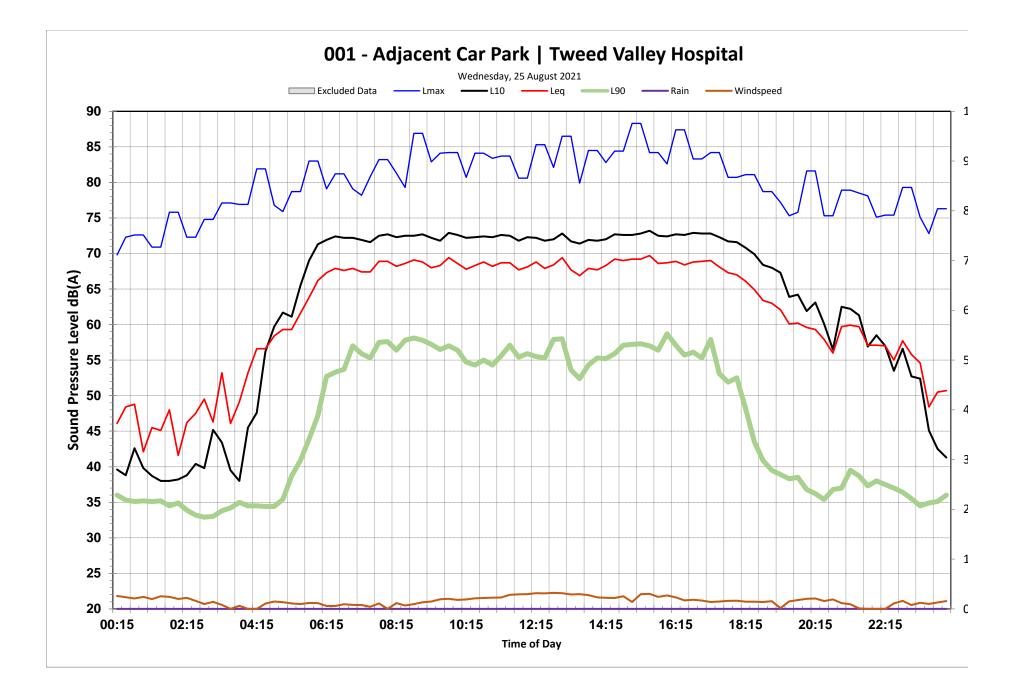


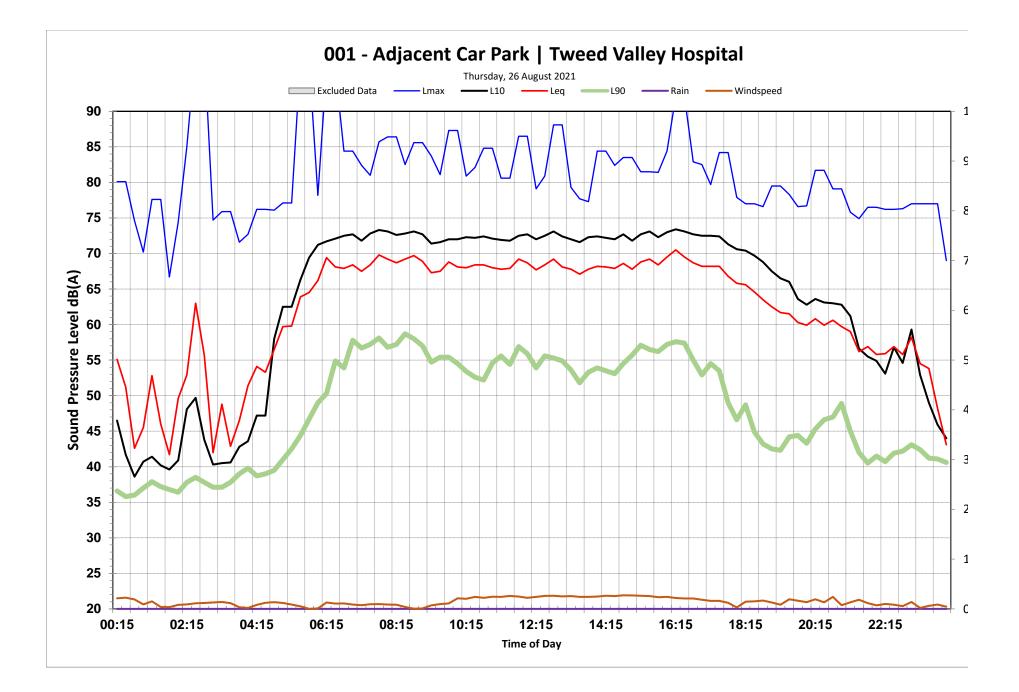


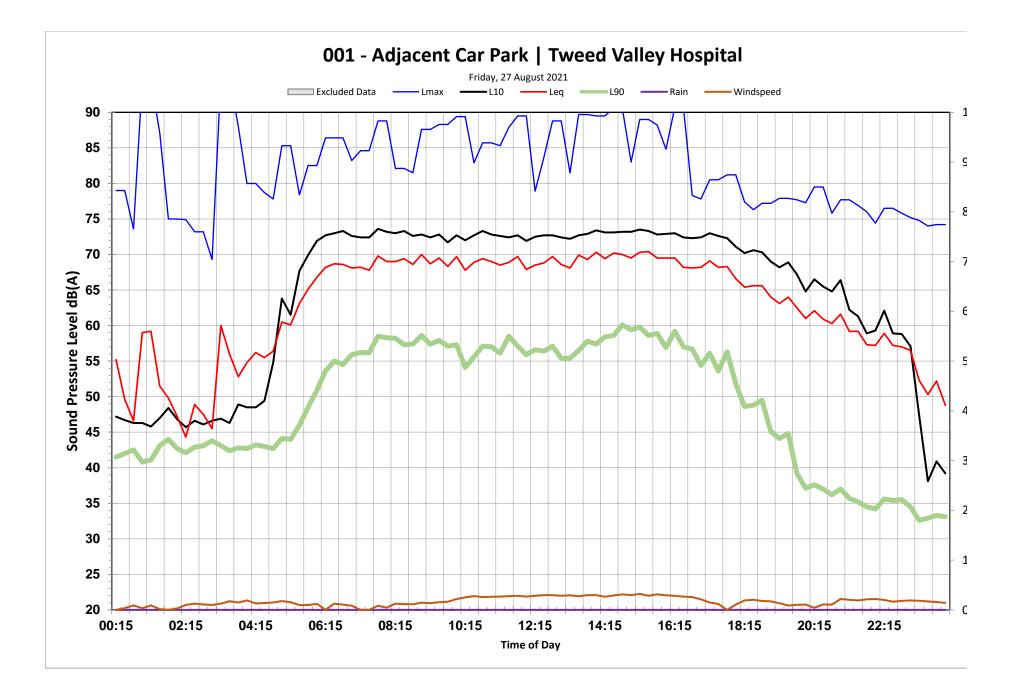


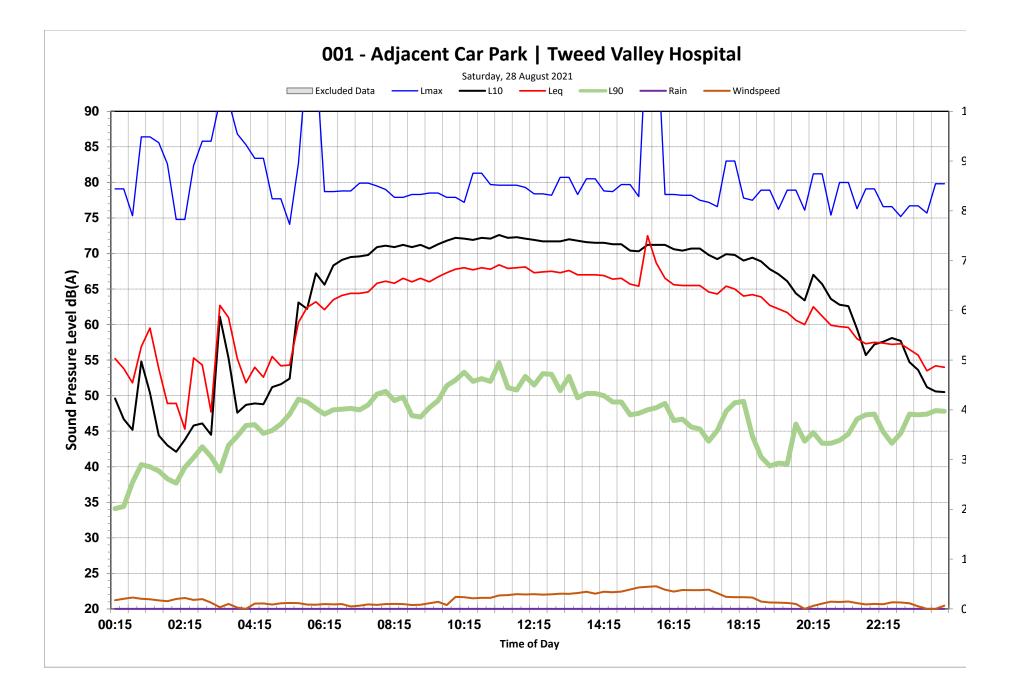


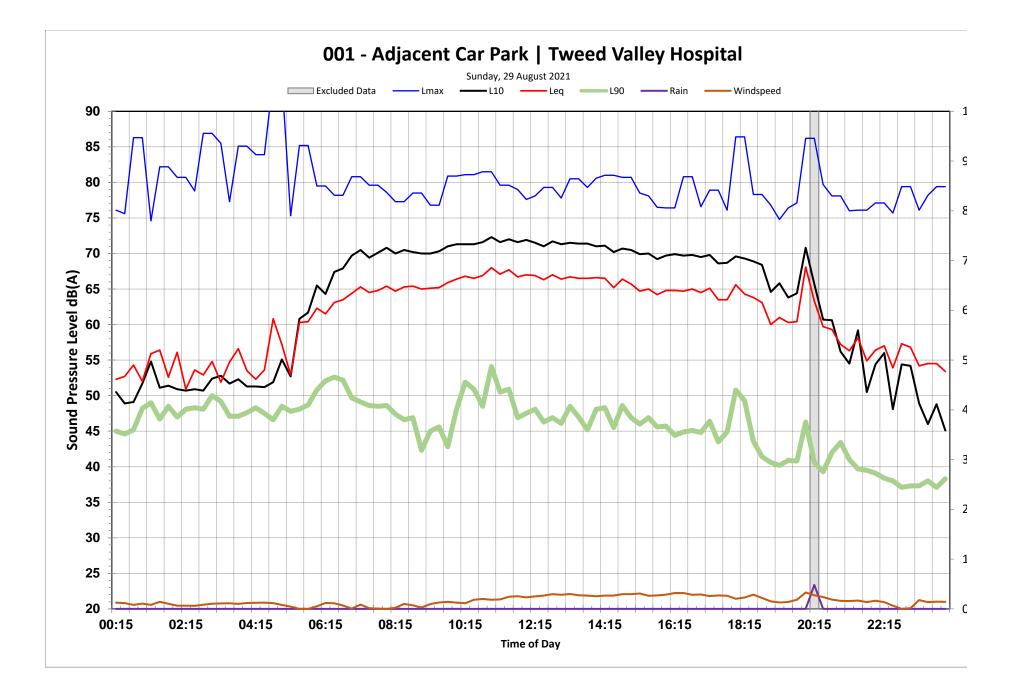


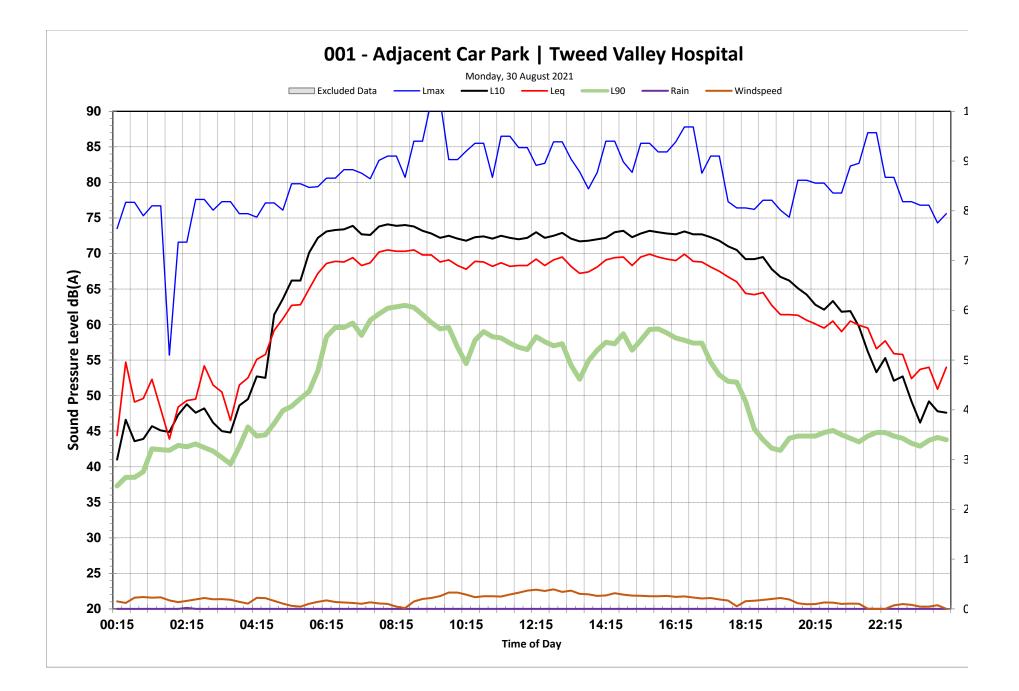


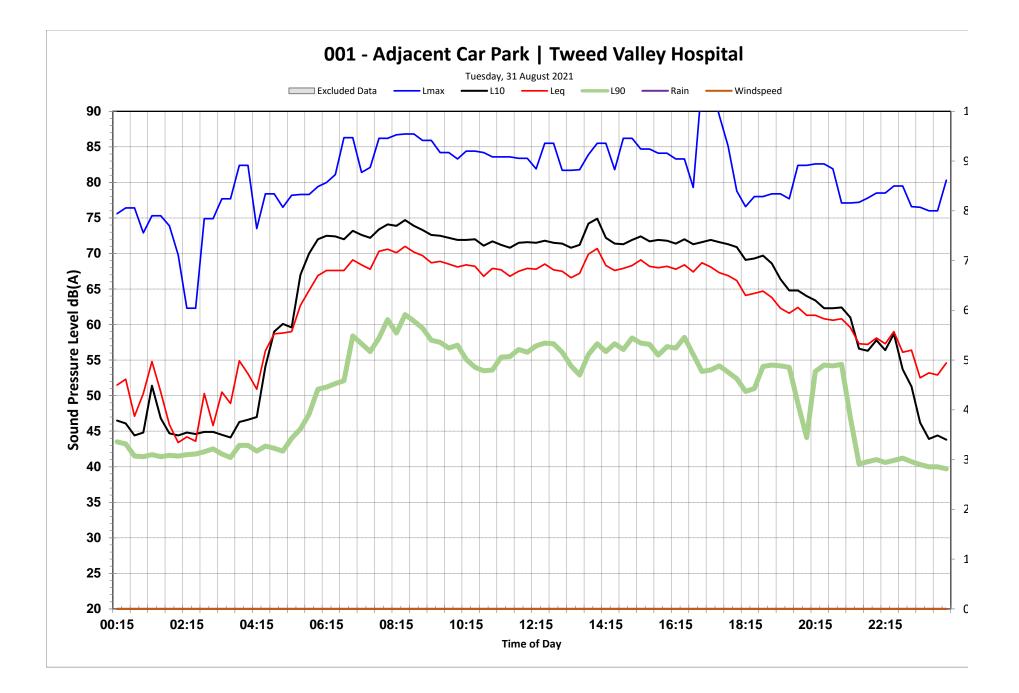


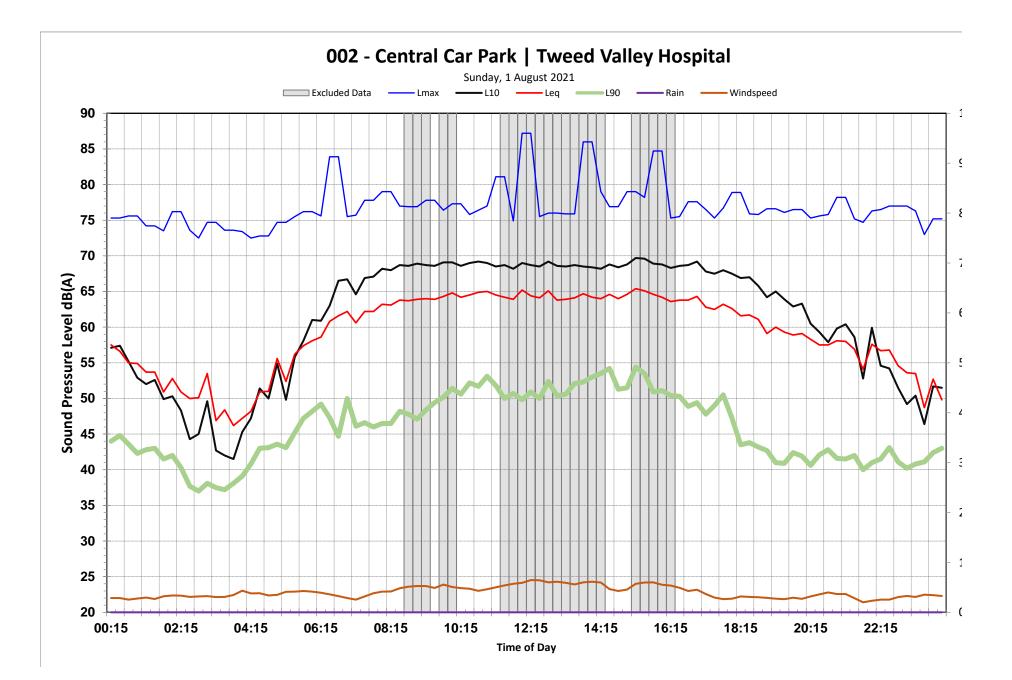


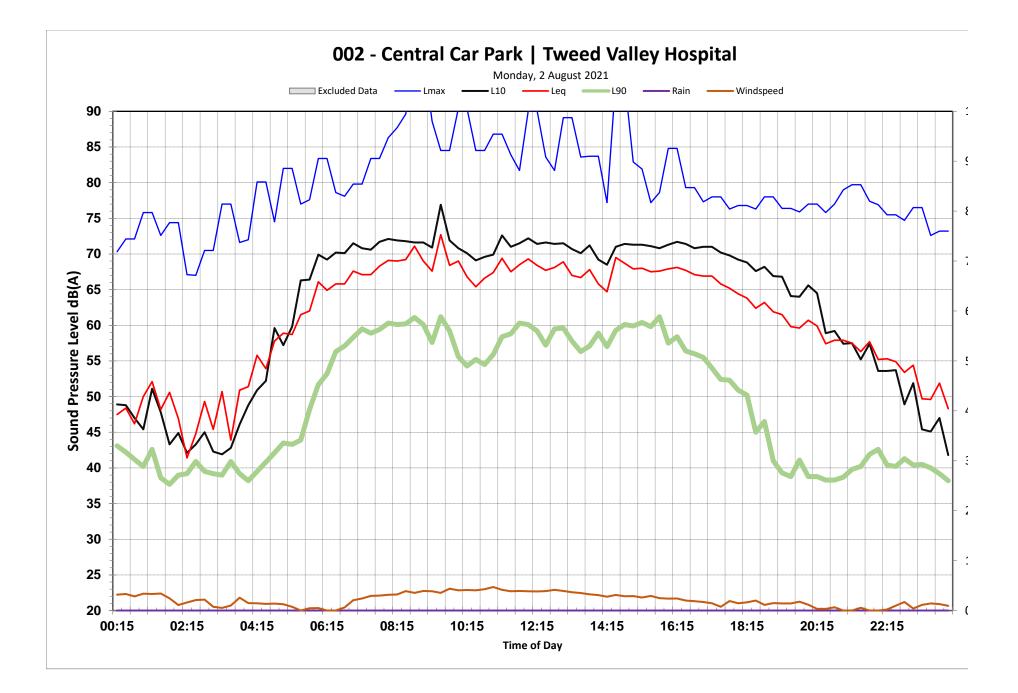


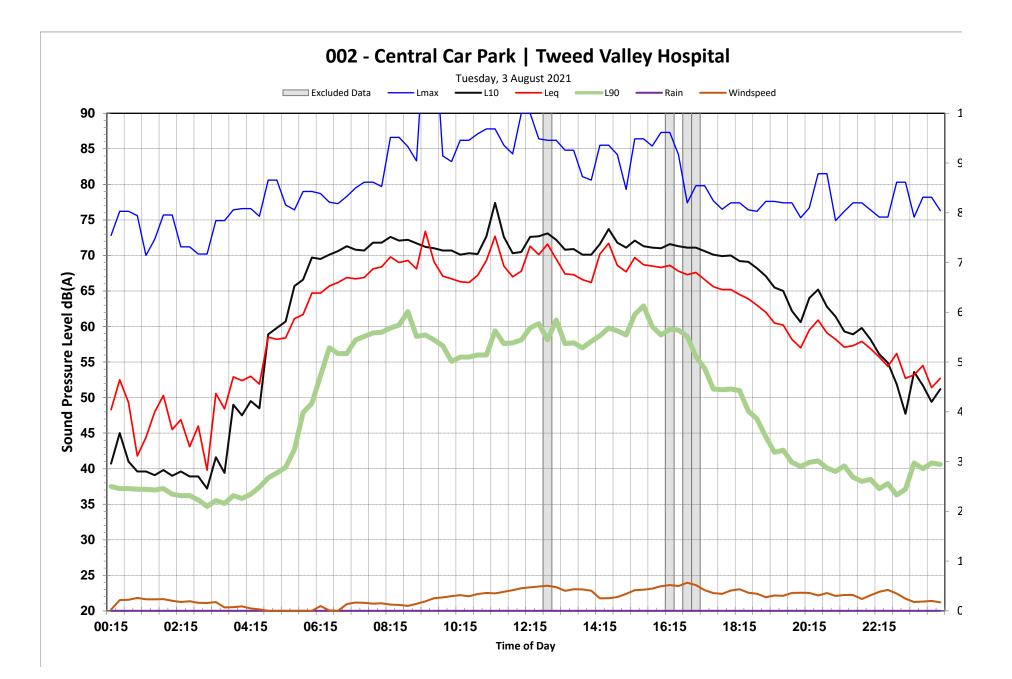


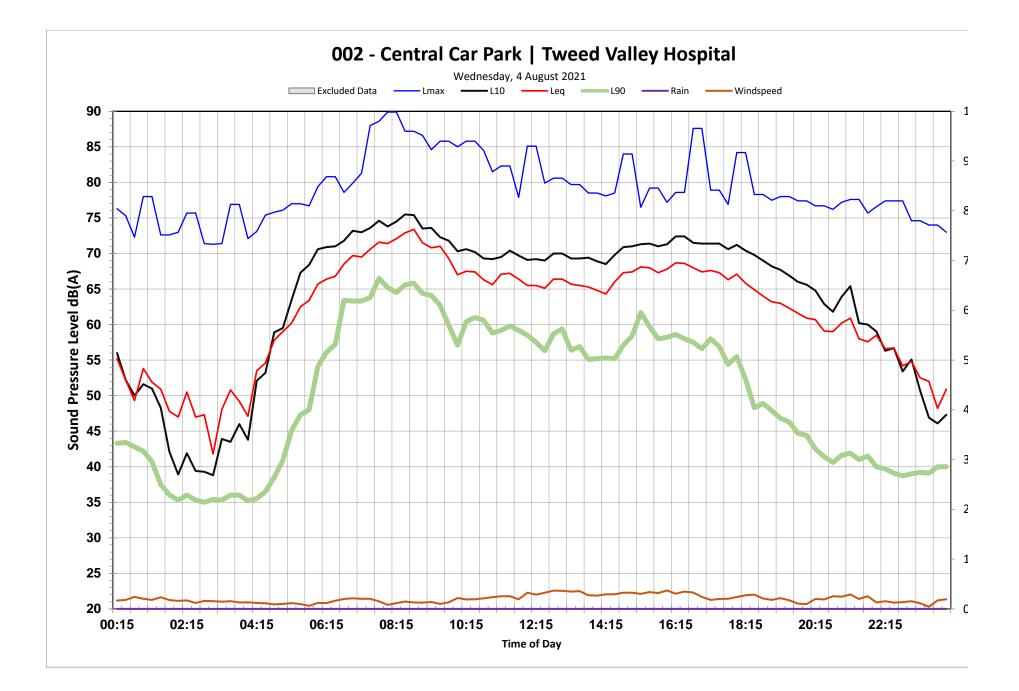


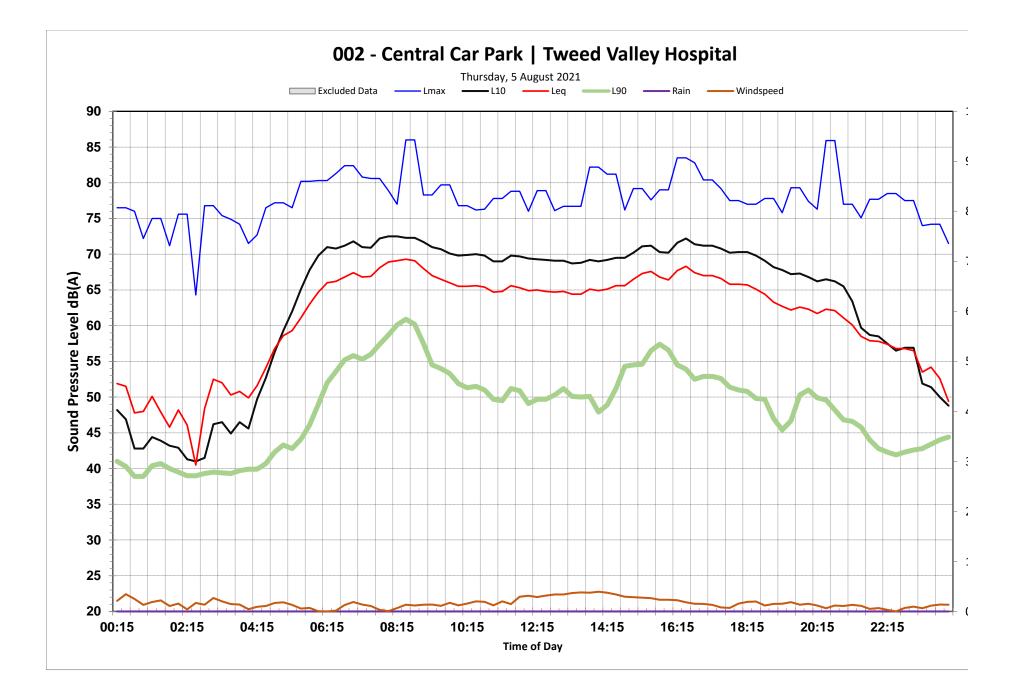


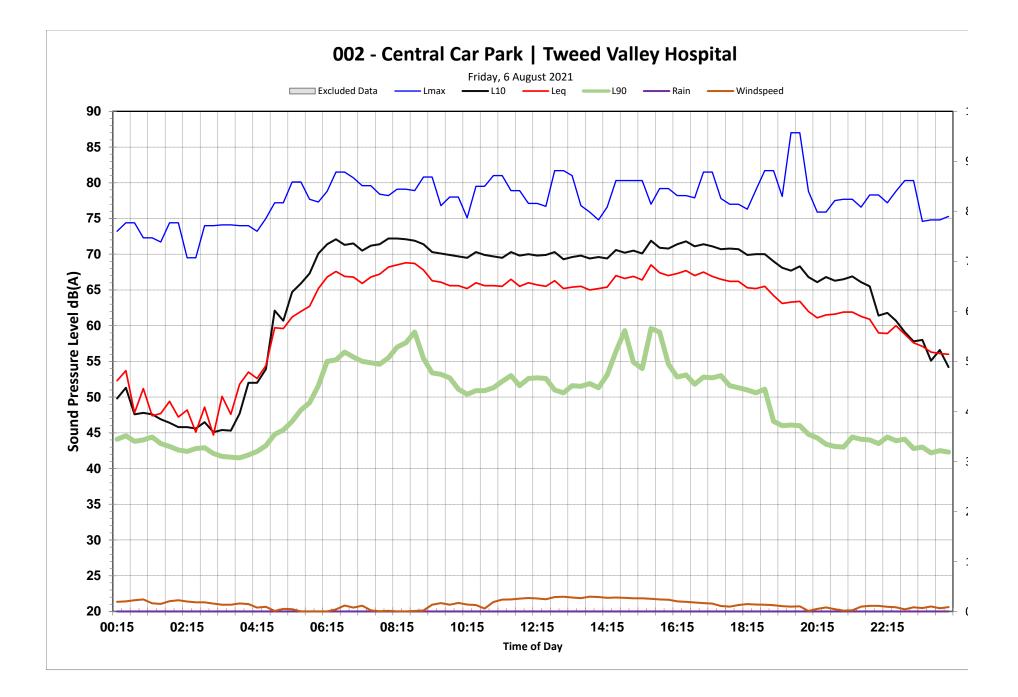


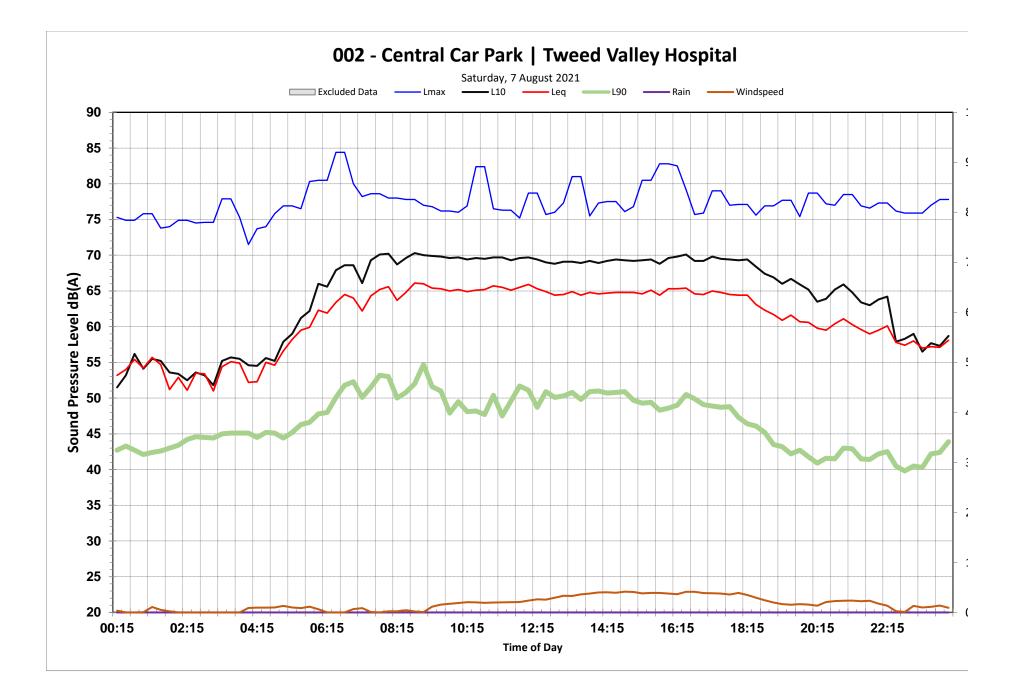


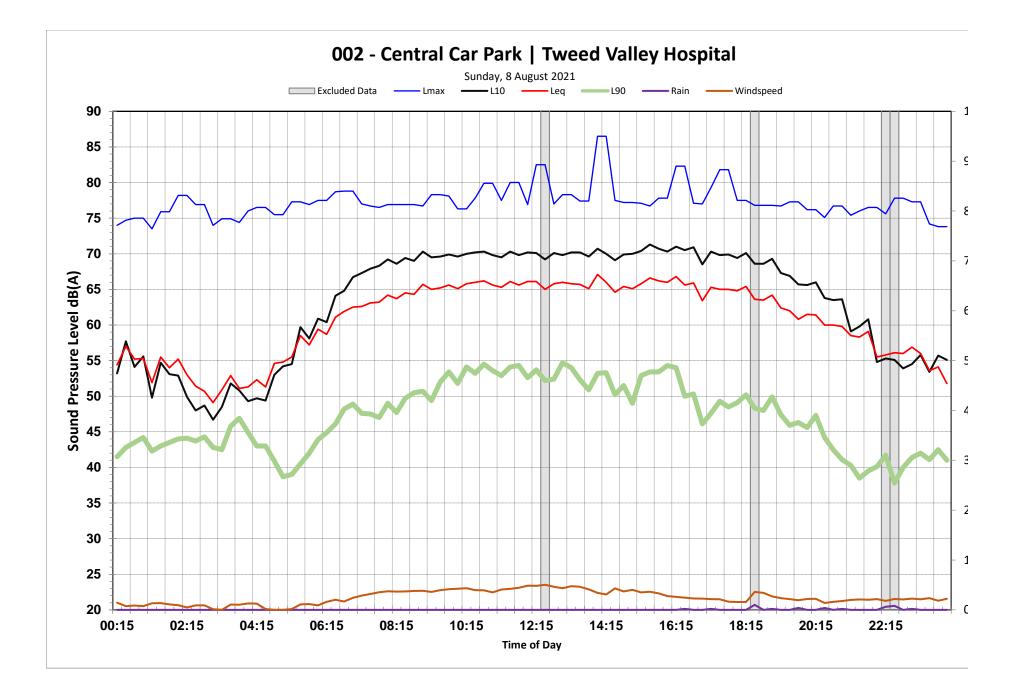


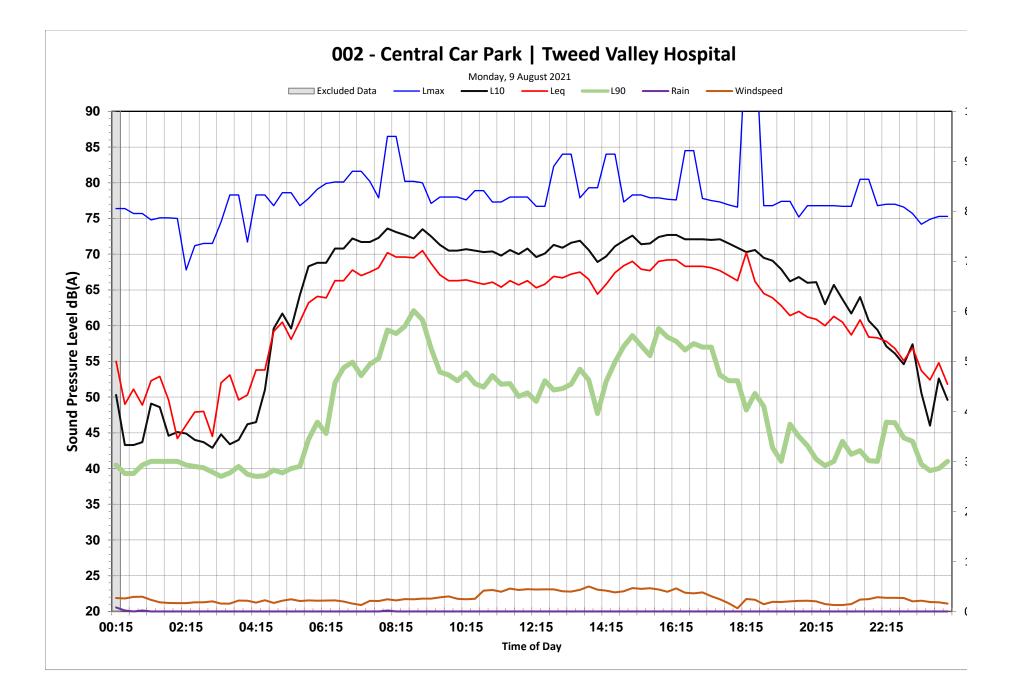


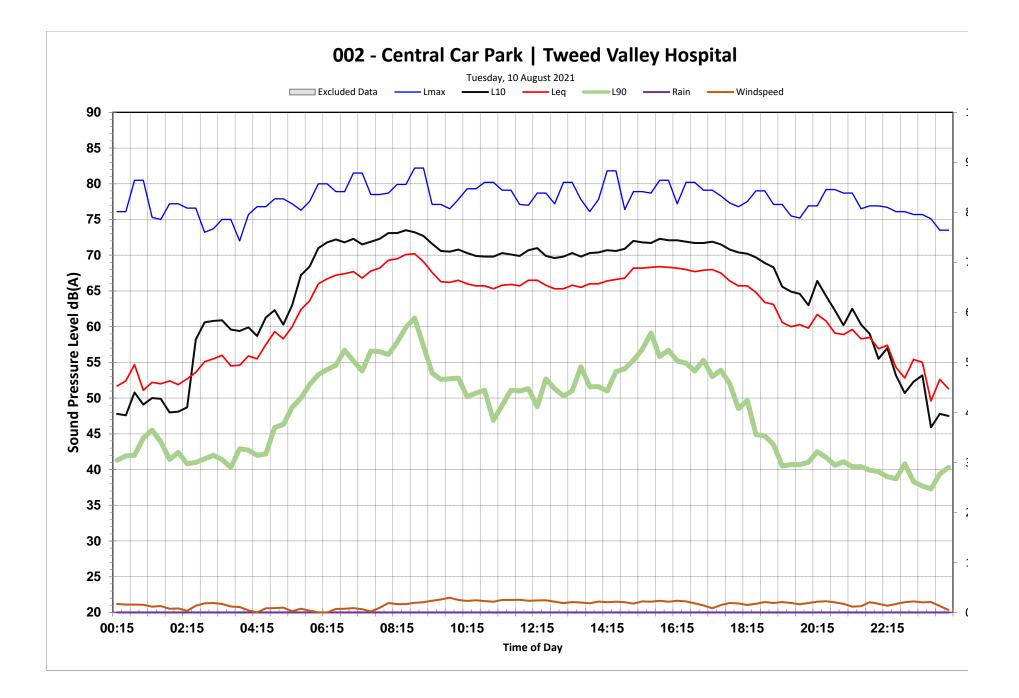


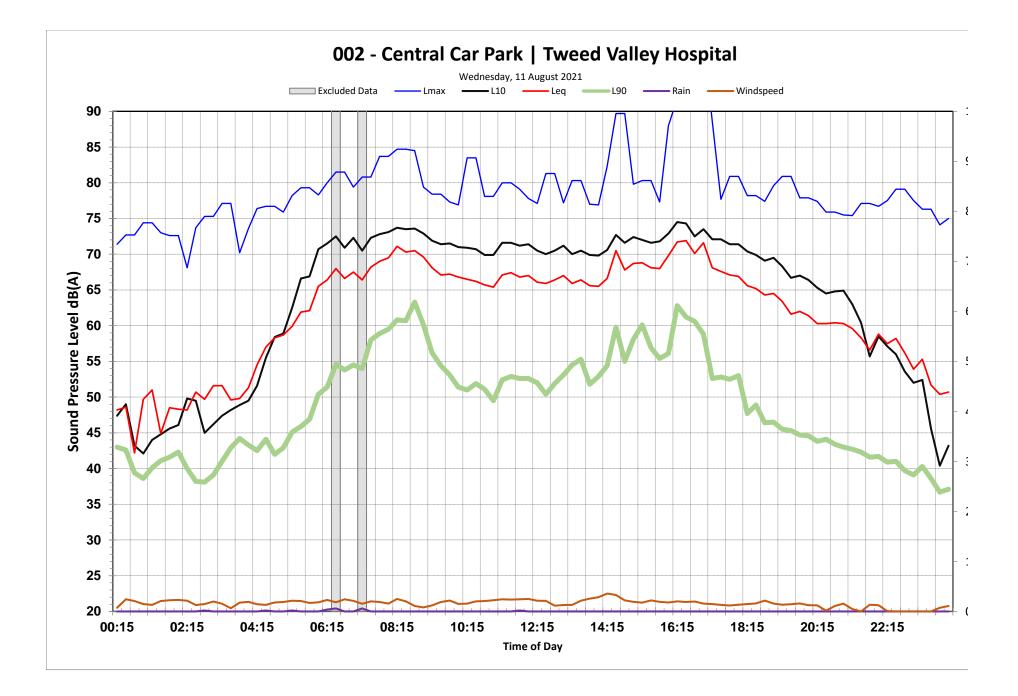


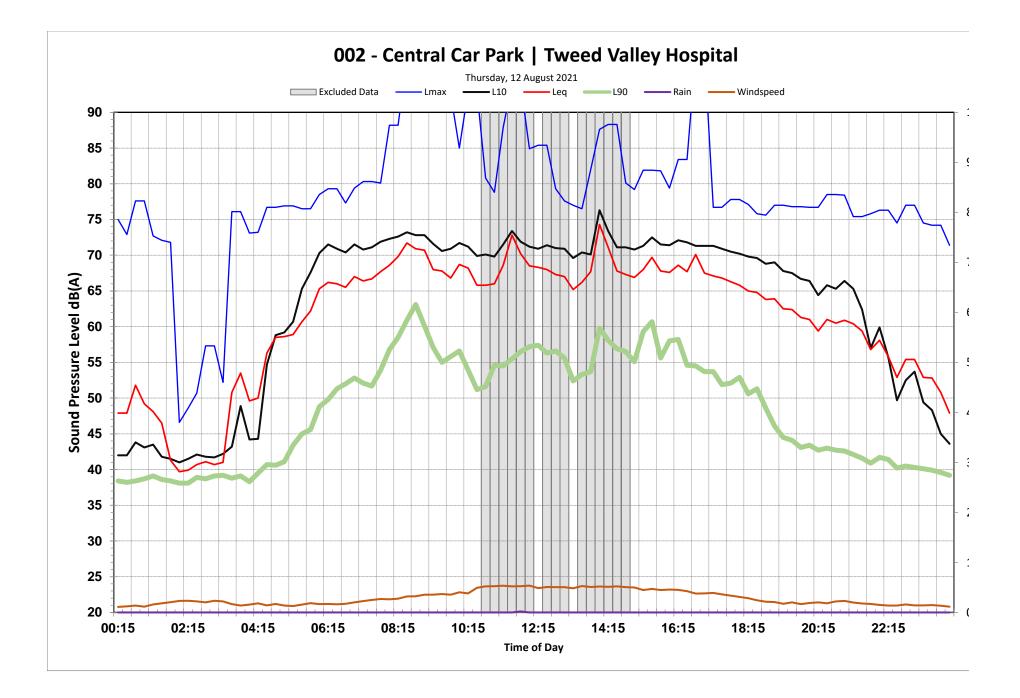


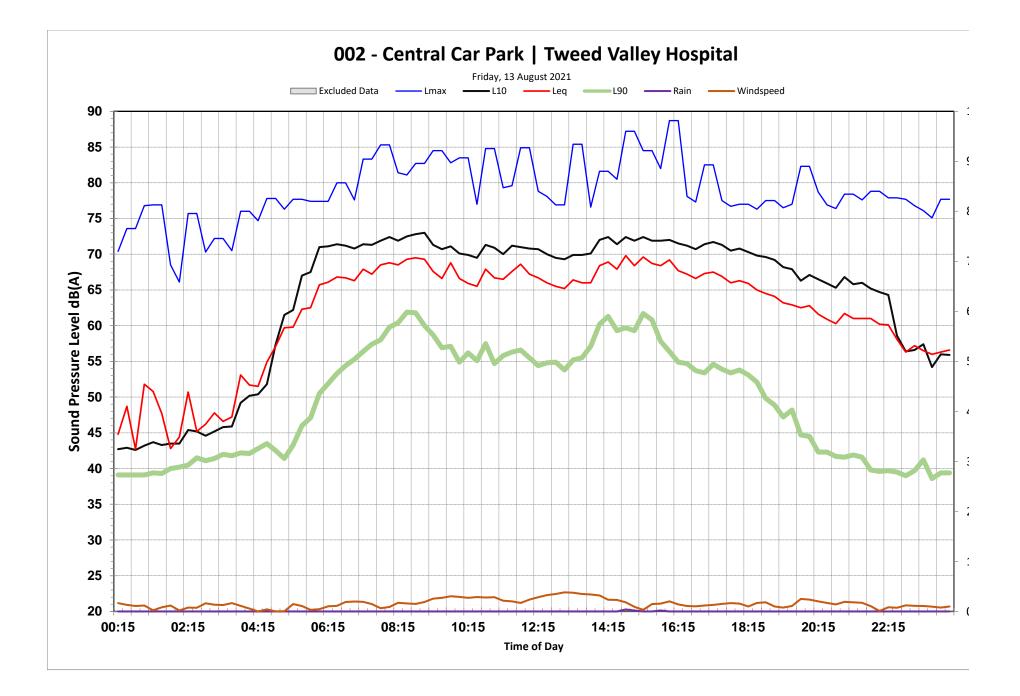


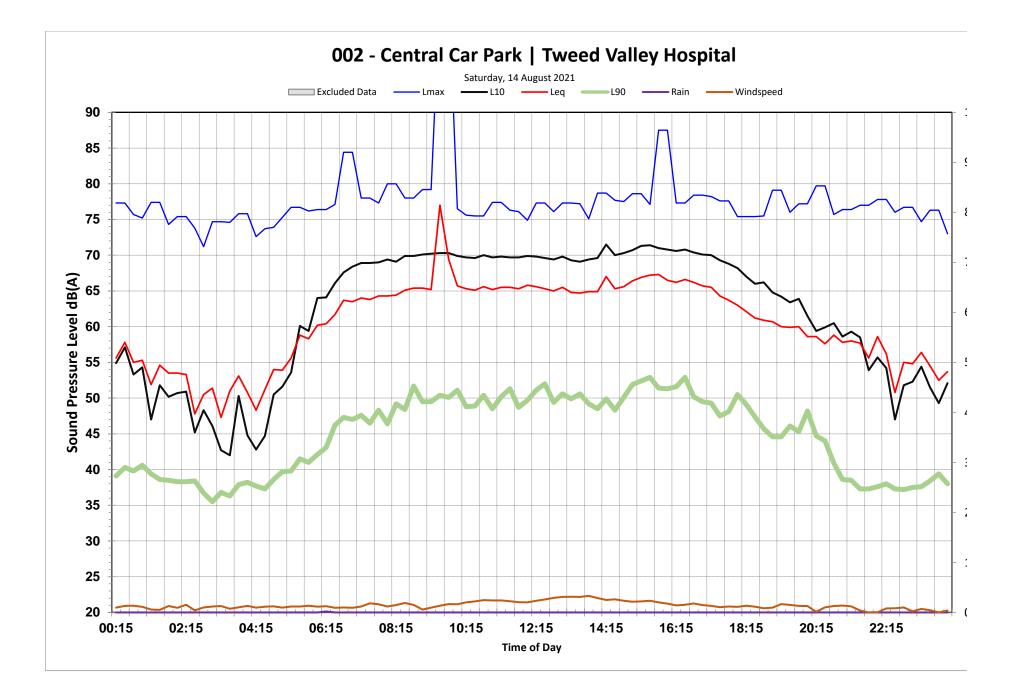


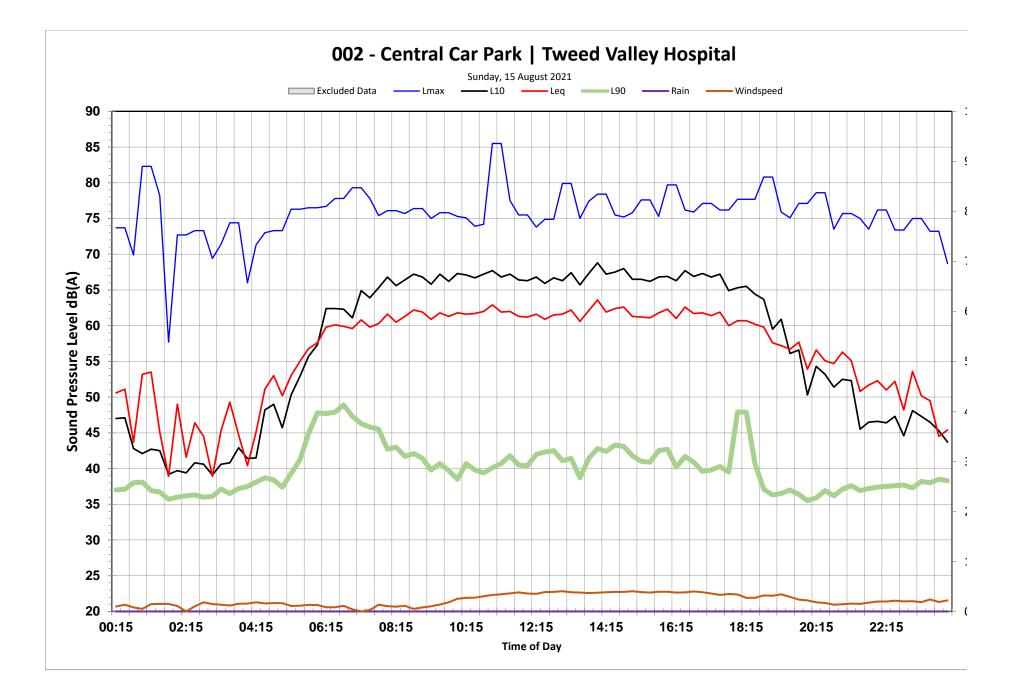


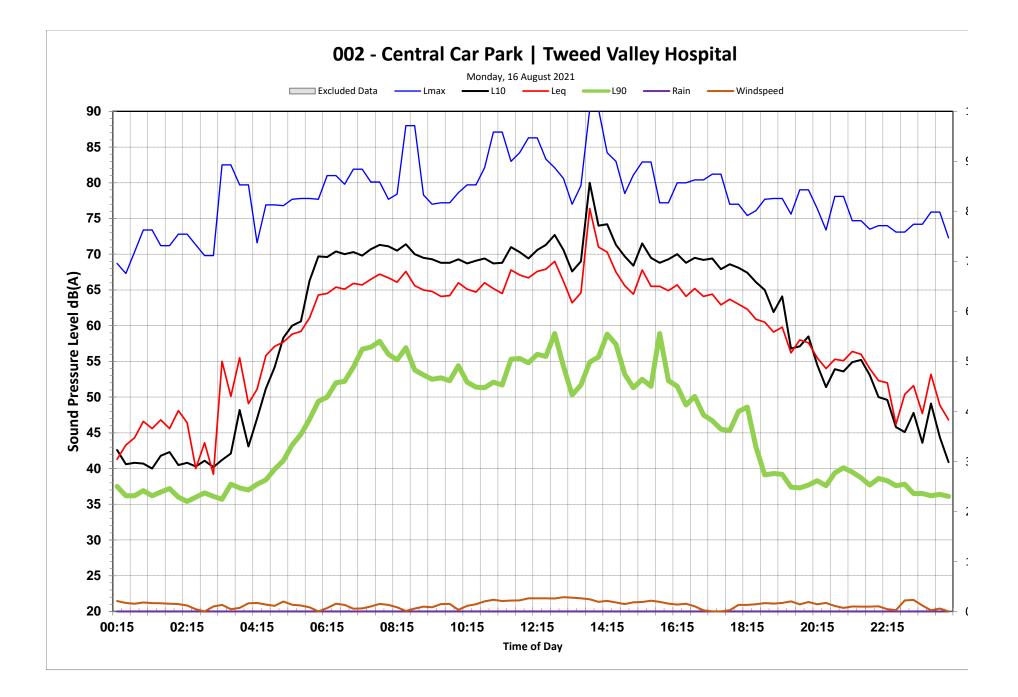


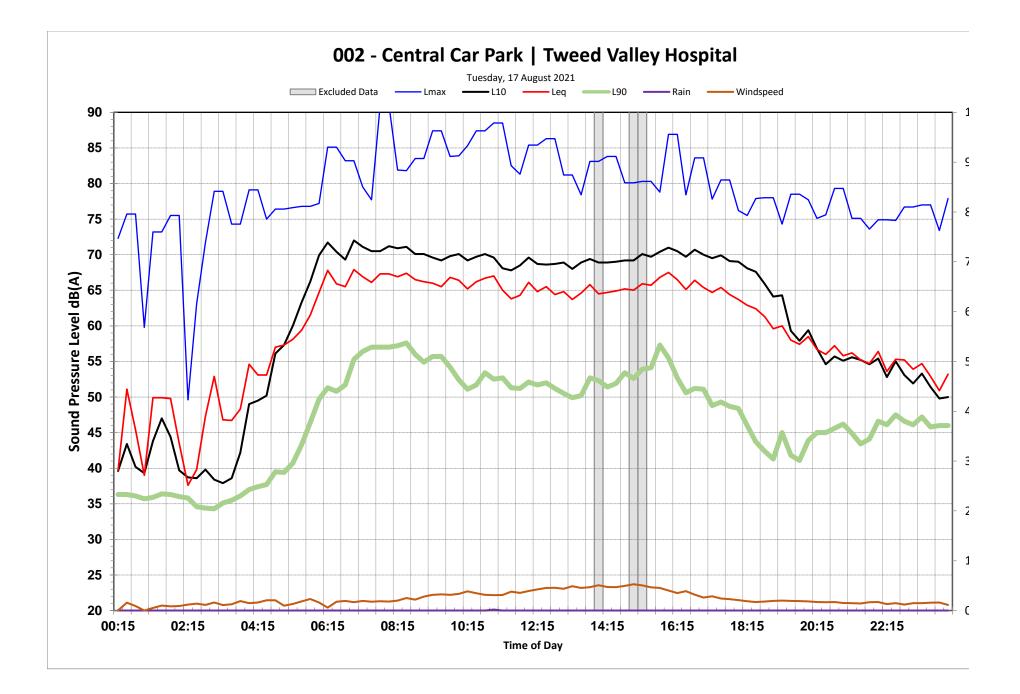


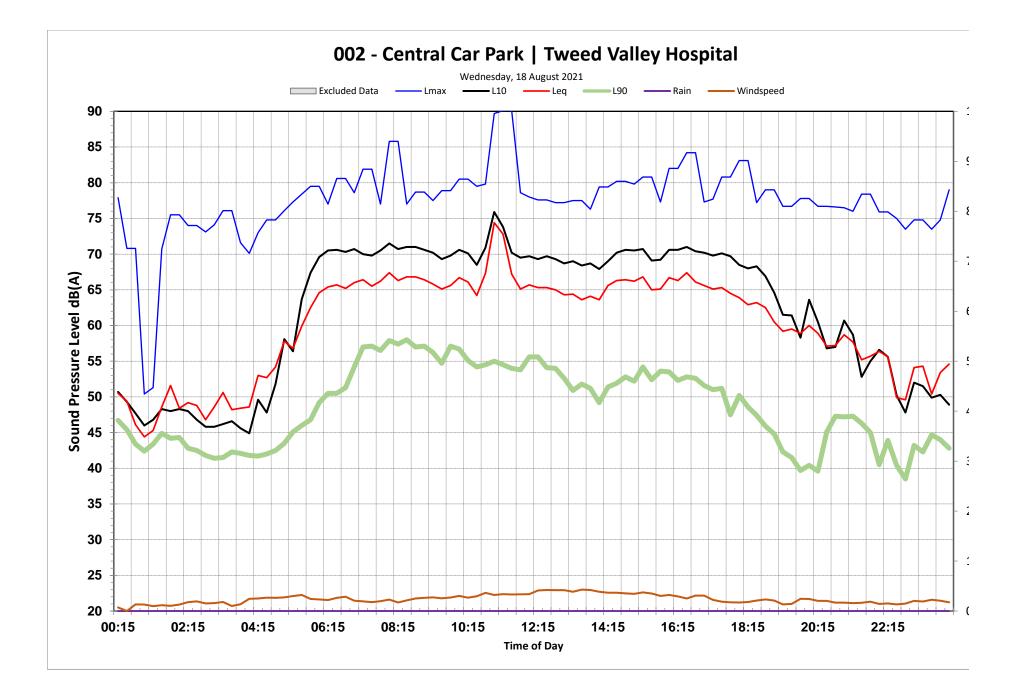


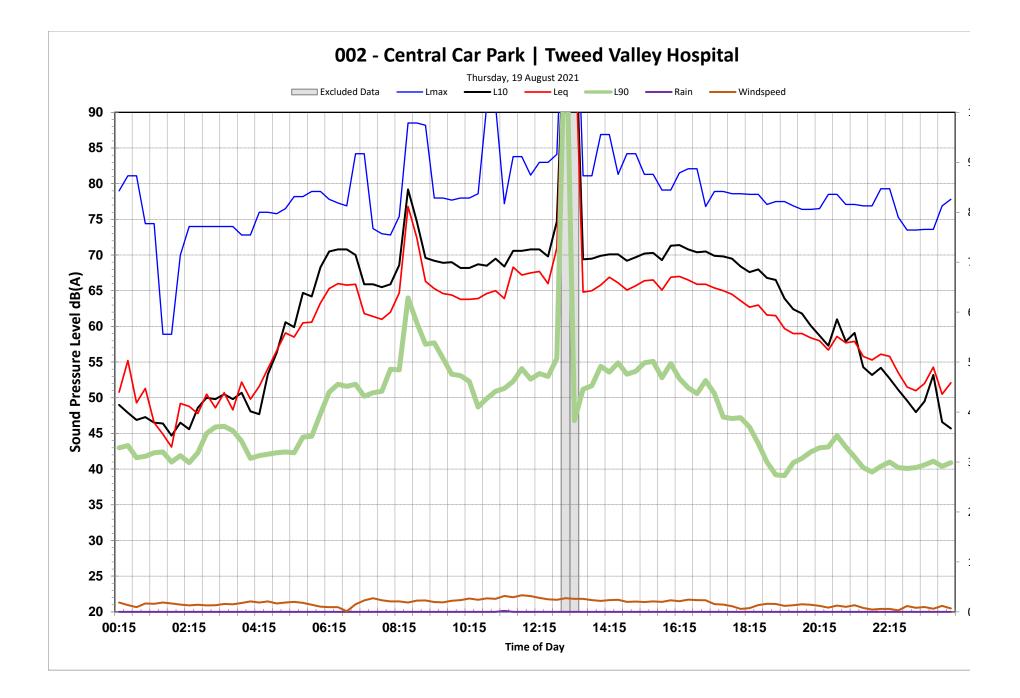


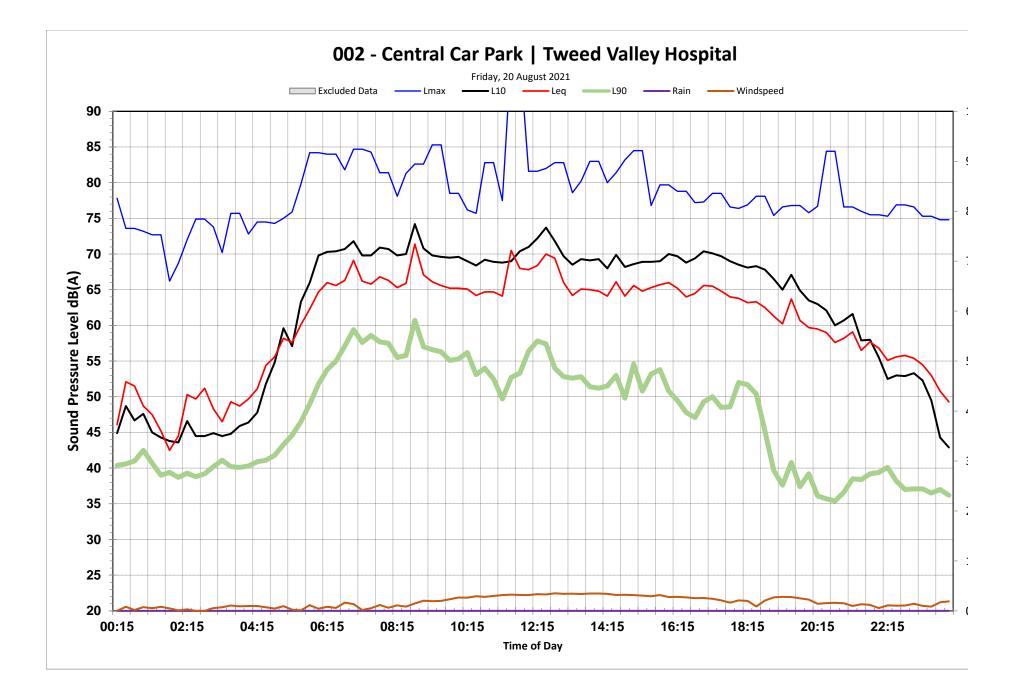


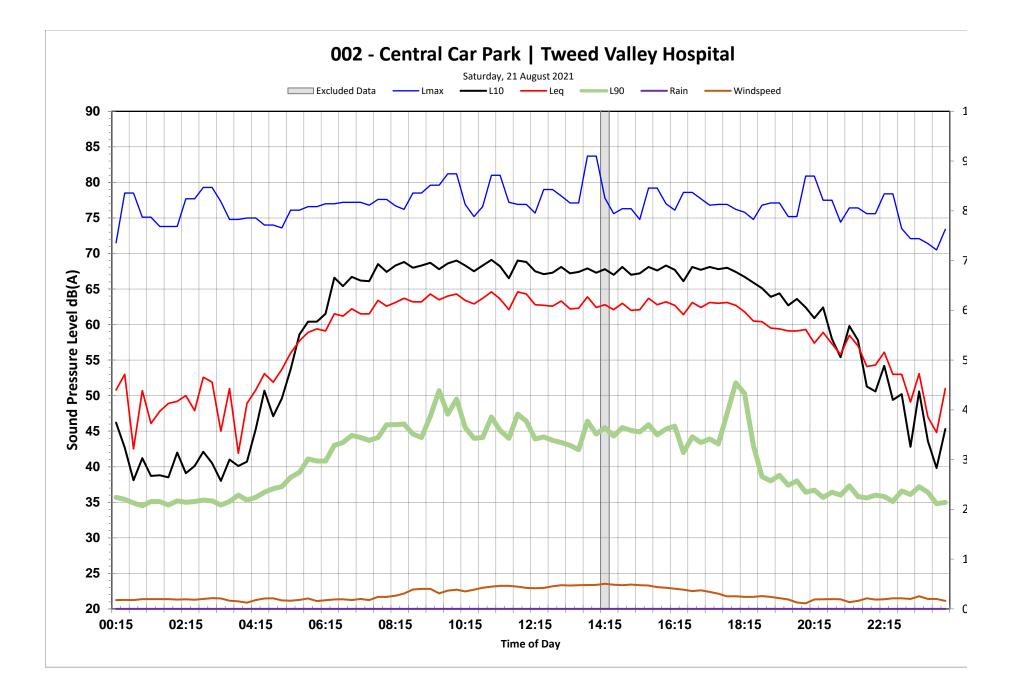


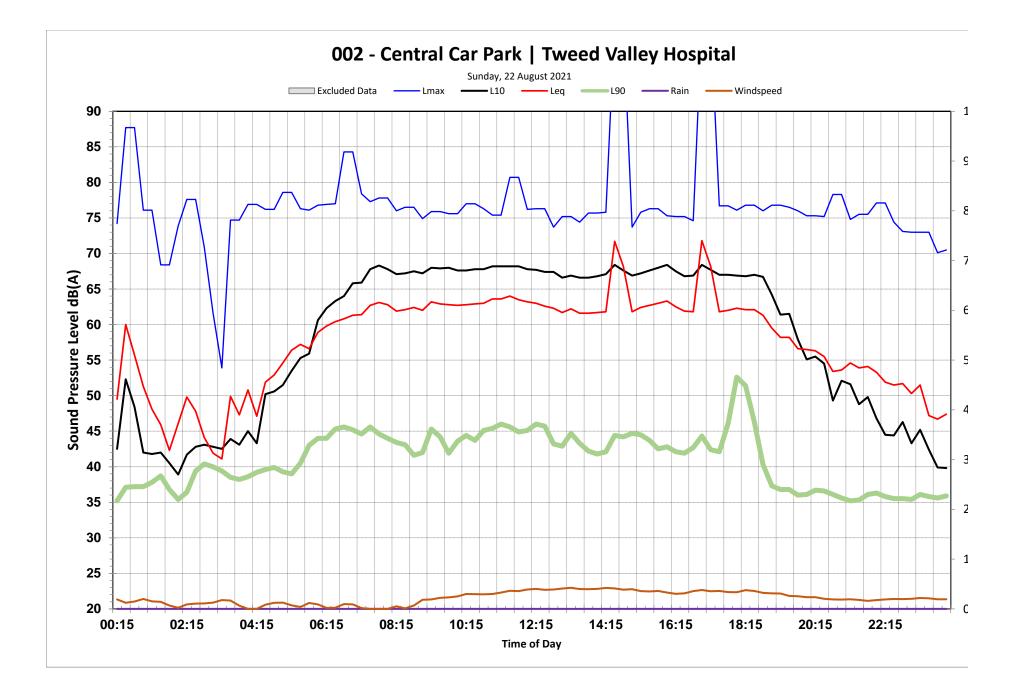


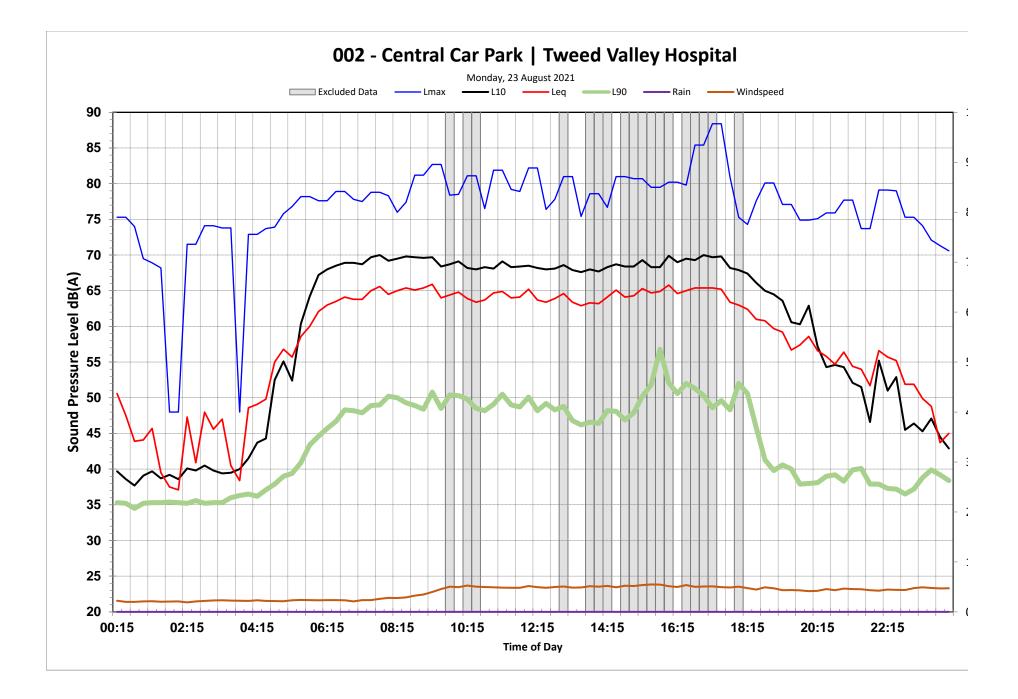


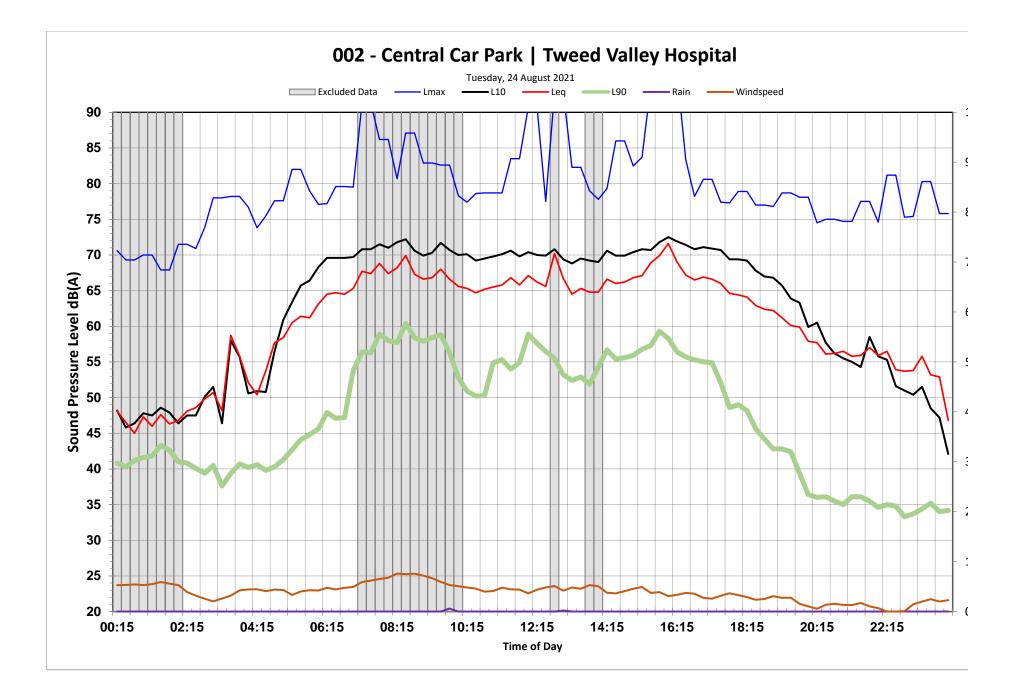


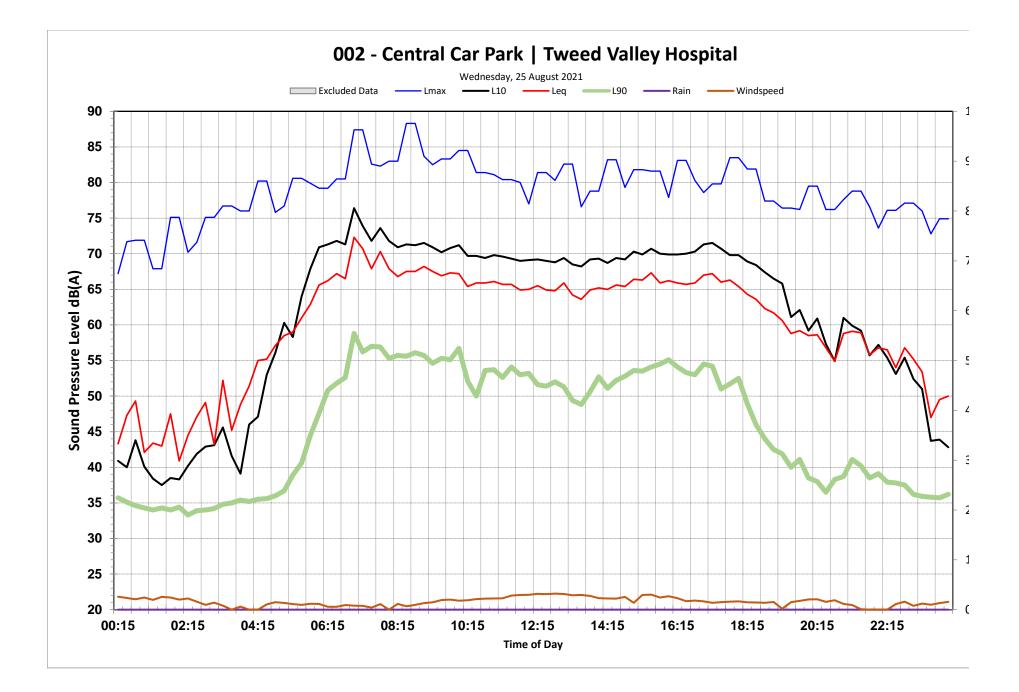


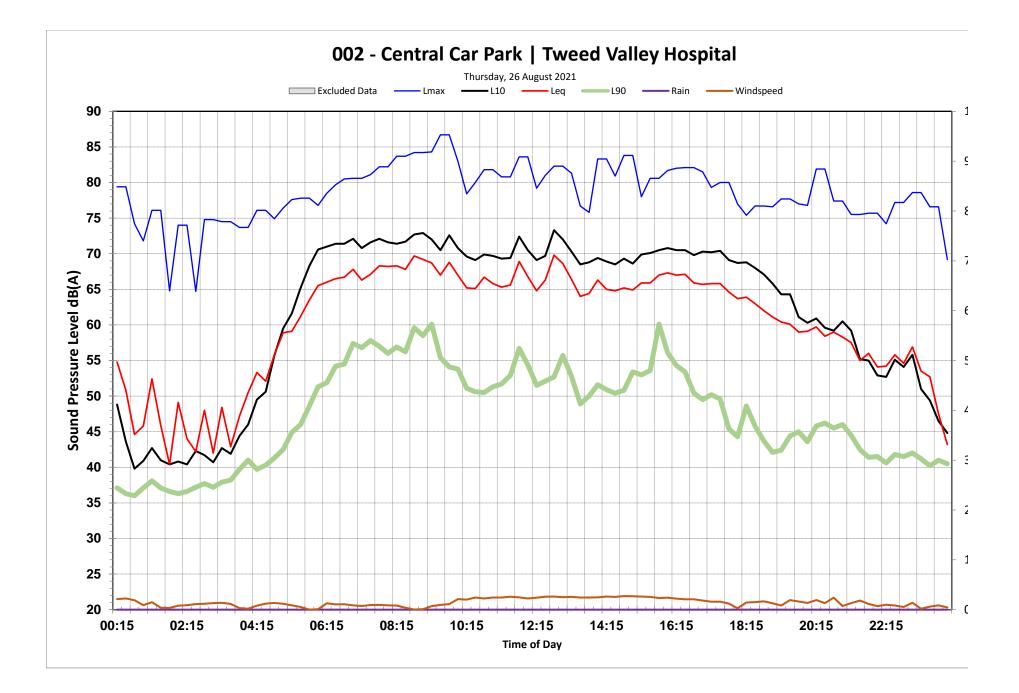


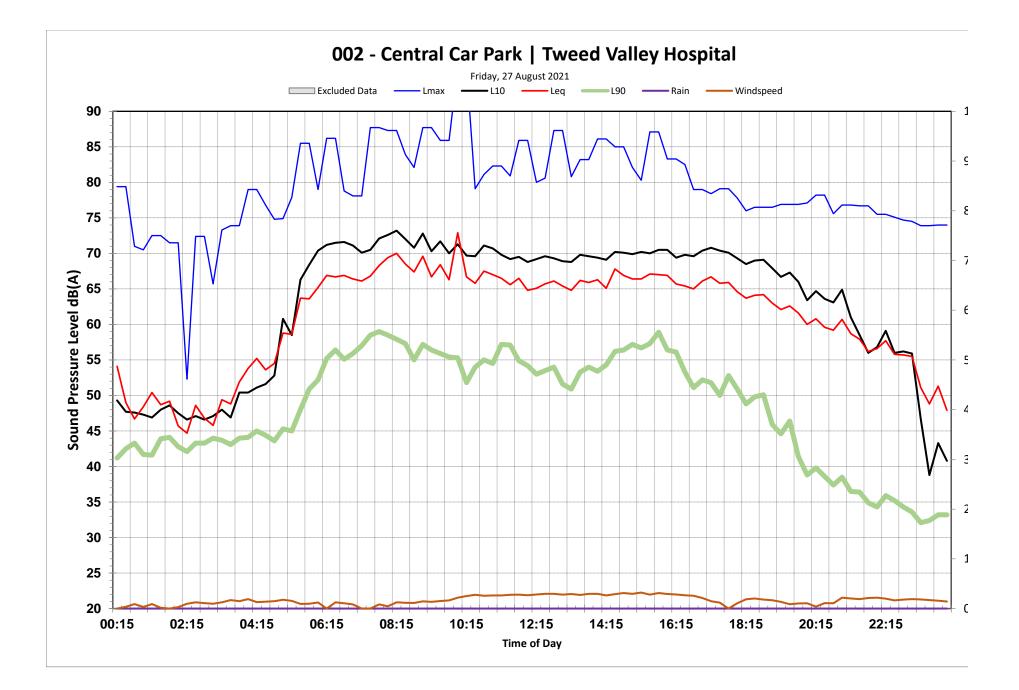


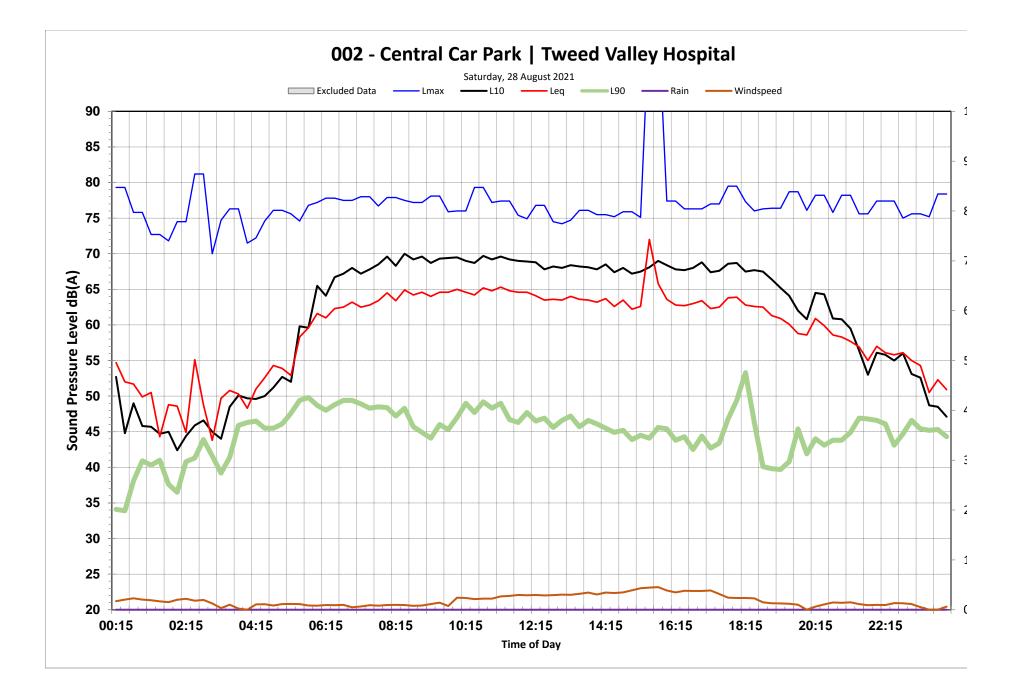


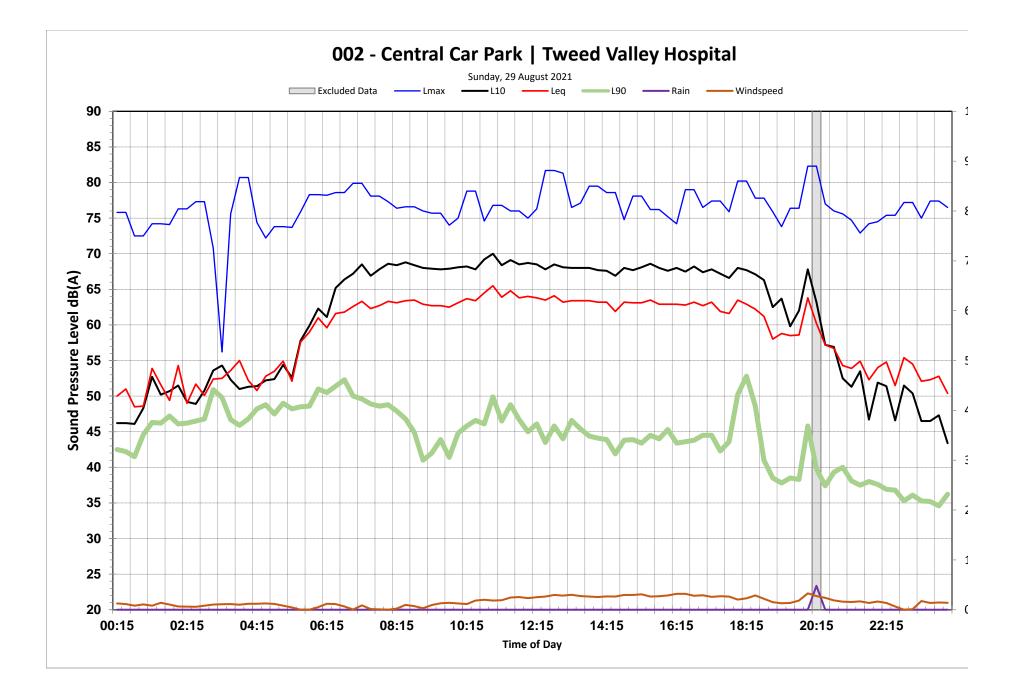


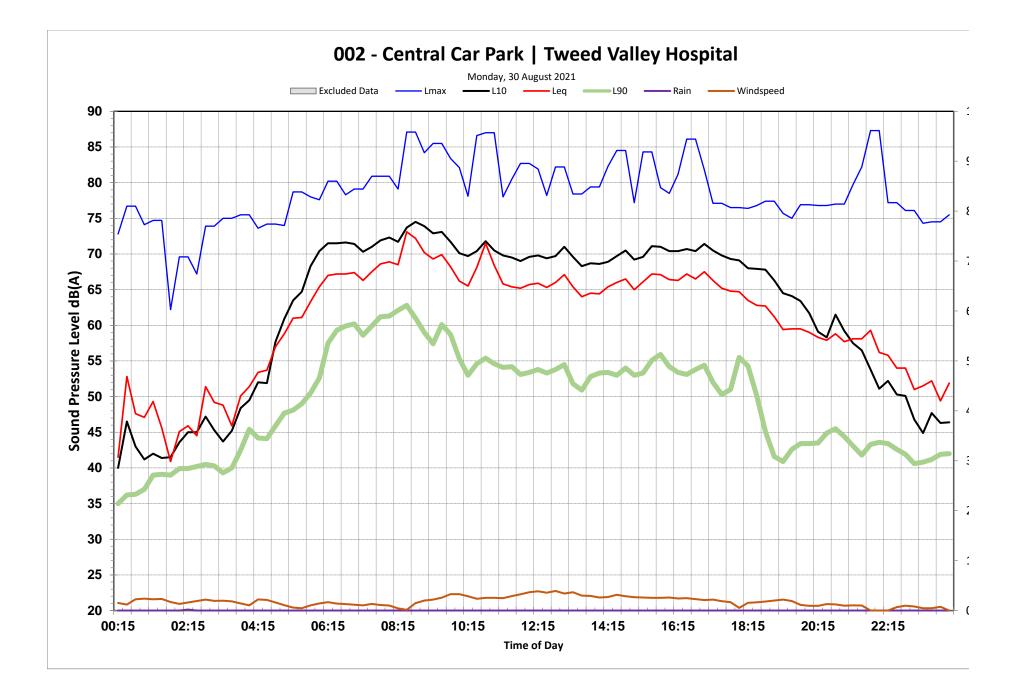


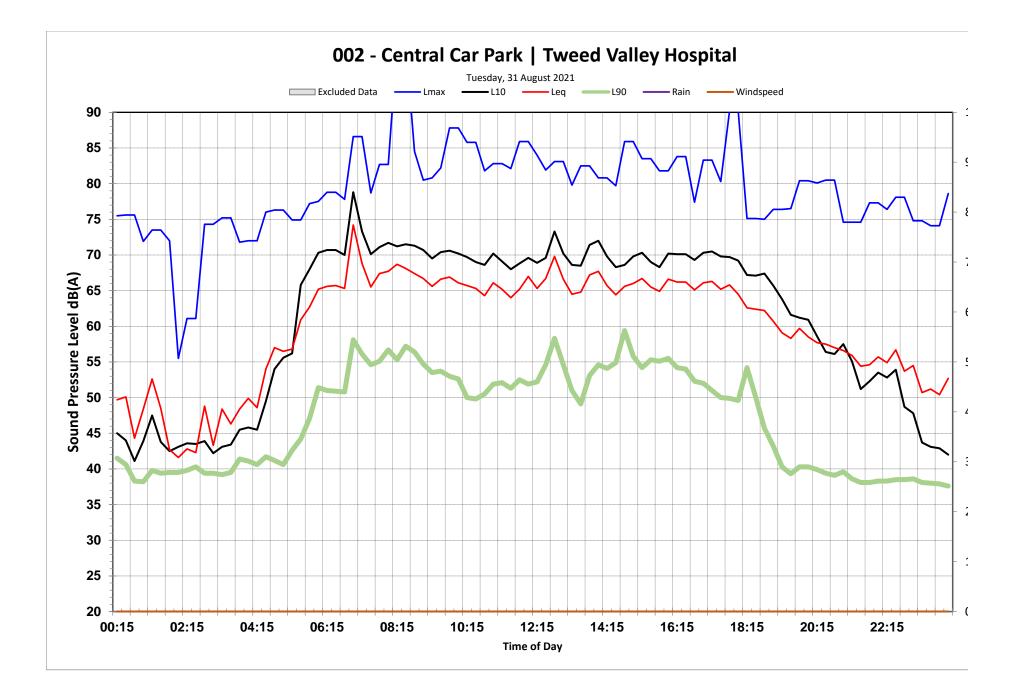


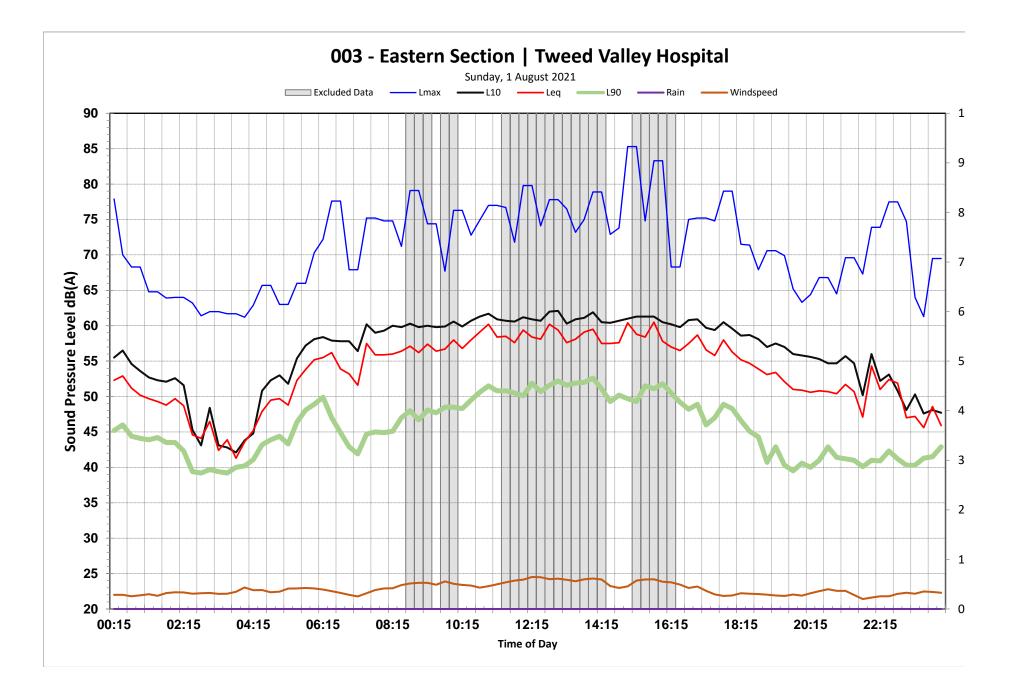


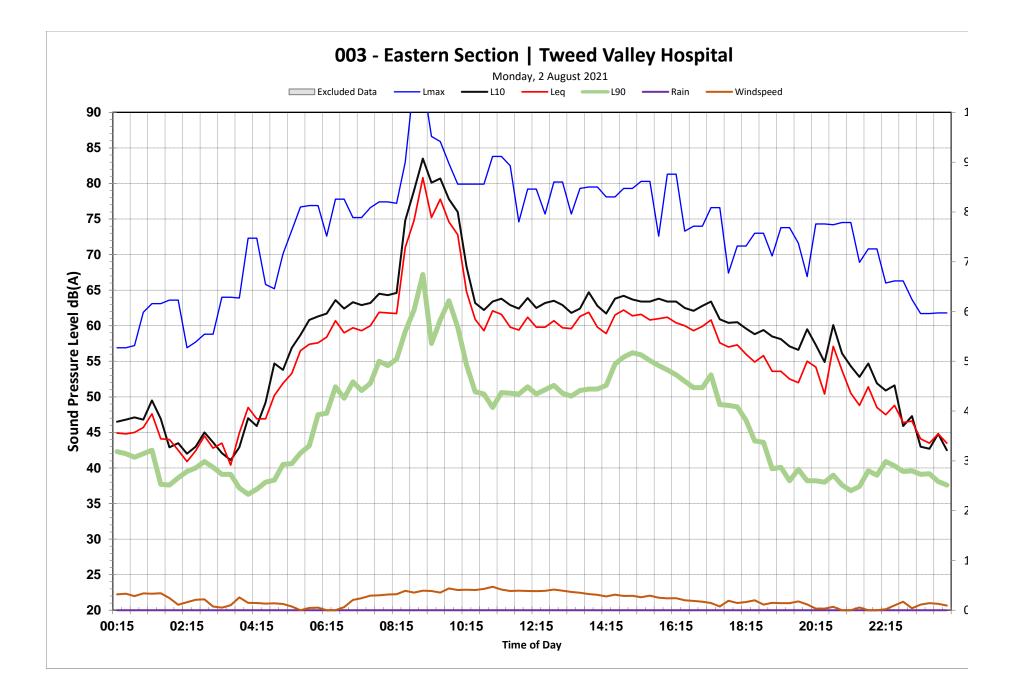


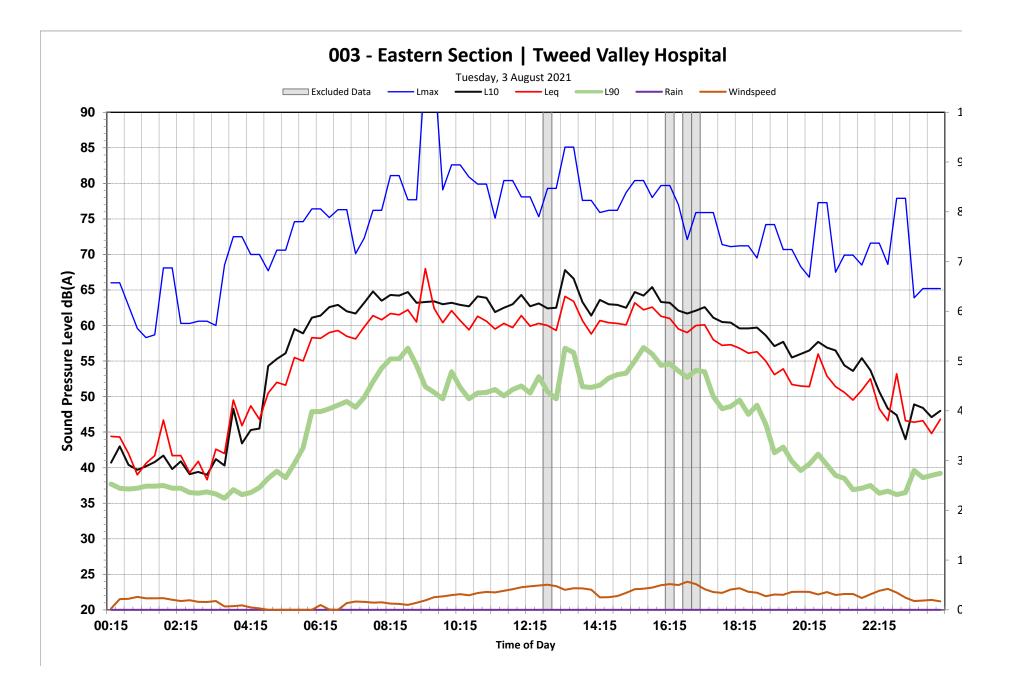


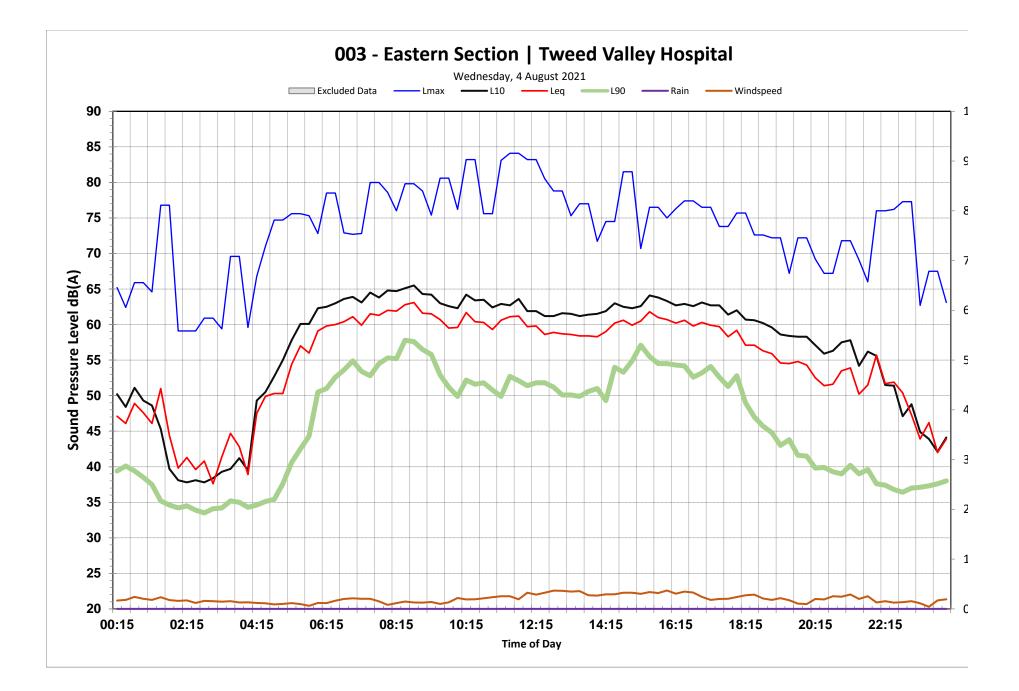


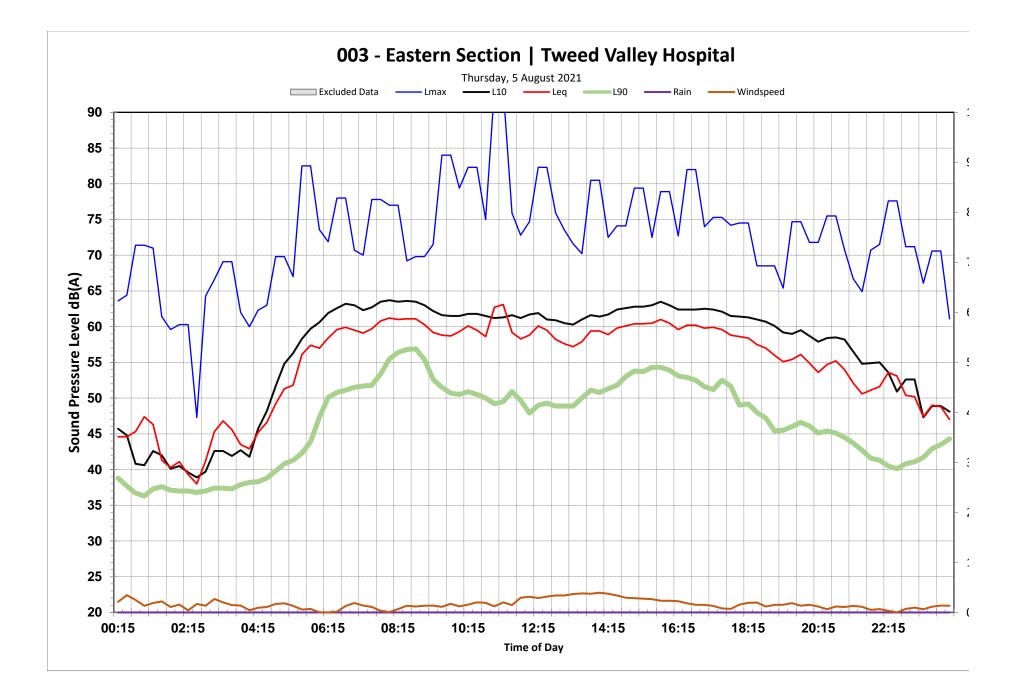


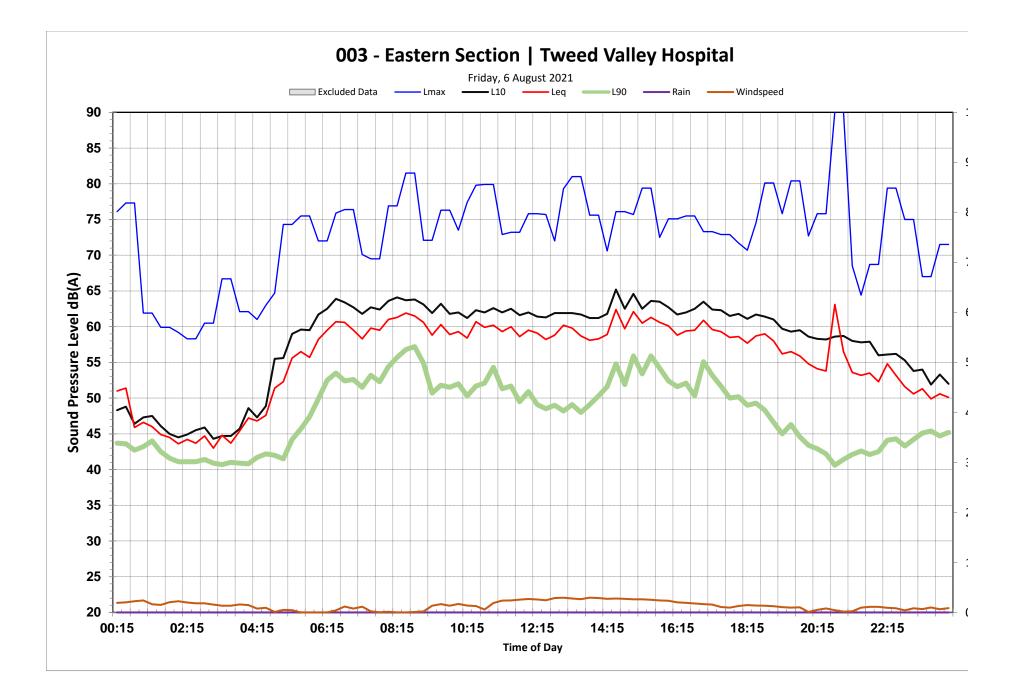


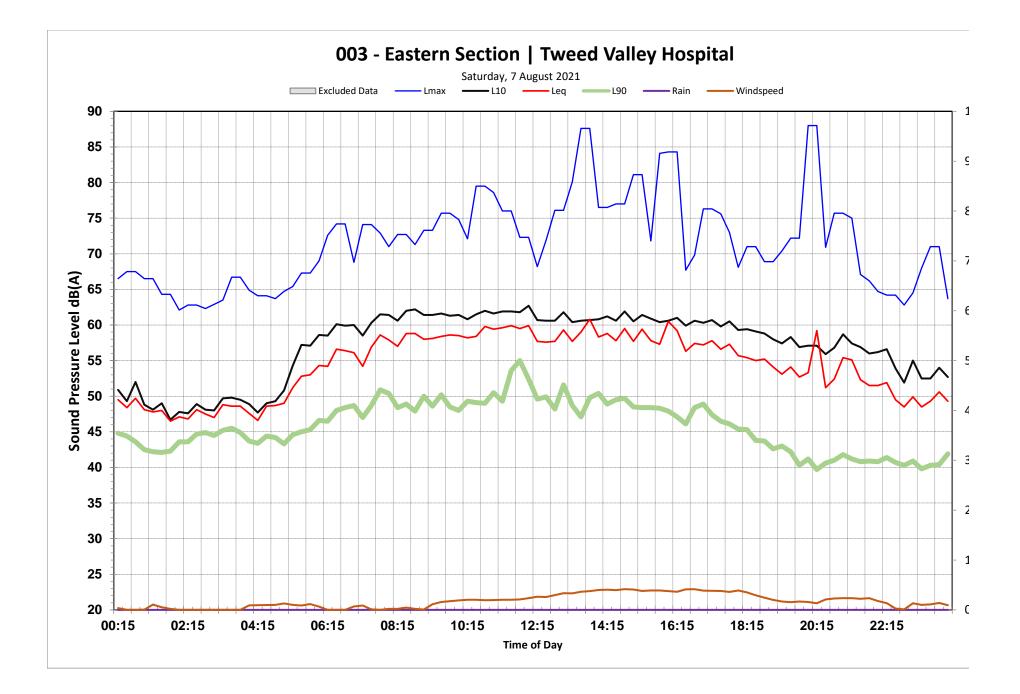


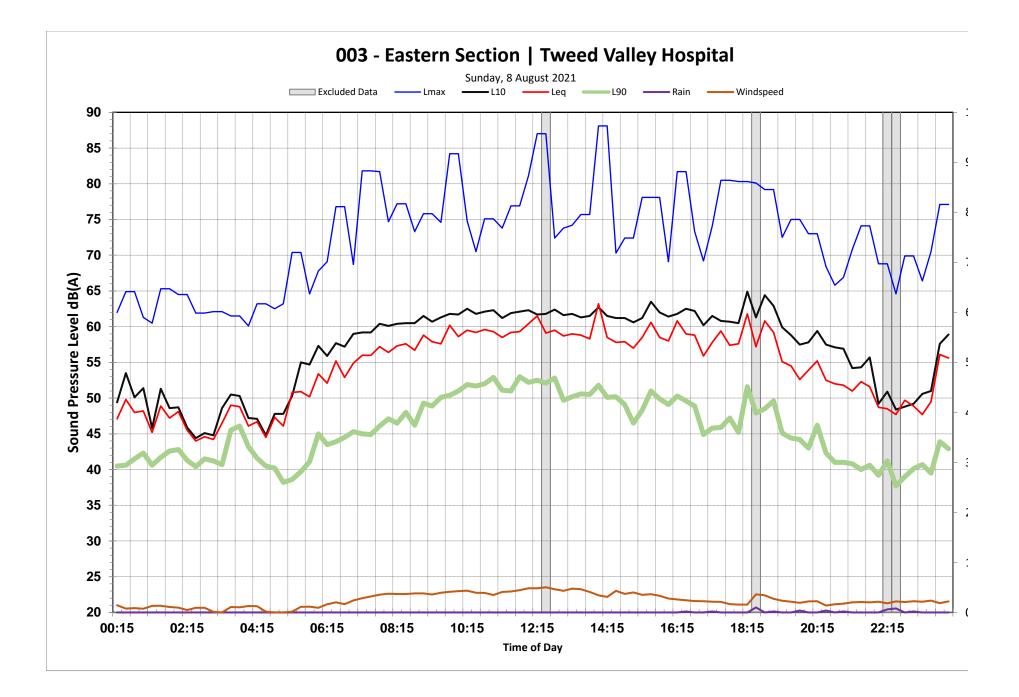


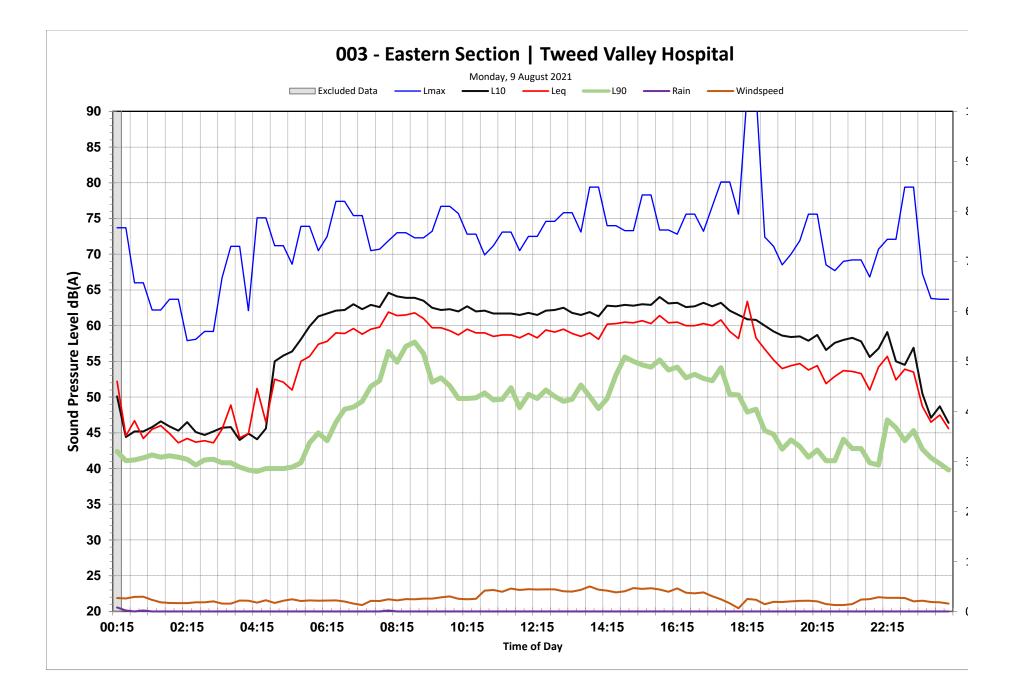


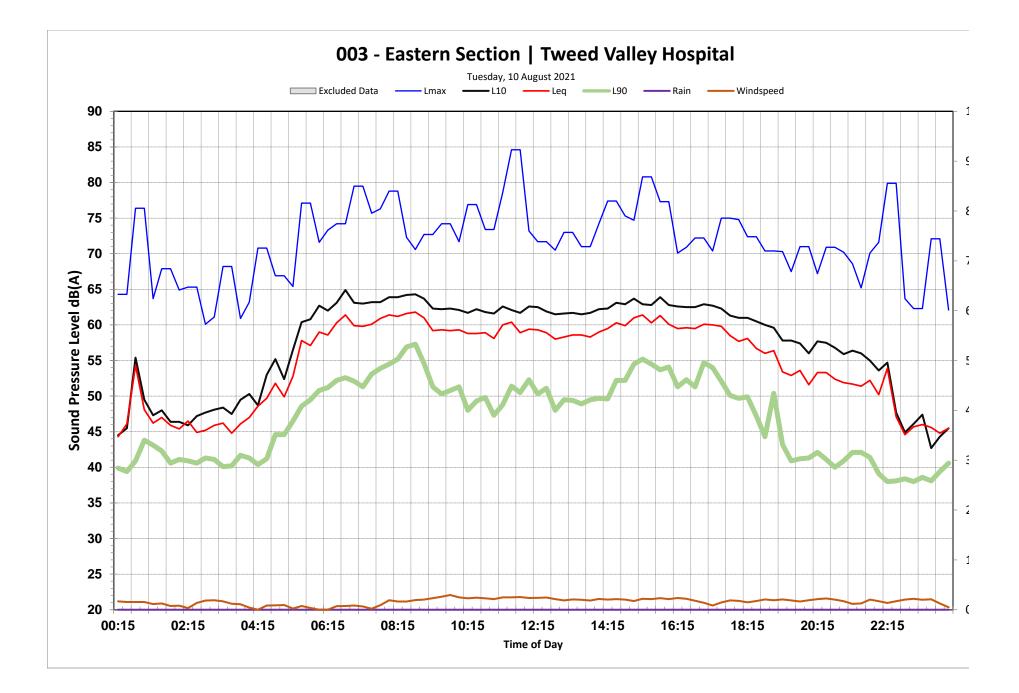


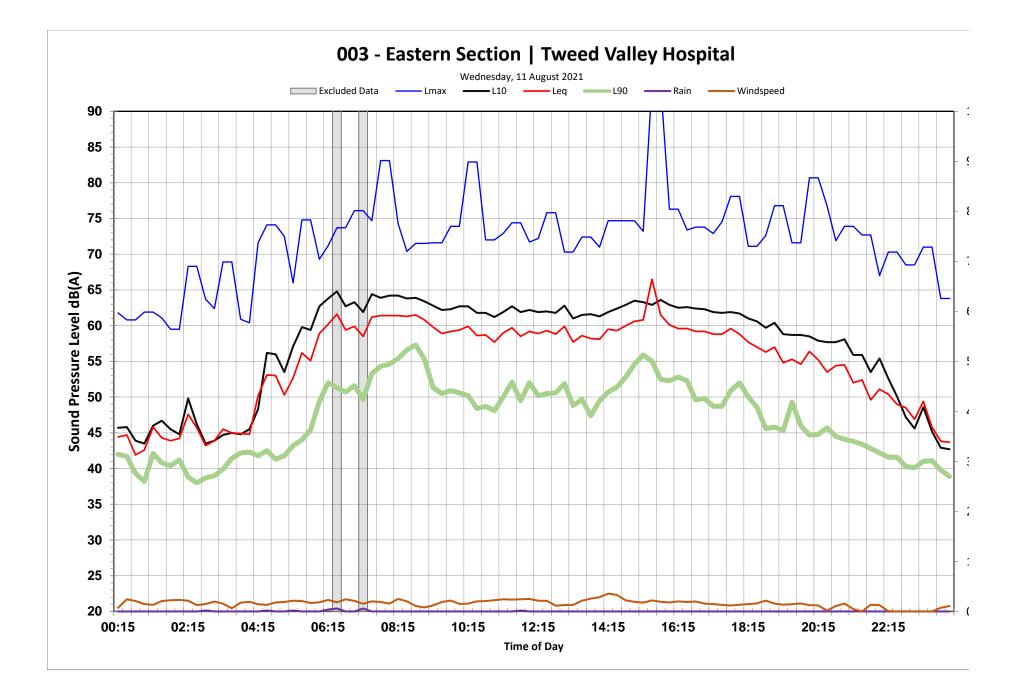


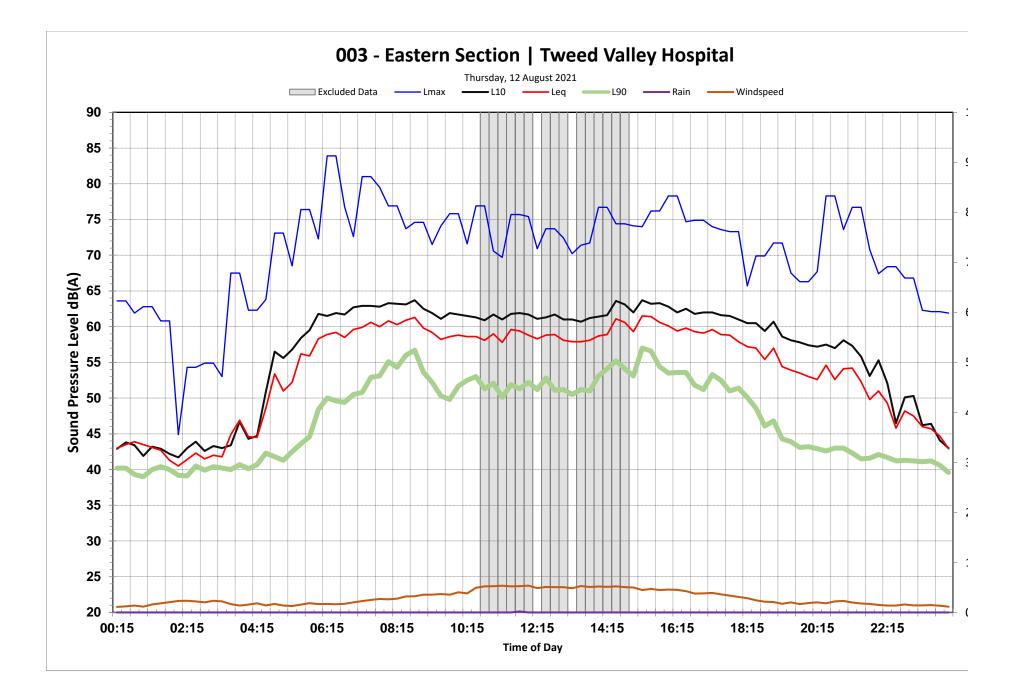


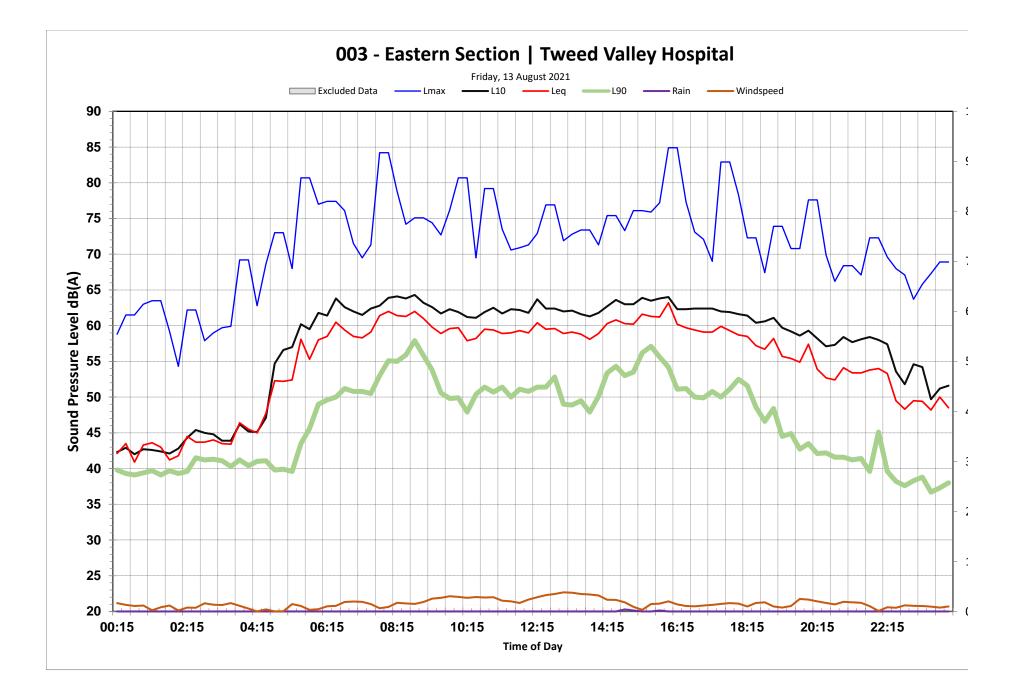


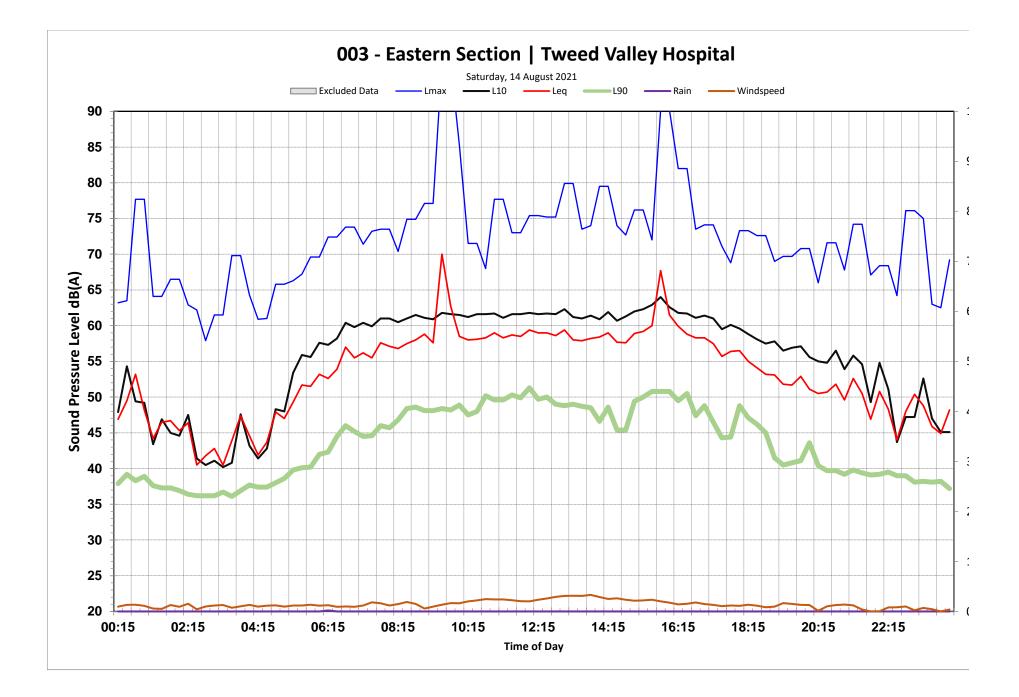


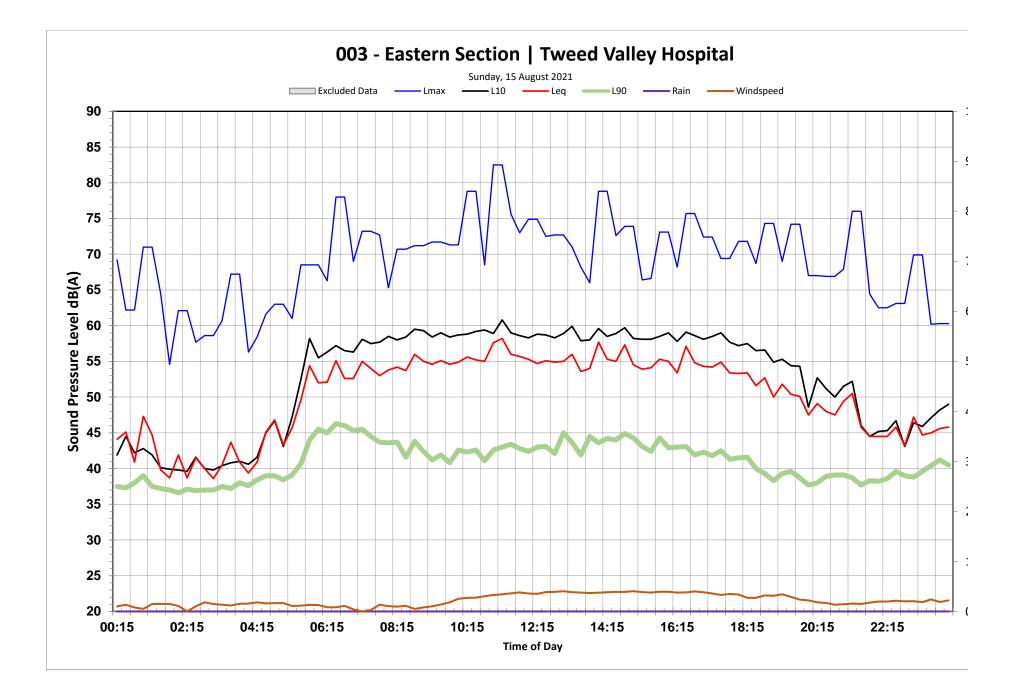


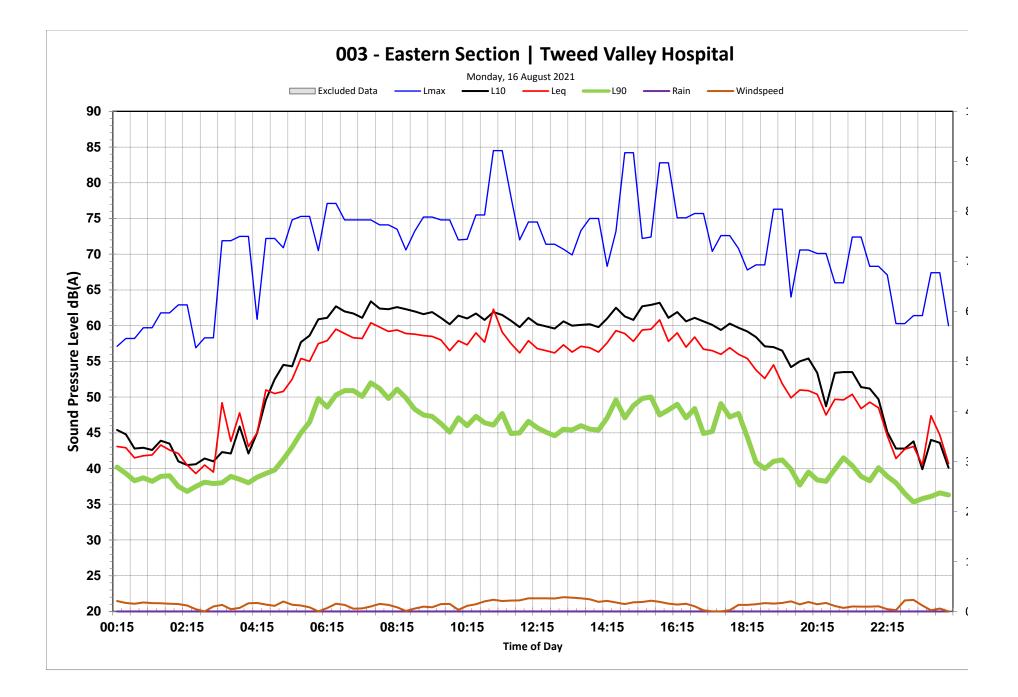


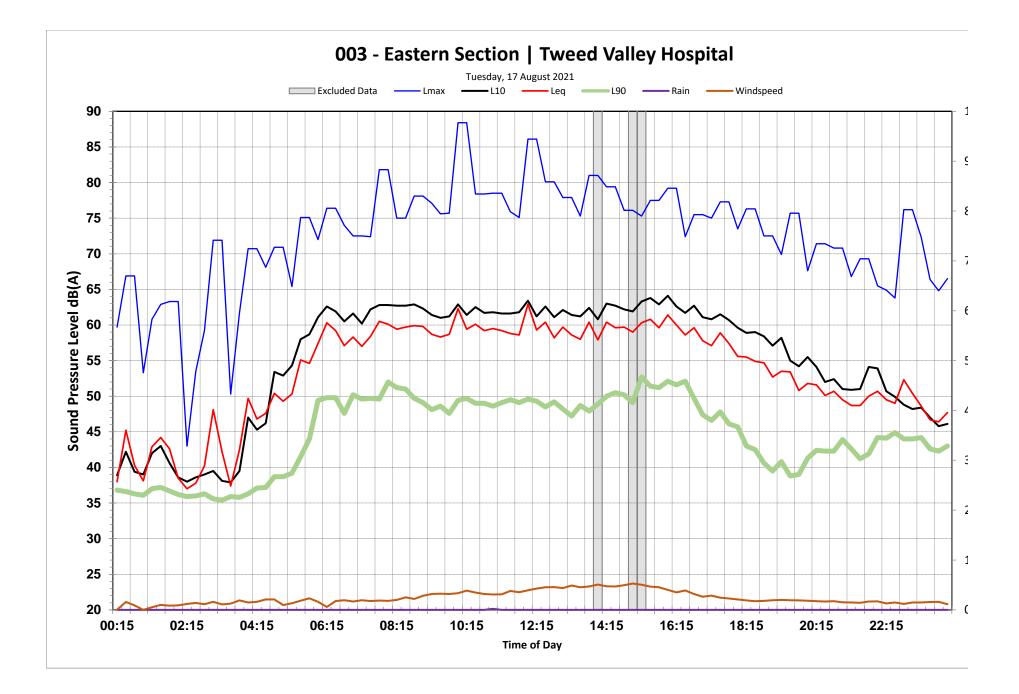


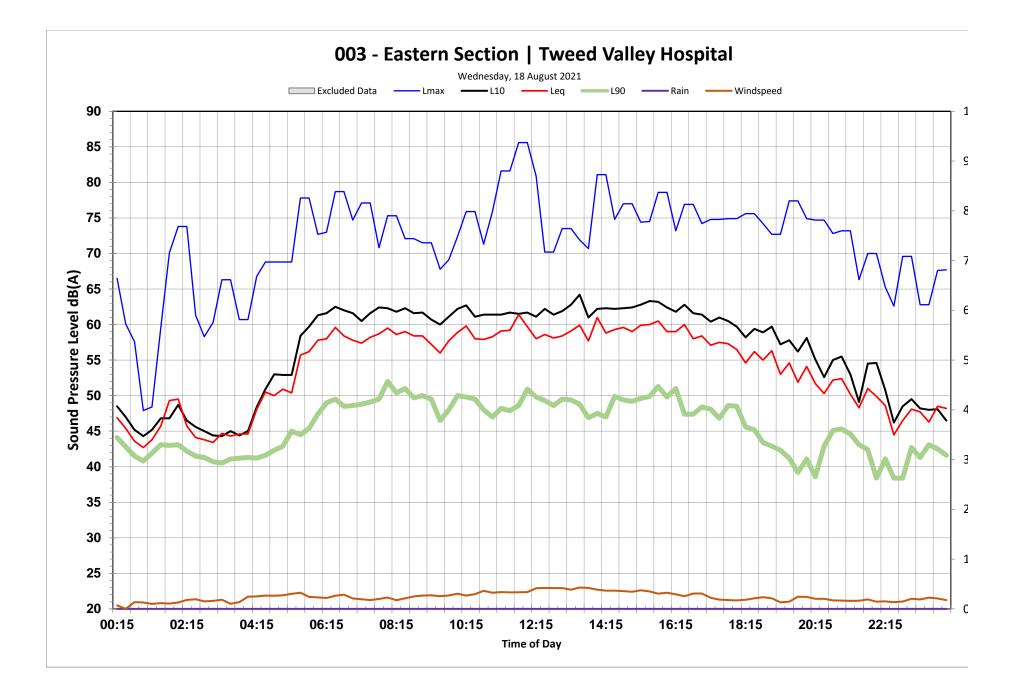


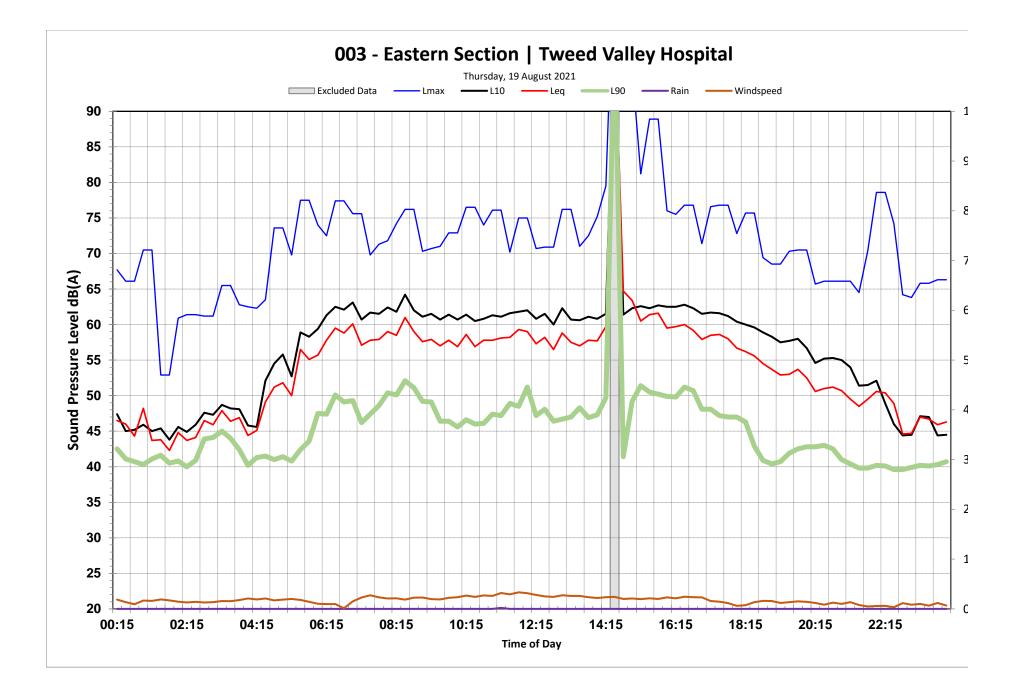


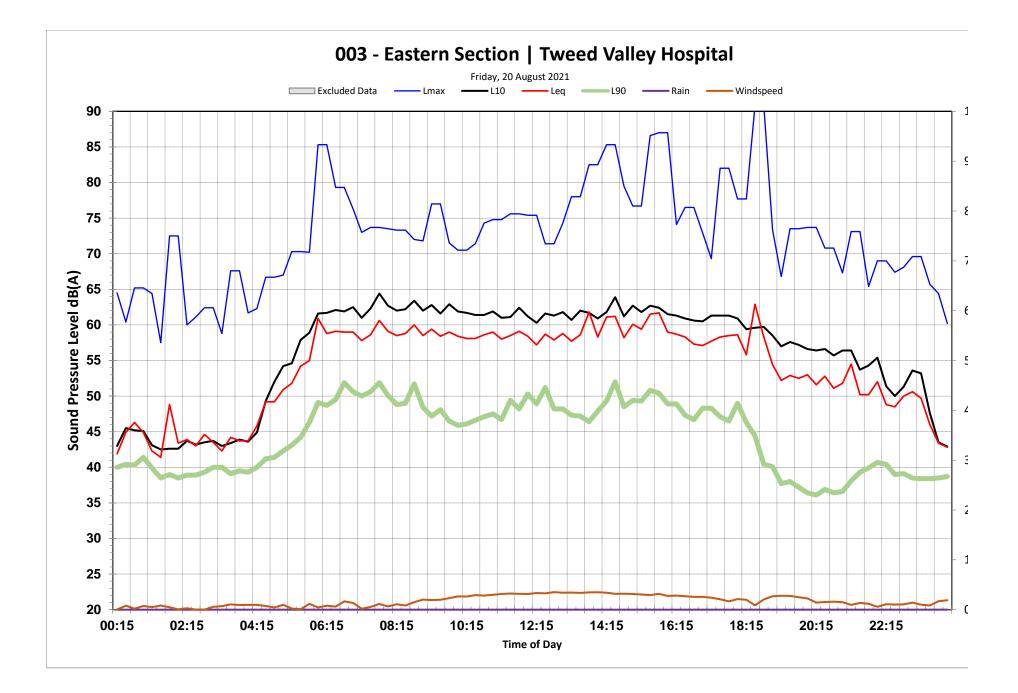


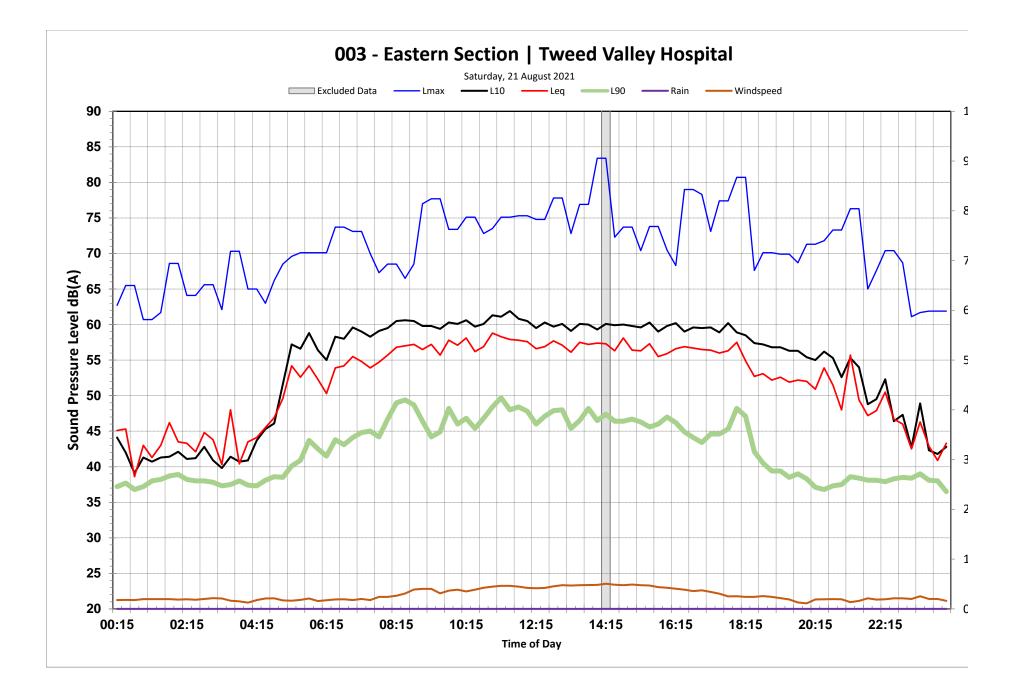


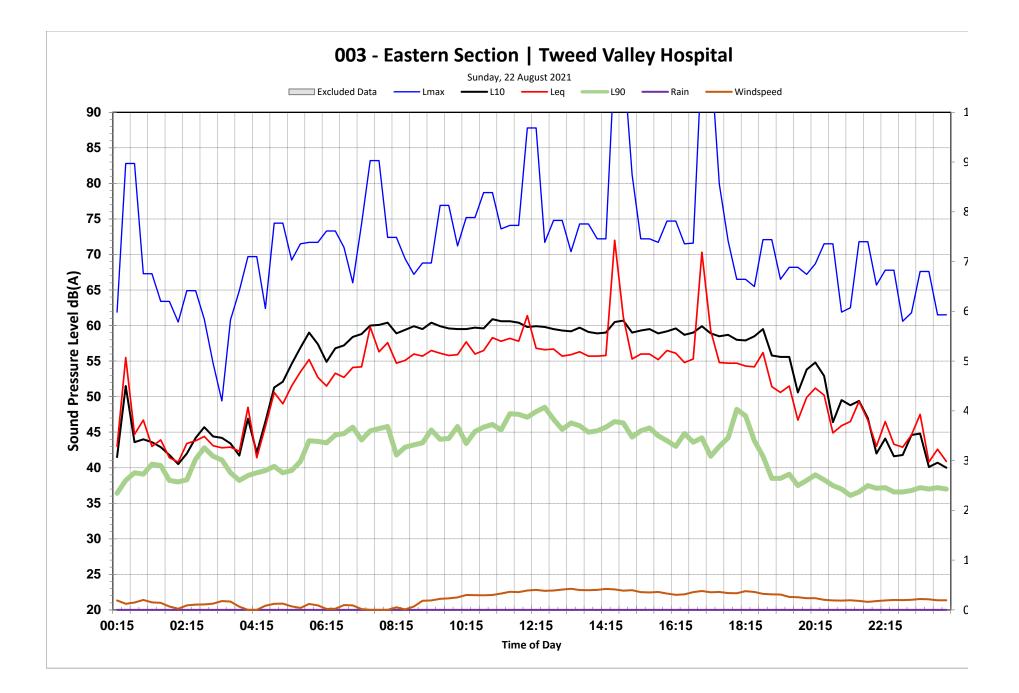


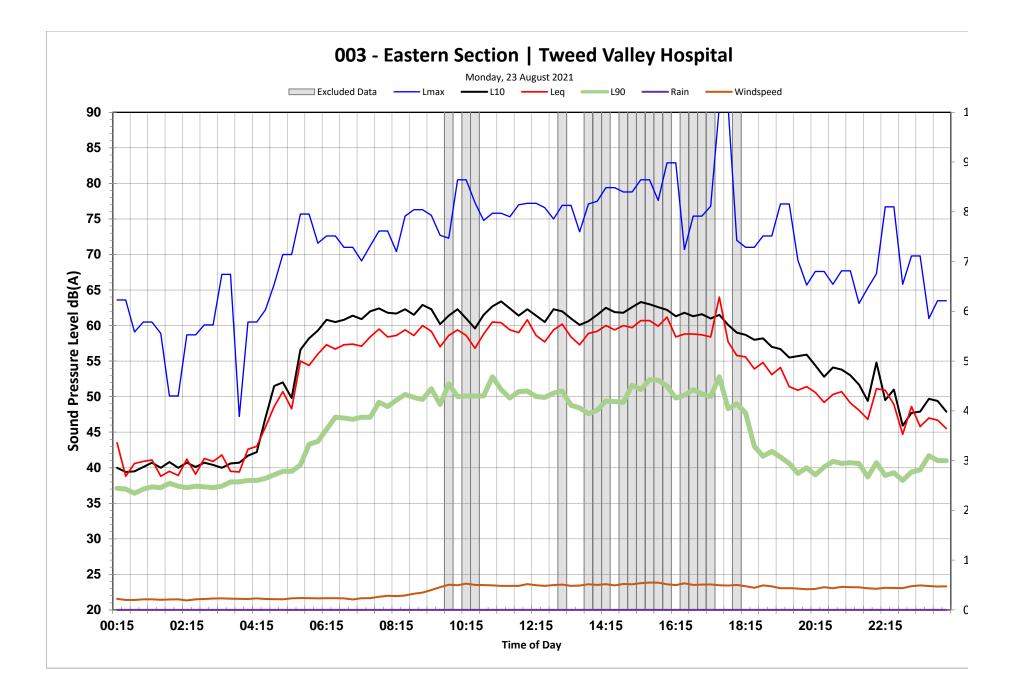


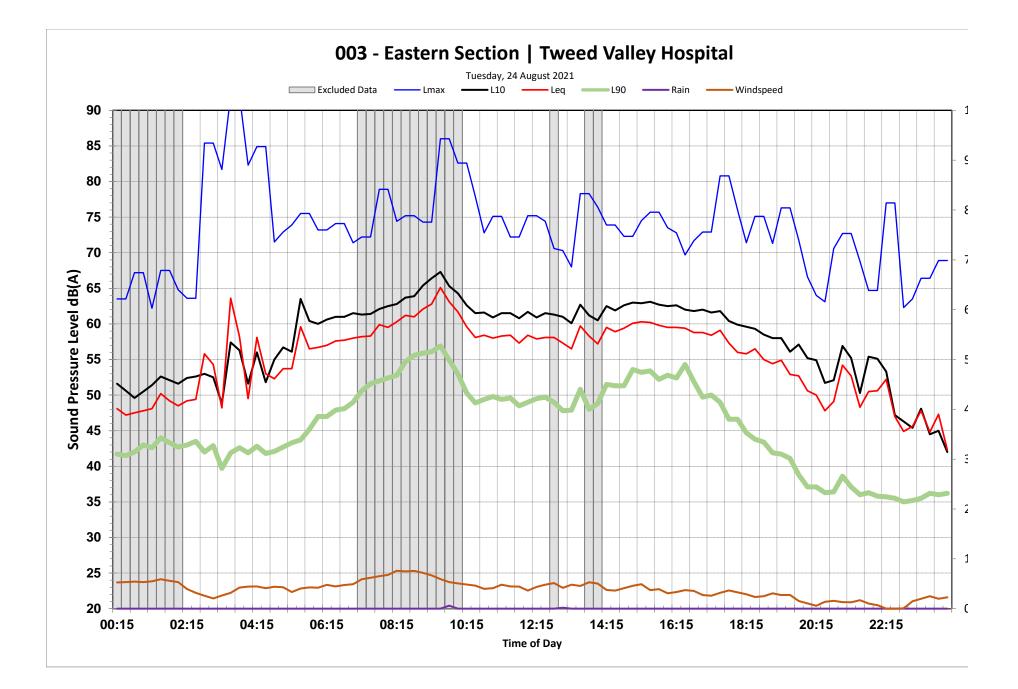


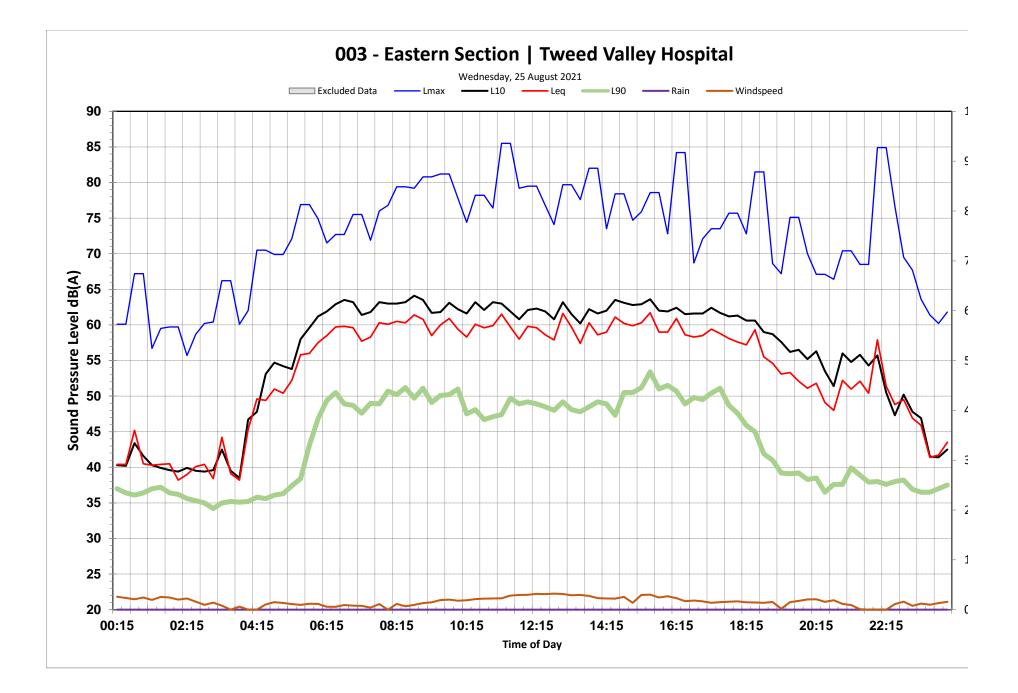


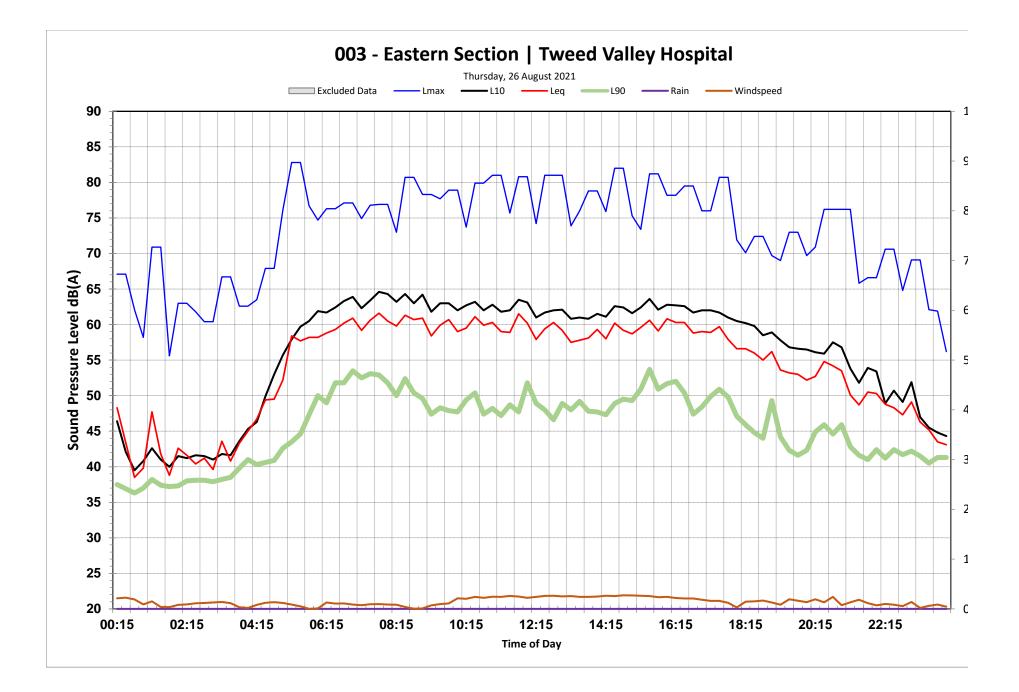


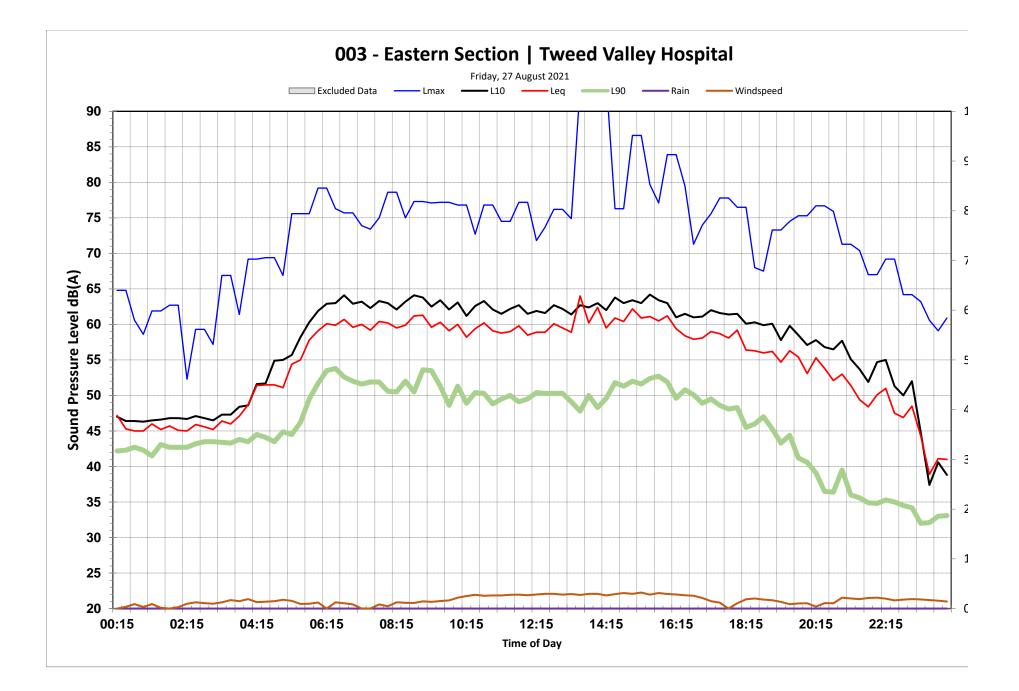

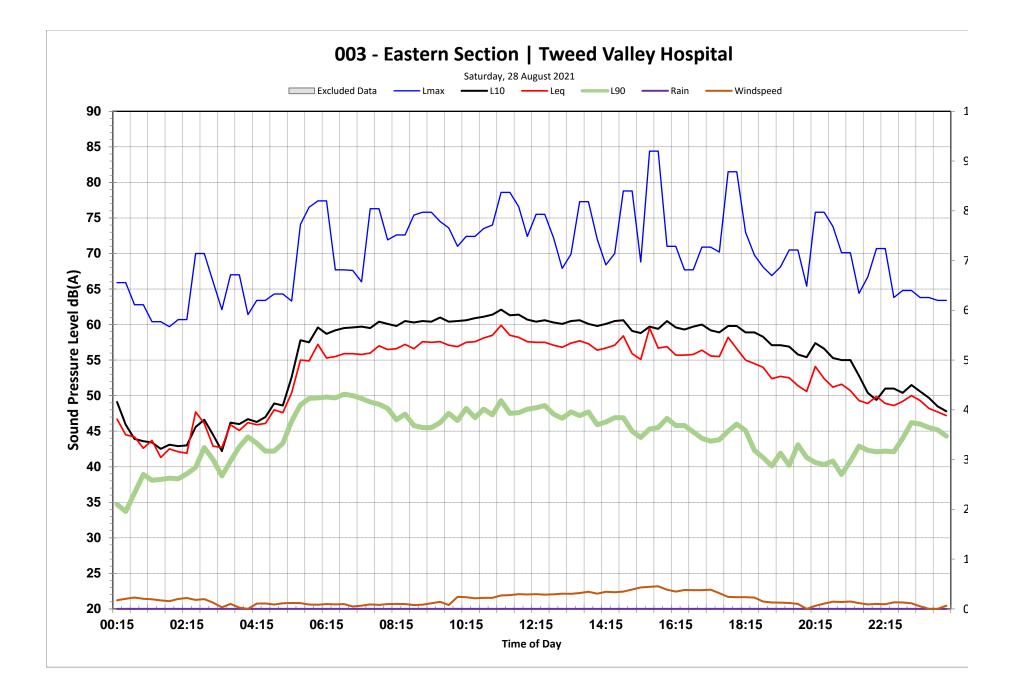

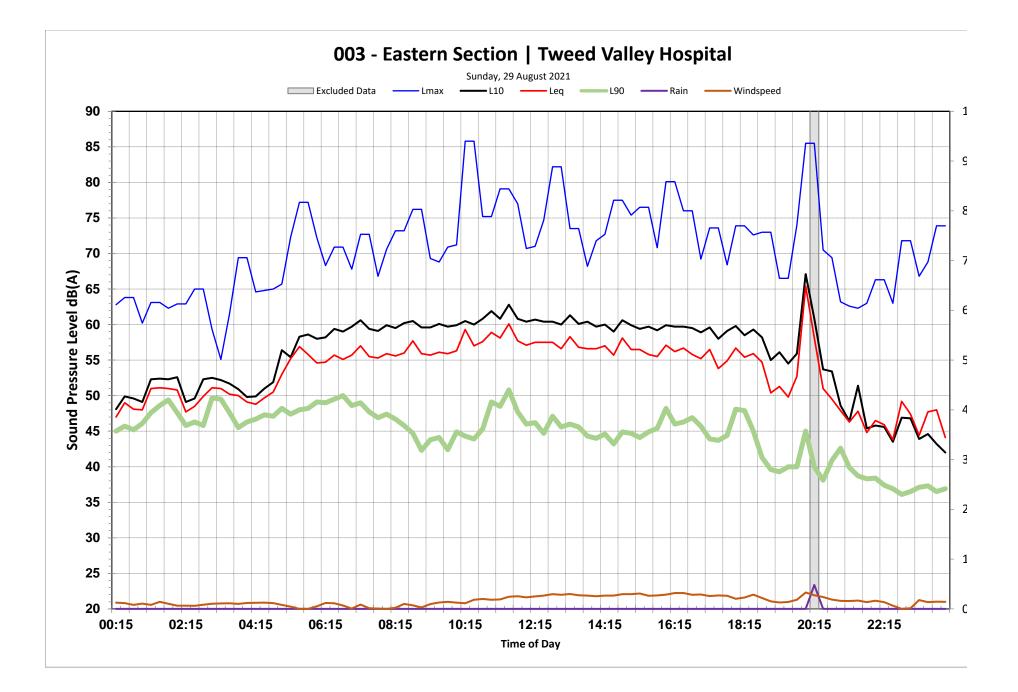

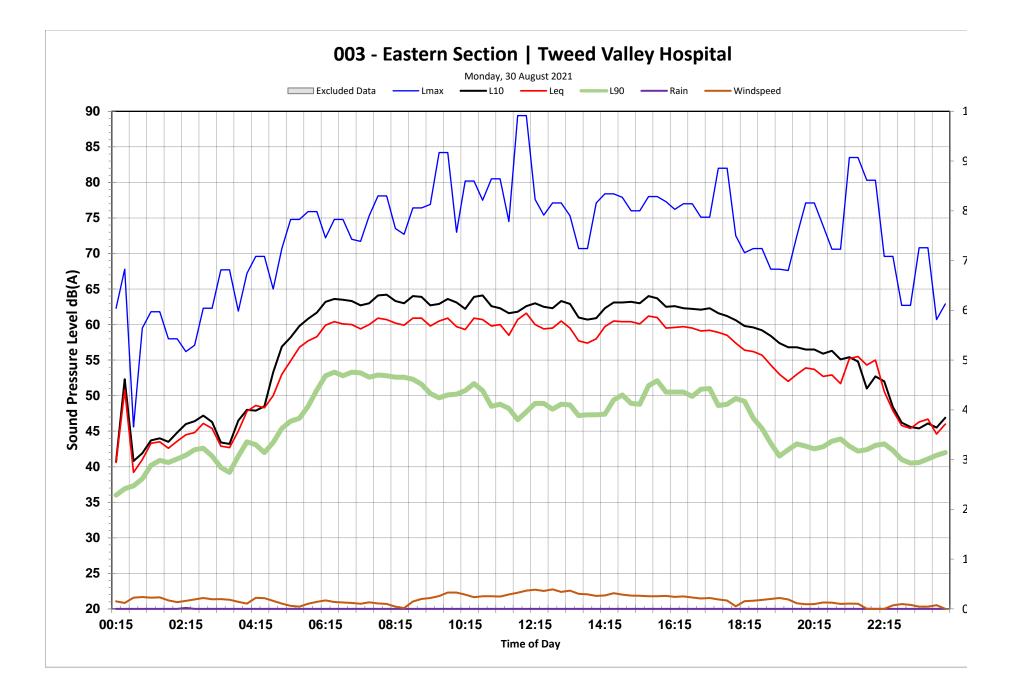

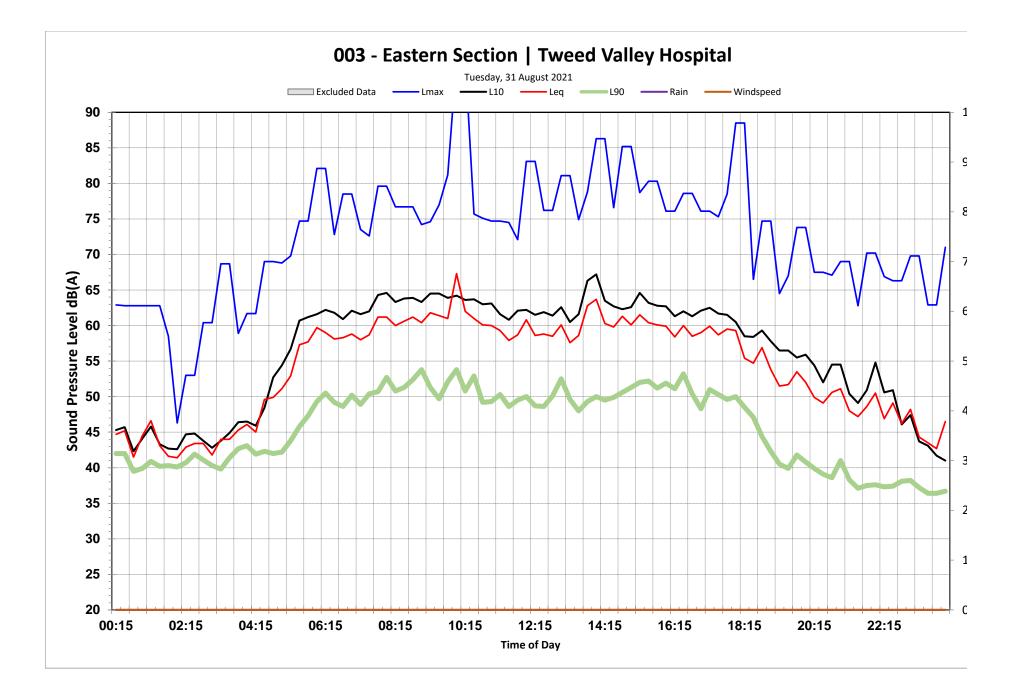





Further details regarding ADE's Services are available via

🖂 info@ade.group 🌐 www.ade.group

ADE Consulting Group Pty Ltd

Sydney Unit 6/7 Millennium Court, Silverwater, NSW 2128 Australia

ADE Consulting Group (QLD) Pty Ltd

Brisbane Unit 10/53 Metroplex Avenue, Murarrie, 4172 QLD, Australia Newcastle Unit 9/103 Glenwood Drive Thornton, NSW 2322, Australia

ADE Consulting Group (VIC) Pty Ltd

Melbourne Unit 4/95 Salmon Street Port Melbourne, VIC 3207, Australia